

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0473002000](#)
Status: **Active**
Overview: [slimline serial ata odd connectors](#)
Description: 1.00mm (.039"), 1.27mm (.050") Pitch Slimline Serial ATA Receptacle for Optical Disk Drive, Right Angle, Standard Type

Documents:

[3D Model](#) [Product Specification PS-47300-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR 19980

General

Product Family PCB Receptacles
 Series [47300](#)
 Application Board-to-Board
 Comments Screw version
 Overview [slimline serial ata odd connectors](#)
 Product Name Serial ATA, Slimline Serial ATA

Physical

Circuits (Loaded) 13
 Circuits (maximum) 13
 Color - Resin Black
 Durability (mating cycles max) 500
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part Yes
 Keying to Mating Part Yes
 Lock to Mating Part No
 Material - Metal Copper Alloy
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Number of Rows 1
 Orientation Right Angle
 PC Tail Length (in) 0.000 In
 PC Tail Length (mm) 0.00 mm
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness Recommended (in) 0.000 In
 PCB Thickness Recommended (mm) 0.00 mm
 Packaging Type Embossed Tape on Reel
 Pitch - Mating Interface (in) 0.039 In, 0.050 In
 Pitch - Mating Interface (mm) 1.00 mm, 1.27 mm
 Pitch - Term. Interface (in) 0.039 In, 0.050 In
 Pitch - Term. Interface (mm) 1.00 mm, 1.27 mm
 Plating min: Mating (µin) 4
 Plating min: Mating (µm) 0.1
 Plating min: Termination (µin) 40
 Plating min: Termination (µm) 1
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Stackable No
 Temperature Range - Operating -35°C to +85°C



Series

image - Reference only

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[47300Series](#)

Mates With

[473001xxx Slimline Serial ATA Plugs](#)

Termination Interface: Style

Surface Mount

Electrical

Current - Maximum per Contact

1.5A

Grounding to PCB

Yes

Voltage - Maximum

15V DC

Material Info

Reference - Drawing Numbers

Product Specification



PS-47300-001

Sales Drawing


SD-47300-200

This document was generated on 05/26/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

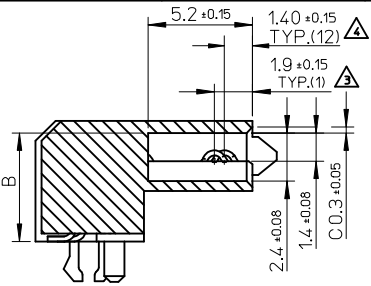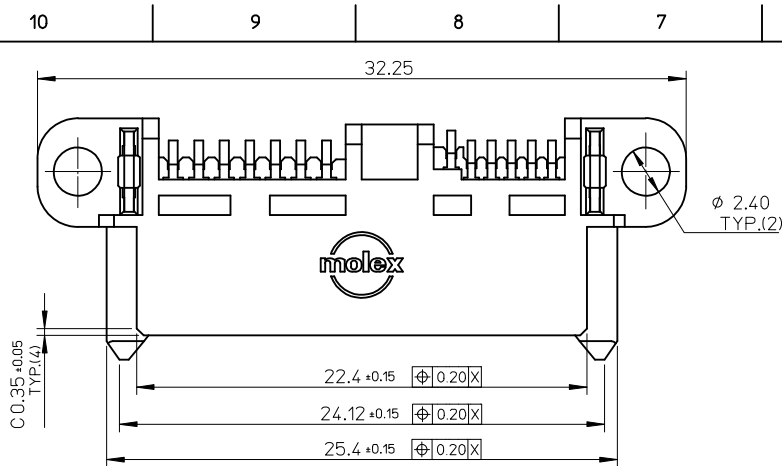




SECTION A-A




SECTION B-B
(8:1)

NOTES :

- 1.MATERIAL :
HOUSING : HIGH TEMPERATURE THERMOPLASTIC,
UL94V-0, 30% G.F., BLACK
TERMINAL : COPPER ALLOY
FORKLOCK : COPPER ALLOY
- 2.PLATING :
TERMINAL :
CONTACT AREA : GOLD PLATING, DETAIL REFER TO CHART.
SOLDER AREA : MATTE TIN PLATING 1 MICRONS MIN.
UNDERPLATING : NICKEL PLATING 2.5 MICRONS MIN.
FORKLOCK :
MATTE TIN PLATING 1 MICRONS MIN. OVER NICKEL PLATING
1 MICRONS MIN.
- 3.FOR P1 PIN ONLY.
4.FOR ALL OTHER PINS.
- 5.PRODUCT SPECIFICATION: PS-47300-001.
- 6.THE PRODUCT COMPLIANT TO RoHS DIRECTIVE 2002/95/EC
AND 2000/53/EC.

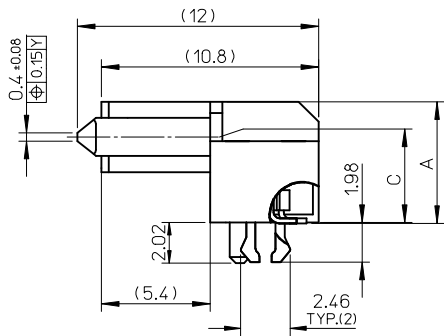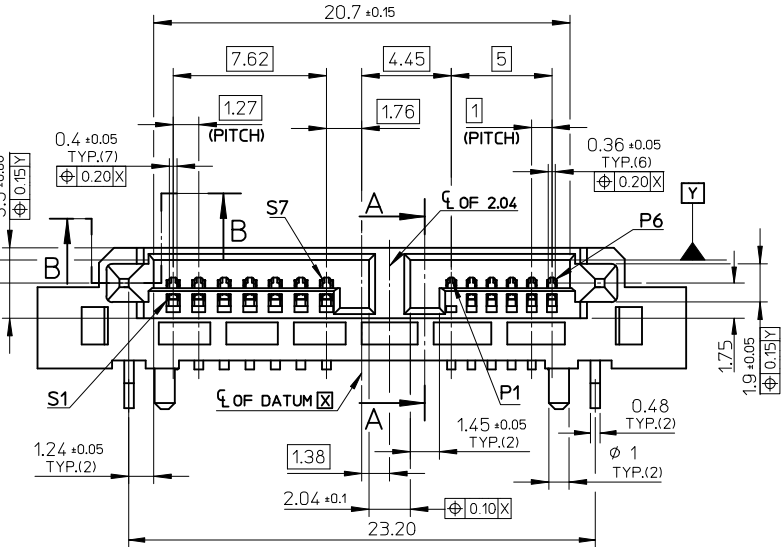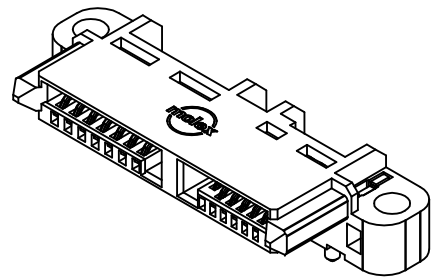

P/N	CONTACT PLATING SPEC	DIM'A'	DIM'B'	DIM'C'
47300-2000	GOLD FLASH	6	5.4	4.25
47300-2100	GOLD 15 u" MIN			
47300-2200	GOLD 30 u" MIN			

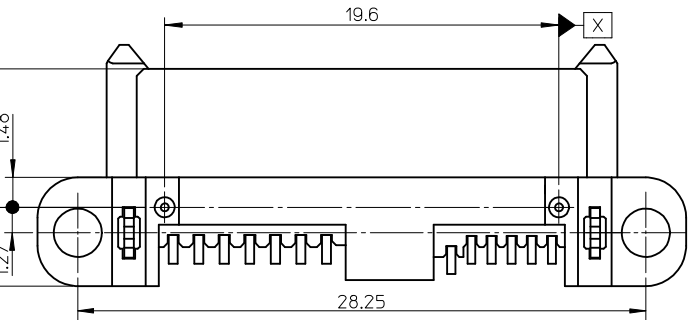


NO CHANGE	EC NO:	2009/07/28	2009/07/28	2009/09/02
DRWN:X.ZHANG	CHKD:GLL	APPR:X.JSONG	DESCRIPTION	REV


QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
▽=0	4 PLACES ± ---	± ---
▽=0	3 PLACES ± ---	± ---
	2 PLACES ± 0.15	± ---
	1 PLACE ± 0.20	± ---
	ANGULAR ± 3 °	

DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM ONLY		4:1	METRIC	
DRAWN BY	DATE	TITLE		
DIXON LI	04/04/2006	SLIMLINE SATA RECEPTACLE CONNECTOR STANDARD TYPE		
CHECKED BY	DATE	MOLEX INCORPORATED		
JENNY ZENG	04/04/2006	DOCUMENT NO. SD-47300-200		
APPROVED BY	DATE	SHEET NO. 1 OF 3		
GRATE MA	04/04/2006			
MATERIAL NO.	SEE TABLE			




DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
--	--	---	--

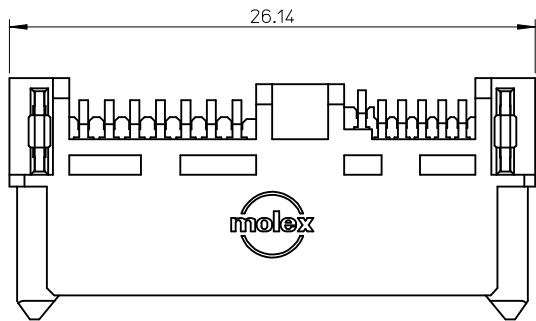


NOTES :
 TERMINAL CONTACT PLATING SPEC: GOLD FLASH,
 OTHER DIMENSIONS AND NOTES REFER TO SHEET-1




SECTION A1-A1

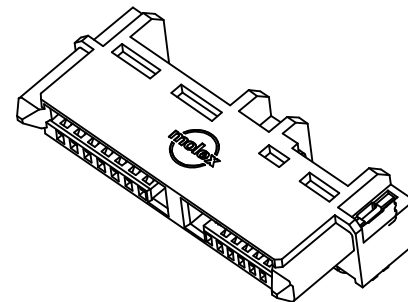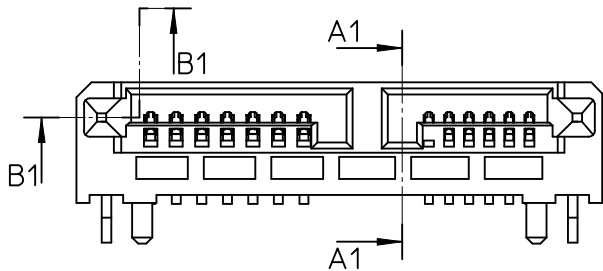


SECTION B1-B1
 (8:1)

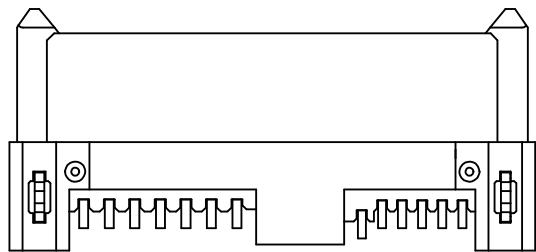


NO CHANGE	EC NO:	2009/07/28	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	DRWN:	XQZHANG		mm	INCH	MM ONLY		4:1	METRIC		
	CHKD:	GLLI		4 PLACES	± ---	± ---	DRAWN BY	DATE	TITLE		
	APPR:	XJSONG		3 PLACES	± ---	± ---	DIXON LI	04/04/2006	SLIMLINE SATA RECEPTACLE CONNECTOR SHORT TYPE		
REV		DESCRIPTION	2 PLACES	± 0.15	± ---	CHECKED BY	DATE	MOLEX INCORPORATED			
			1 PLACE	± 0.20	± ---	JENNY ZENG	04/04/2006	DOCUMENT NO.			
			ANGULAR ± 3 °		APPROVED BY		DATE	SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		GRATE MA		04/04/2006	2 OF 3			
					MATERIAL NO.		47300-2010		SD-47300-200		
					SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
					A3						

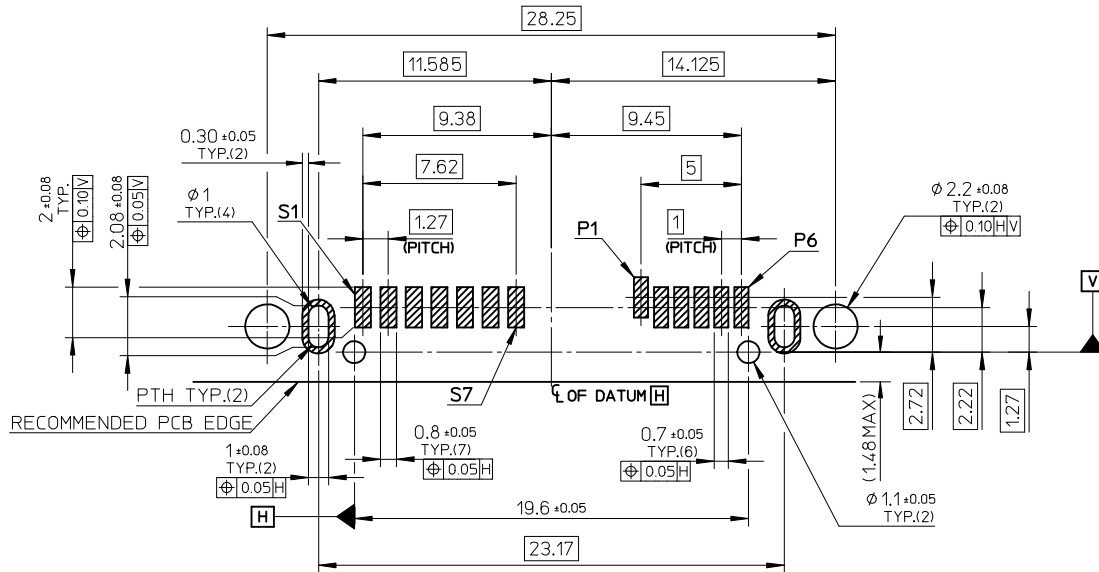


RECOMMENDED PCB LAYOUT
THICKNESS: 1.20±0.05

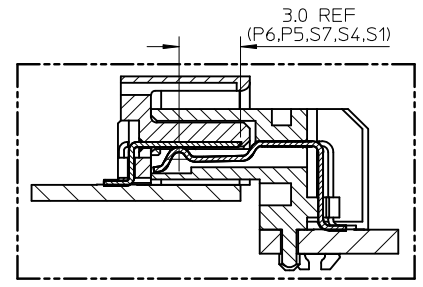

CUTAWAY1

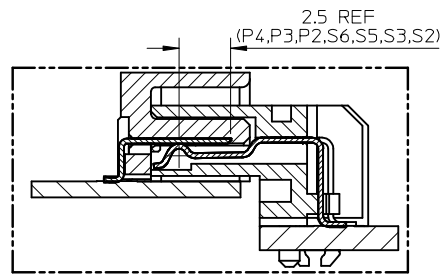

CUTAWAY2

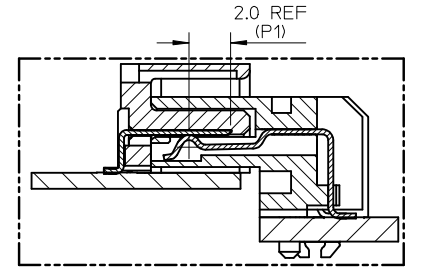

CUTAWAY3

ADD PCB THICKNESS IEC NO: 2009/07/28 DRW: XZHZHANG CH/KD: GLLI APPR: XJ.SONG 2009/09/02	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.15 ± --- 1 PLACE ± 0.20 ± --- ANGULAR ± 3 °	DIMENSION STYLE MM ONLY DRAWN BY: DIXON LI CHECKED BY: JENNY ZENG APPROVED BY: GRATE MA DATE: 04/04/2006	SCALE 4:1 DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	TITLE SLIMLINE SATA RECEPTACLE CONNECTOR	MOLEX INCORPORATED	SHEET NO. 3 OF 3		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE REMARK	DOCUMENT NO. SD-47300-200		
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				