



LIGITEK

LIGITEK ELECTRONICS CO.,LTD.
Property of Ligitek Only

FOUR DIGIT LED DISPLAY (0.39 Inch)



Lead-Free Parts

LFD4K5/63HS-XX/S7-PF

DATA SHEET


DOC. NO : QW0905-LFD4K5/63HS-XX/S7-PF

REV. : A

DATE : 12 - Aug. - 2006



Package Dimensions

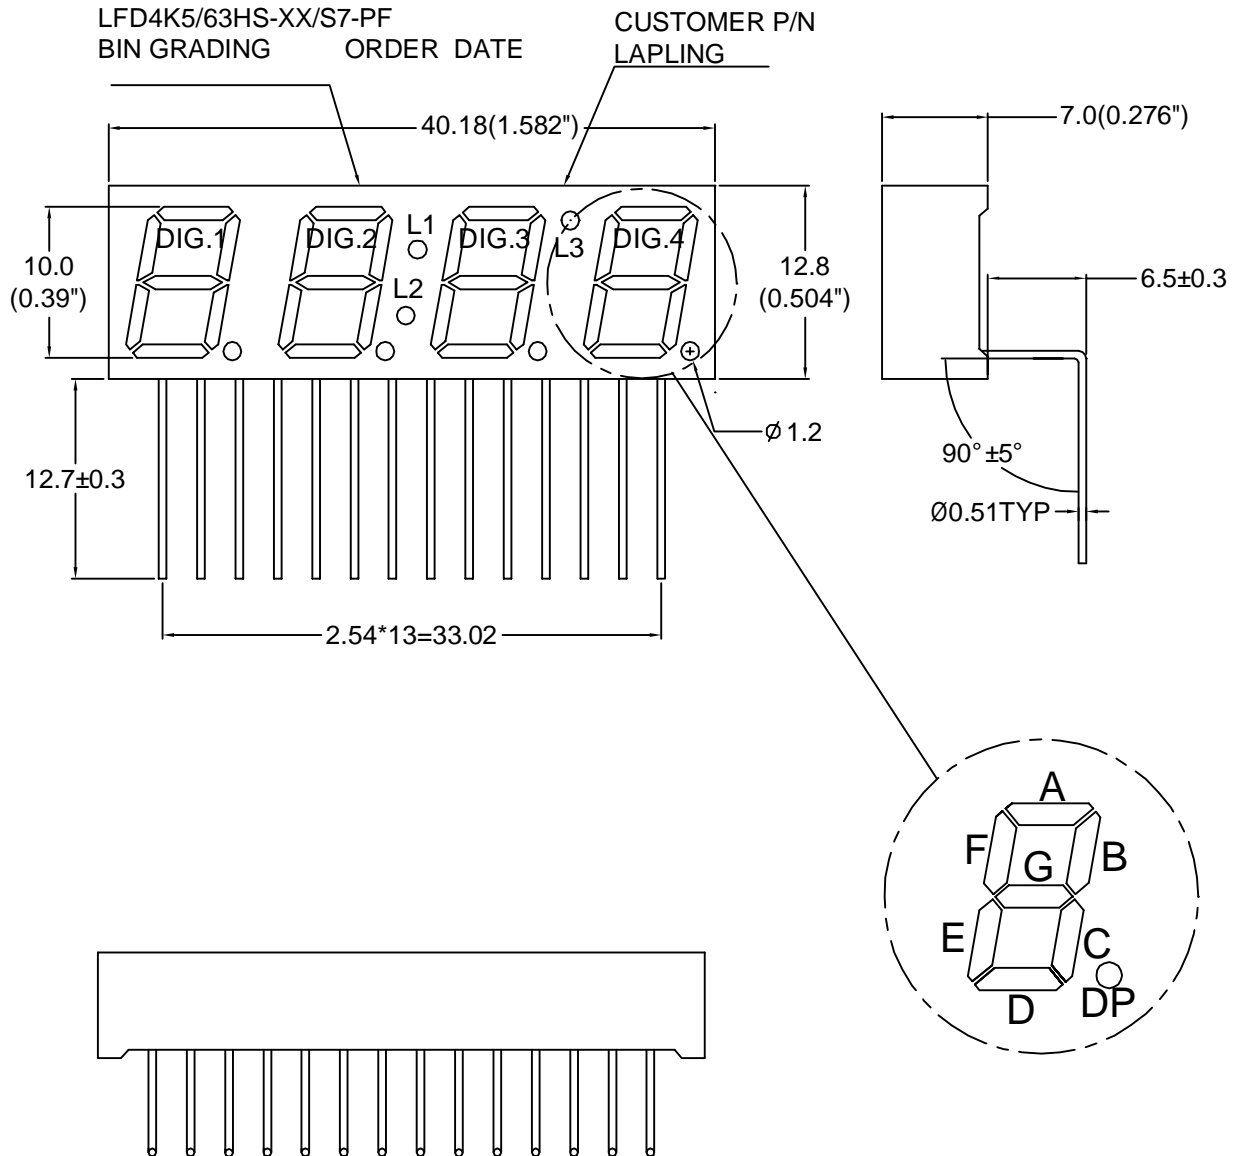



Note : 1.All dimension are in millimeters and (Inch) tolerance is ± 0.25 mm unless otherwise noted.
 2.Specifications are subject to change without notice.



Internal Circuit Diagram

LFD4K53HS-XX/S7-PF

LFD4K63HS-XX/S7-PF

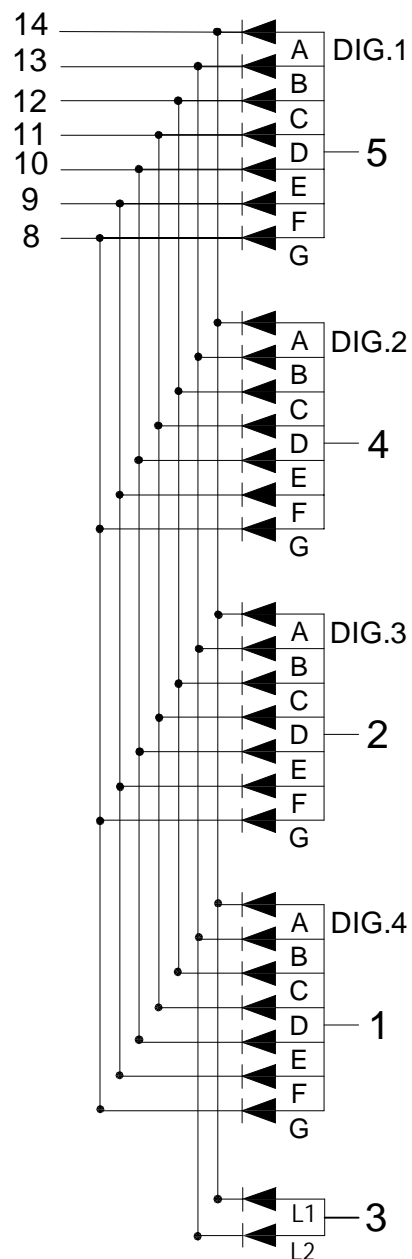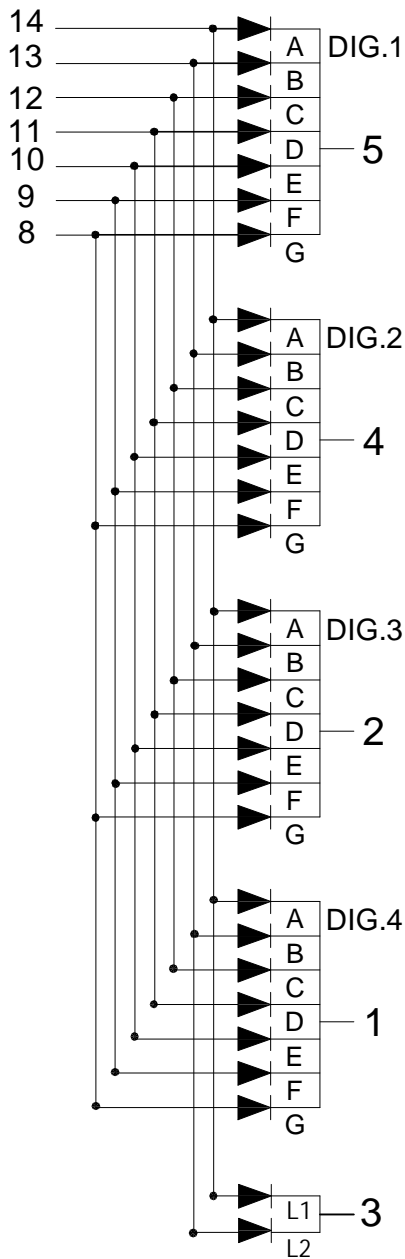



Electrical Connection

| PIN NO.1 | LFD4K53HS-XX/S7-PF | PIN NO.1 | LFD4K63HS-XX/S7-PF |
|----------|----------------------|----------|--------------------|
| 1 | Common Cathode Dig.4 | 1 | Common Anode Dig.4 |
| 2 | Common Cathode Dig.3 | 2 | Common Anode Dig.3 |
| 3 | Cathode L1,L2 | 3 | Anode L1,L2 |
| 4 | Common Cathode Dig.2 | 4 | Common Anode Dig.2 |
| 5 | Common Cathode Dig.1 | 5 | Common Anode Dig.1 |
| 6 | NO CONNECT | 6 | NO CONNECT |
| 7 | NO CONNECT | 7 | NO CONNECT |
| 8 | Anode G | 8 | Cathode G |
| 9 | Anode F | 9 | Cathode F |
| 10 | Anode E | 10 | Cathode E |
| 11 | Anode D | 11 | Cathode D |
| 12 | Anode C | 12 | Cathode C |
| 13 | Anode B,L2 | 13 | Cathode B,L2 |
| 14 | Anode A,L1 | 14 | Cathode A,L1 |



Absolute Maximum Ratings at Ta=25 °C

| Parameter | Symbol | Ratings | UNIT |
|--------------------------------------------------------------------------|--------|-----------|------|
| | | HYS | |
| Forward Current Per Chip | IF | 30 | mA |
| Peak Forward Current Per Chip (Duty 1/10,0.1ms Pulse Width) | IFP | 60 | mA |
| Power Dissipation Per Chip | PD | 75 | mW |
| Reverse Current Per Any Chip | Ir | 10 | μA |
| Electrostatic Discharge(*) | ESD | 2000 | V |
| Operating Temperature | Topr | -25 ~ +85 | °C |
| Storage Temperature | Tstg | -25 ~ +85 | °C |
| Solder Temperature 1/16 Inch Below Seating Plane For 3 Seconds At 260 °C | | | |

★ Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling these LED. All devices, equipment and machinery must be properly grounded.

Part Selection And Application Information(Ratings at 25°C)

| PART NO | CHIP | | common cathode or anode | λ D (nm) | Δ λ (nm) | Electrical | | | | IV-M |
|--------------------|----------|---------|-------------------------|----------|----------|------------|------|---------|------|------|
| | Material | Emitted | | | | Vf(v) | | Iv(mcd) | | |
| | | | | | | Min. | Max. | Min. | Typ. | |
| LFD4K53HS-XX/S7-PF | AlGaInP | Yellow | Common Cathode | 587 | 15 | 1.7 | 2.6 | 12.8 | 17.0 | 2:1 |
| LFD4K63HS-XX/S7-PF | | | Common Anode | | | | | | | |

Note : 1.The forward voltage data did not including ±0.1V testing tolerance.
2. The luminous intensity data did not including ±15% testing tolerance.

**Test Condition For Each Parameter**

| Parameter | Symbol | Unit | Test Condition |
|-----------------------------------|------------------|---------|----------------------|
| Forward Voltage Per Chip | V _f | volt | I _f =20mA |
| Luminous Intensity Per Chip | I _v | mcd | I _f =10mA |
| Dominant Wavelength | λ_D | nm | I _f =20mA |
| Spectral Line Half-Width | $\Delta \lambda$ | nm | I _f =20mA |
| Reverse Current Any Chip | I _r | μA | V _r =5V |
| Luminous Intensity Matching Ratio | IV-M | | |



Typical Electro-Optical Characteristics Curve

HYS CHIP

Fig.1 Forward current vs. Forward Voltage

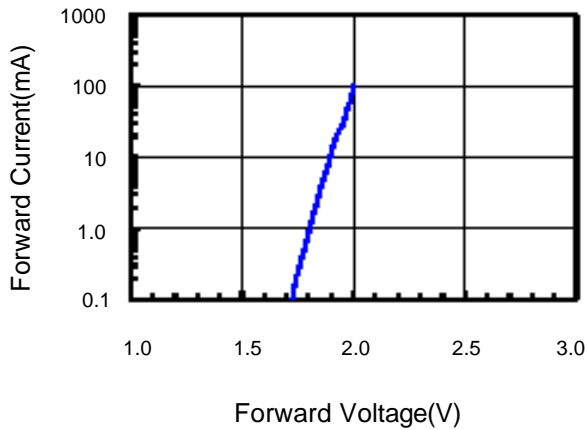


Fig.2 Relative Intensity vs. Forward Current

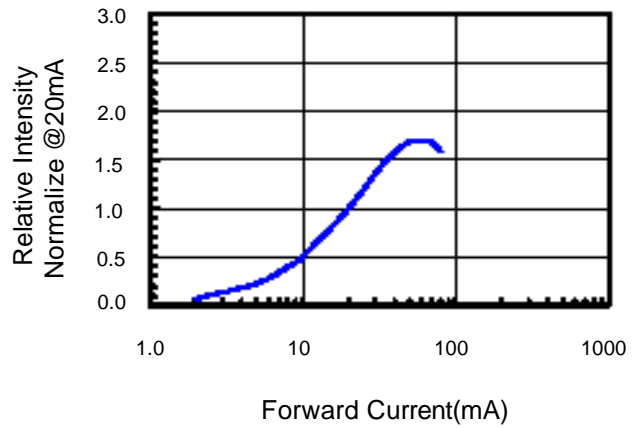


Fig.3 Forward Voltage vs. Temperature

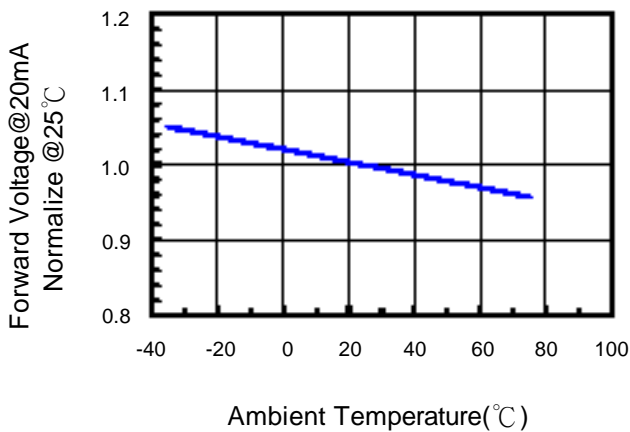


Fig.4 Relative Intensity vs. Temperature


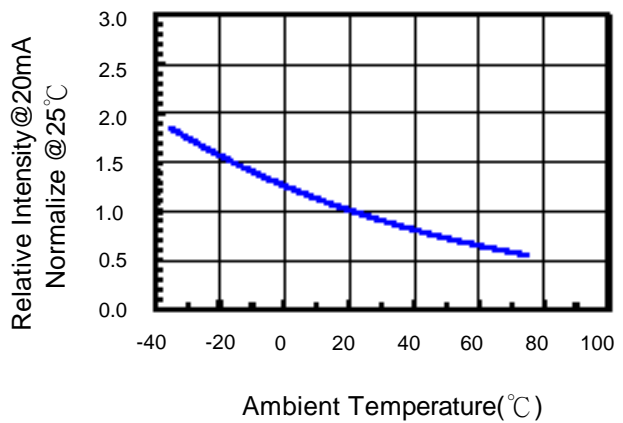


Fig.5 Relative Intensity vs. Wavelength



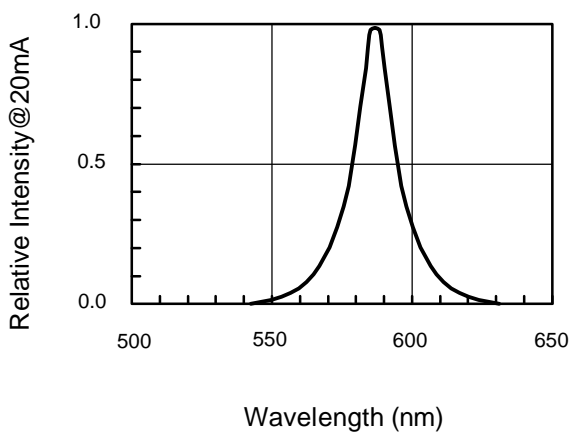

Soldering Condition(Pb-Free)

1.Iron:

Soldering Iron:30W Max

Temperature 350° C Max

Soldering Time:3 Seconds Max(One Time)

Distance:Solder Temperature 1/16 Inch Below Seating
Plane For 3 Seconds At 260° C

2.Wave Soldering Profile

Dip Soldering

Preheat: 120° C Max

Preheat time: 60seconds Max

Ramp-up


2° C/sec(max)

Ramp-Down:-5° C/sec(max)

Solder Bath:260° C Max

Dipping Time:3 seconds Max

Distance:Solder Temperature 1/16 Inch Below Seating
Plane For 3 Seconds At 260° C

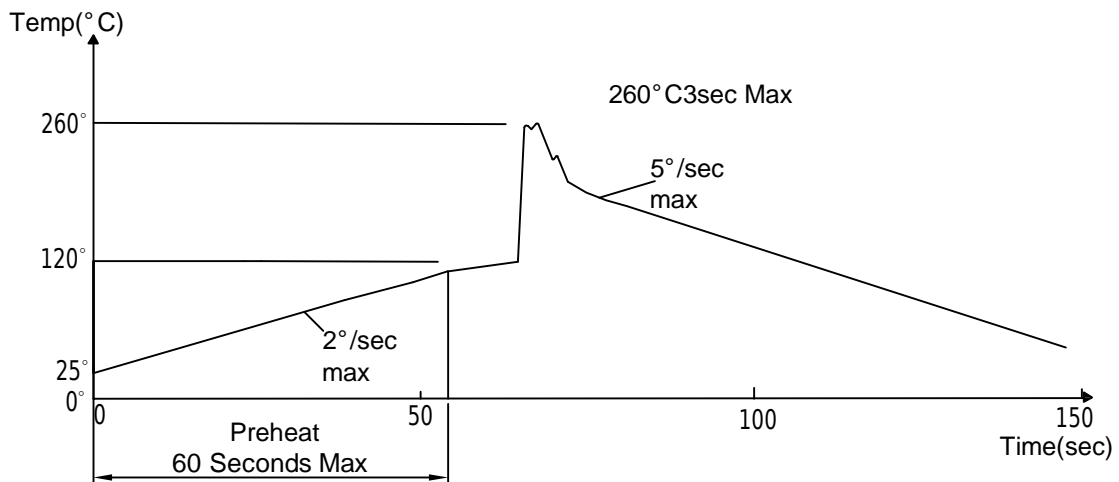

**Reliability Test:**

| Test Item | Test Condition | Description | Reference Standard |
|-------------------------------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Operating Life Test | 1.Under Room Temperature 2.If=10mA 3.t=1000 hrs (-24hrs, +72hrs) | This test is conducted for the purpose of determining the resistance of a part in electrical and thermal stressed. | MIL-STD-750: 1026 MIL-STD-883: 1005 JIS C 7021: B-1 |
| High Temperature Storage Test | 1.Ta=105 °C±5°C 2.t=1000 hrs (-24hrs, +72hrs) | The purpose of this is the resistance of the device which is laid under condition of high temperature for hours. | MIL-STD-883:1008 JIS C 7021: B-10 |
| Low Temperature Storage Test | 1.Ta=-40 °C±5°C 2.t=1000 hrs (-24hrs, +72hrs) | The purpose of this is the resistance of the device which is laid under condition of low temperature for hours. | JIS C 7021: B-12 |
| High Temperature High Humidity Test | 1.Ta=65 °C±5°C 2.RH=90%~95% 3.t=240hrs±2hrs | The purpose of this test is the resistance of the device under tropical for hours. | MIL-STD-202:103B JIS C 7021: B-11 |
| Thermal Shock Test | 1.Ta=105 °C±5°C & -40 °C±5°C (10min) (10min) 2.total 10 cycles | The purpose of this is the resistance of the device to sudden extreme changes in high and low temperature. | MIL-STD-202: 107D MIL-STD-750: 1051 MIL-STD-883: 1011 |
| Solder Resistance Test | 1.T.Sol=260 °C±5°C 2.Dwell time= 10 ±1sec. | This test intended to determine the thermal characteristic resistance of the device to sudden exposures at extreme changes in temperature when soldering the lead wire. | MIL-STD-202: 210A MIL-STD-750: 2031 JIS C 7021: A-1 |
| Solderability Test | 1.T.Sol=230 °C±5°C 2.Dwell time=5 ±1sec | This test intended to see soldering well performed or not. | MIL-STD-202: 208D MIL-STD-750: 2026 MIL-STD-883: 2003 JIS C 7021: A-2 |