


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- High Current Capability
- Extremely Low Thermal Resistance
- For Surface Mount Application
- Higher Temp Soldering : 250°C for 10 Seconds at Terminals
- Low Reverse Current

SMC

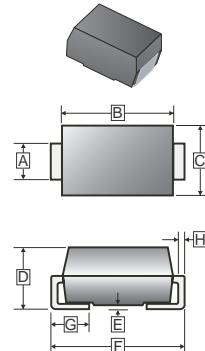

MECHANICAL DATA

- Case: Molded Plastic
- Epoxy: UL 94V-0 Rate Flame Retardant
- Lead: Axial Leads, Solderable per MIL-STD-202 method 208 Guaranteed
- Polarity: Color Band Denotes Cathode End
- Mounting Position: Any

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.75	3.15	E	-	0.203
B	6.60	7.11	F	7.75	8.13
C	5.59	6.22	G	0.76	1.27
D	2.00	2.62	H	0.15	0.31

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.


TYPE NUMBER	SYMBOL	SM5200C		UNITS
Peak Repetitive Peak reverse voltage	V_{RRM}			
Working Peak Reverse Voltage	V_{RWM}	200		V
Maximum DC Blocking Voltage	V_R			
Average Forward Current @ $T_J=25^\circ\text{C}$	$I_{F(AV)}$	5		A
Peak Forward Current @ 8.3 ms Half Sine	I_{FSM}	150		A
Maximum Instantaneous Forward Voltage $V_F @ I_{FM} = 5.0 \text{ A}, T_A = 25^\circ\text{C}$ $V_F @ I_{FM} = 5.0 \text{ A}, T_A = 75^\circ\text{C}$ $V_F @ I_{FM} = 5.0 \text{ A}, T_A = 125^\circ\text{C}$	V_F	0.88 0.78 0.72		V
Maximum DC Reverse Current (Note 3) At Rated DC Blocking Voltage @ $T_J = 25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_J = 100^\circ\text{C}$	I_R	40 700		μA
Typical Junction Capacitance	C_J	250		pF
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	20		$^\circ\text{C}/\text{W}$
Voltage Rate of Change (Rated V_R)	dv/dt	1000		$\text{V}/\mu\text{s}$
Operating Temperature Range	T_J	-50 ~ + 150		$^\circ\text{C}$
Storage temperature	T_{STG}	-65 ~ + 150		$^\circ\text{C}$

NOTES:


1. Measured at 1MHz and applied reverse voltage of 5.0 V D.C.
2. Thermal Resistance Junction to Lead
3. Pulse Test : Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

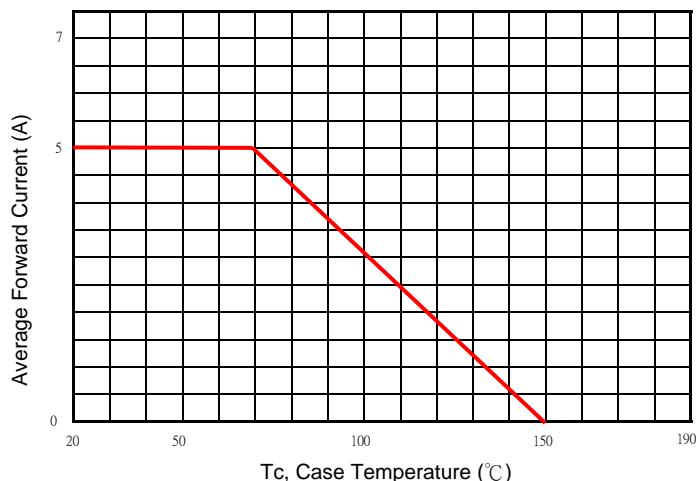


Typical Forward Characteristic

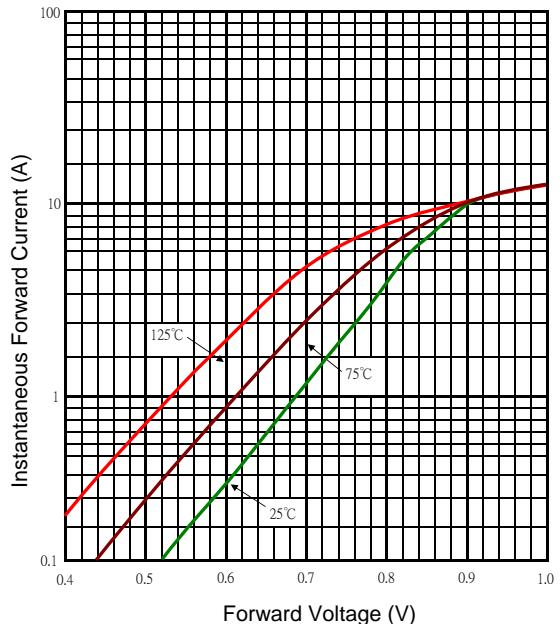

Typical Junction Capacitance

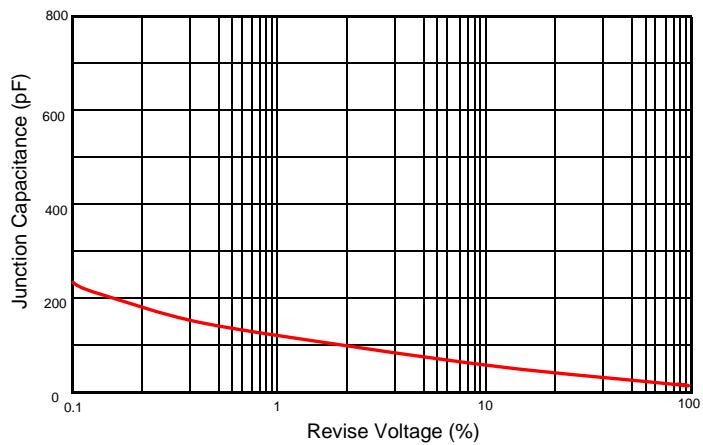

Typical Reverse Characteristic

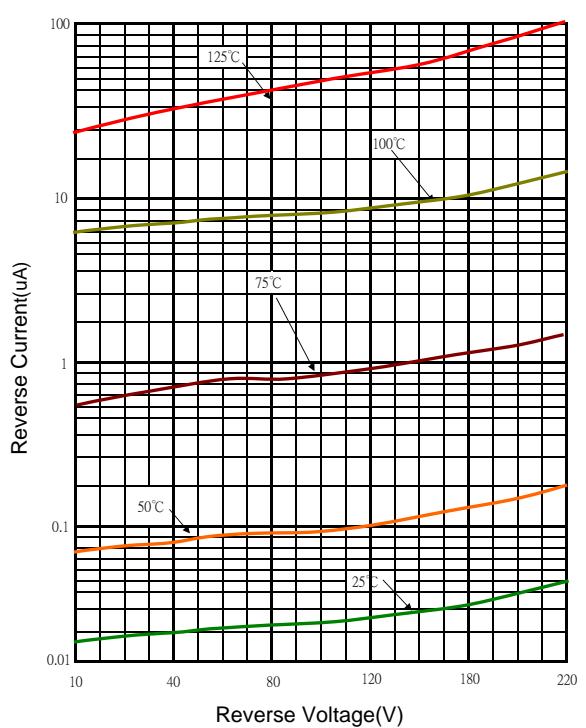

Maximum Non-Repetitive Forward Surge Current

