



CBB61 AC Metallized Film Capacitor

CBB61 Metallized Film Capacitor


技術參數 Technical Specification :

型號 Type	環境溫度 Ambient Temperature (°C)	額定電壓 Rated voltage (VAC)	容量範圍 Rated capacitance (μF)	試驗電壓 Test voltage (VAC)	絕緣電阻 Insulation Resistance	損耗角正切 Dissipation Factor
CBB61	-40~+70°C	250~630	0.4~20	T-T:1.5Un/60S 1.75Un/10S 2Un/2S	T-T: $\geq 3000S$	MPP: $tg \delta \leq 0.002(100Hz)$
	-40~+85°C			T-C:2000VAC/60S	T-C: $\geq 1000M\Omega$	MPET: $tg \delta \leq 0.005(100Hz)$

執行標準 Executing Standards : GB3667-91 ; UL810 ; VDE EN60252 (IEC60252)

電容量精度 : $\pm 5\%$ 或按用戶要求生產

Capacitance Tolerance : $\pm 5\%$ or according with the request of customers

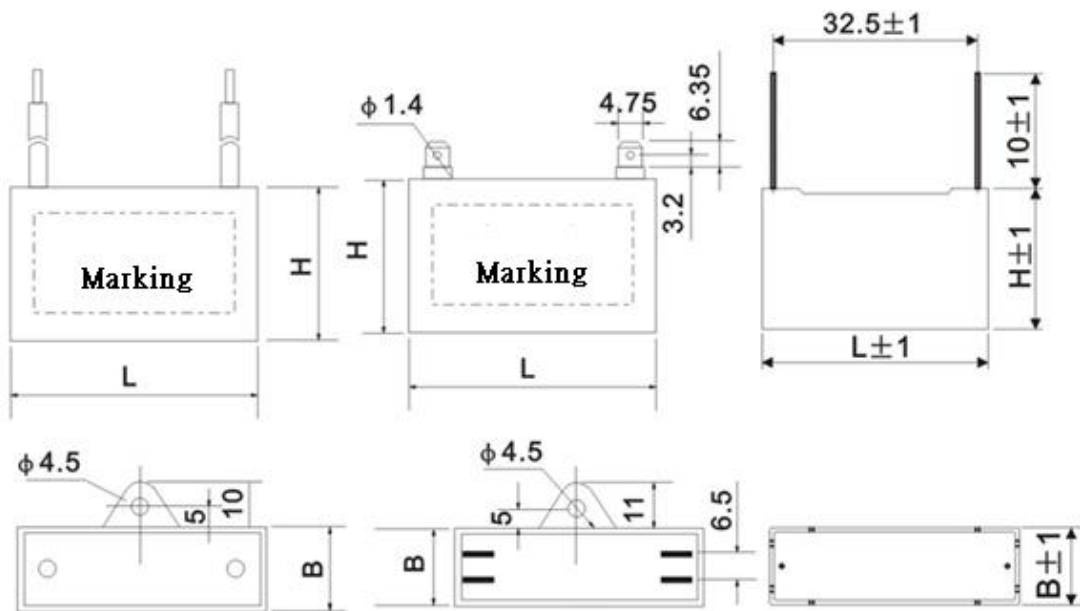

Da Hua (Hong Kong) Development Co.
 Address: G/F 397 Shanghai Street, Mongkok, Hong Kong
 Tel:852 26269193 Fax:852 26269229
 Email:sales@dahuahk.com Website:www.dahuahk.com

外形尺寸 Outline Size :

L (mm)	H (mm)	B (mm)	L (mm)	H (mm)	B (mm)	L (mm)	H (mm)	B (mm)
37	24	13.5	47	31	17	32	22	12
37	27	14.5	47	33	20	32	21	13
38	25	15	47	35	20.5	32	22	13
38	25	18.5	47	37	26	32	25	15
38	27	19	47	38	31			
38	29	18.5		(雙耳) dual ears				
38	31	19	47	32	22			
38	30	22	47	42	25			
38	30	16	47	49	33			
38	34	23						

注：特殊規格可協商生產。

Note : Exceptional specifications can be produced on consultation .