


Search


VTB2-XXX Miniature TCXOs

- Featuring**
- +3.0 or 5.0 Vdc Option
 - Low Cost
 - Voltage Tune Option
 - Low Profile Surface Mount
 - Reflowable



Frequency Range	9.6 to 25 MHz
Stability Options	1 = ±1.0 PPM 0°C to +50°C 2 = ±2.5 PPM -30°C to +70°C 3 = ±3.5 PPM -30°C to +70°C 4 = ±5.0 PPM -40°C to +85°C
Stability vs Supply	<±0.3 PPM vs B+ ±5%
Aging (Typical)	<1.0 PPM/year at +40°C dynamic
Input Voltage & Current	A = +5.0 Vdc ±5% <2 mA B = +3.0 Vdc ±5% <1.5 mA
Output	Clipped Sinewave 1.0 VP-P minimum with 5.0 Vdc input 0.7 VP-P minimum with 3.0 Vdc input
Load	10 K Ω // 10 pf
Mechanical Trim	±3.0 PPM Minimum
Trim Options	0 = Mechanical Trim 1 = ±5.0 PPM minimum Voltage Control & Mechanical Trimmer
Standard Packaging	<1000 pcs boxed >1000 pcs Tape and Reel
Typical P/N	VTB2-2B0 12.8 MHz 2 = ±2.5 PPM B = +3.0 Vdc 0 = Mechanical trim adjust

We welcome your custom requests and will issue a custom part number for items that are not listed.

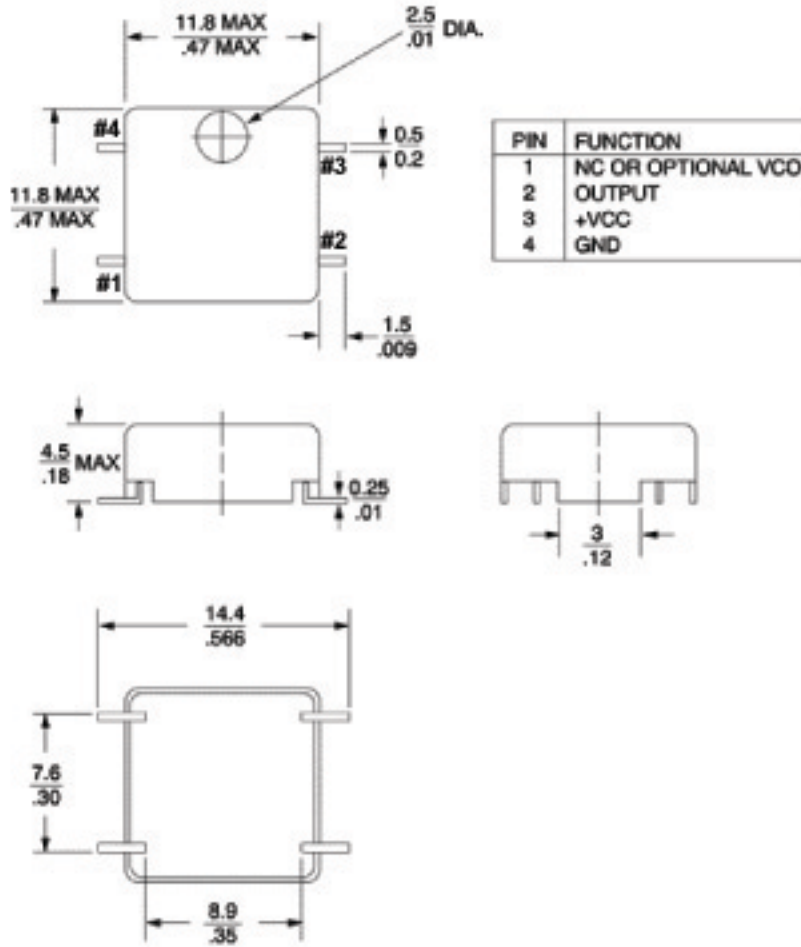

For additional information please contact:

USA: Vectron International ~ 267 Lowell Road, Hudson, NH 03051
 Tel: 1-88-VECTRON-1 ~ Fax: 1-888-FAX-VECTRON ~ Email: vectron@vectron.com
 EUROPE: Tel: 49 (0) 3328 4784 17 • Fax: 49 (0) 3328 4784 30
 ASIA: Tel: +86 21 28909740 / 41 / 42 • Fax: +86 21 28909240 / 2890999