

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1120005029](#)
Status: **Active**
Description: BradCommunications™ Direct-Link™ PCU-ETHIO Ethernet card for Modbus TCP/UDP Client, PCI 3.3/ 5V bus, RoHS compliant

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

| | |
|---------------------|------------------------|
| Product Family | Network Interface |
| Series | 112000 |
| Approvals | CE |
| Communication Speed | 10 / 100 Mbaud (Auto) |
| Mounting Style | N/A |
| Product Name | Direct-Link® |
| Protocol | Modbus* TCP |
| Type | PC Card |

Physical

| | |
|-------------------------------|----------------|
| Channels | 1 |
| Interface | Ethernet |
| Network Connection Type | Ethernet: RJ45 |
| Packaging Type | Carton |
| Processor | AMD SC520 |
| Temperature Range - Operating | 0°C to +65°C |

Electrical

| | |
|-------------------------|------------------------------------------------------------|
| Current - Maximum Input | 5.5W |
| EMC | EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2 |
| Supply Voltage | N/A |

Material Info

| | |
|-----------------|-------------|
| Old Part Number | DRL-EMB-PCU |
|-----------------|-------------|

Reference - Drawing Numbers

| | |
|---------------|---------------|
| Sales Drawing | E-112000-5029 |
|---------------|---------------|

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Not Reviewed**
**Halogen-Free
Status
Not Reviewed**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[112000Series](#)



BradCommunications™ applicomIO® Ethernet network interface cards provide powerful and reliable data acquisition for PC-based control and visualization applications.

applicomIO® PCU-ETHIO

Best Choice for controlling I/O over Modbus Ethernet

Features

- Protocols:
 - Modbus TCP Client
 - Modbus UDP Client
- Reliable solution based on embedded protocol technology for powerful data throughput
- Single-time development of API for whatever fieldbus used
- “User-friendly” engineering tools for configuration and diagnostics
- Remote connection through Ethernet port (for embedded system platform)
- Application watchdog
- Automatic I/O mapping for easy configuration
- I/O exchange up to 14 Kbytes

Typical Application

- PC-Based Control
- Robotic application
- Panel PC visualization system

Supported OS


Standard package

- Windows 32-bit (XP , 2000, 2003 Server), VenturCom RTX

Free Download


- Windows XP Embedded, QNX, VxWorks, Linux, Phar Lap ETS, DOS

MODBUS TCP



WIND RIVER VxWorks

CE RoHS

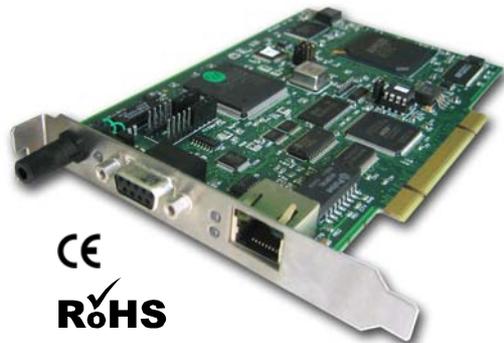

Overview

Some of the world's most demanding high-speed control and automation applications run on standard PCs using BradCommunications™ applicomIO® fieldbus interface cards. Dedicated DCS and PLC systems have been eliminated in favor of open platforms running PC-based control systems.

The benefits include:

- Reduced material costs
- More flexible and customizable systems
- Reduced development times
- Reduced field-support costs

applicomIO products are design so industrial applications can be designed independently of the fieldbus used. **OEMs, system integrators** and **end-users** can take advantage of developing standard control applications as well as selecting the fieldbus connectivity required from the applicomIO product range.

applicomIO products consist of a fieldbus card and engineering tools which quickly and easily setup communication. EVERYTHING is included for a successful implementation at a lower cost.

applicomIO provides connectivity support for all popular fieldbuses including **EtherNet/IP, PROFINET IO, Modbus TCP, PROFIBUS, DeviceNet** and **CANopen**. Our cards are developed in compliance with the technical specifications of industrial organizations and comply with the applicable industrial standards. applicomIO supports up to 8 cards in a single PC and can run on various operating systems including Windows 32-bits, Linux as well as real-time OS such as VxWorks, QNX, and VenturCom RTX.

Particularly, the applicomIO® **PCU-ETHIO** network interface card provides high-speed deterministic communication to exchange data with industrial devices through **Modbus Ethernet messaging**. The built-in processor handles all the protocol management to offer reliable and outstanding performance.

The software package includes a common development library for all fieldbuses supported. The process data is exchanged with the control application through a shared memory where inputs/outputs are automatically mapped. To monitor the communication between the card and the control application, the library includes a watchdog feature to automatically detect software blocking.

ARE YOU LOOKING FOR A REAL TURNKEY SOLUTION?

applicomIO® configuration software console provides a standardized and user-friendly environment for quick development of communication applications without the worry of knowing industrial communication protocols. The console saves time during the commissioning phase by offering features such as automatic device detection, user configuration management, diagnostic information, etc.

The product includes:


- Fieldbus interface card
- Engineering console for configuration and diagnostics
- Data Servers (OPC DA v3.0 & v2.05, Wonderware DAServer and FastDDE/SuiteLink)
- Development Libraries: Windows (DLL), NI (LabView), VenturCom (RTX)
- Static library for non-windows OS (VxWorks, QNX, Linux, etc)

applicomIO® PCU-ETHIO




Software tools



applicomIO® software tools enable fast integration of the fieldbus into your control application. No matter the fieldbus; the console remains the same.

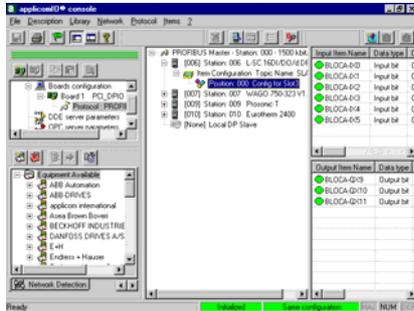

- Configuration console -

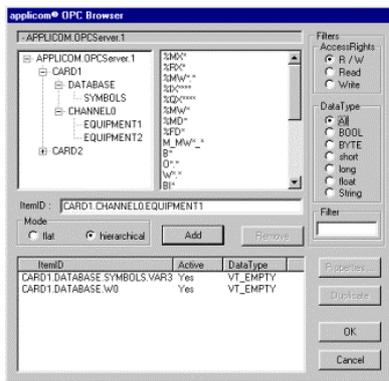

- OPC Browser -

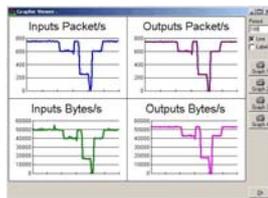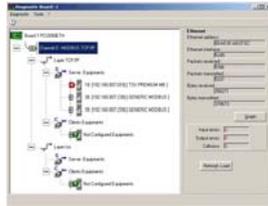

- Diagnostic and Test tools -

Hardware specifications

| | |
|------------------------------|--------------------------------------------------------------------------------|
| Bus interface | PCI rev 2.2, 32-bit, 33 MHz, PCI Universal 3.3V/5V keying, PCI-X compatible |
| Processor | AMD SC520 - 133 MHz |
| Memory | SDRAM: 16 Mbytes Flash: 4 Mbytes |
| Interrupt | Hardware Plug&Play |
| DPRAM Address | Hardware Plug&Play (32 Kbytes used per card) |
| Dimensions (L x W) | 168mm x 107mm (6.61" x 4.21") |
| Consumption | 5.5 W |
| Operating Temperature | 0° C (32° F) ↔ +65° C (149° F) |
| Storage Temperature | -40° C (-40° F) ↔ +85° C (185° F) |
| Discrete Input | 1x Opto-coupled |
| Discrete Output | 1x "WatchDog" (dry contact) |
| EMC Compliance | EN55022 Class B, EN61000-6-2, EN61000-3-2, EN61000-3-3 |
| RoHS Compliance | YES |

1 Ethernet port

| | |
|-----------------------|------------------------------------------------------|
| Port type | Ethernet port IEEE 802.3 for industrial applications |
| Connector type | BaseT (RJ45) |
| Speed | 10/100 Mbps (Auto-negotiation) |
| LED indicators | 4 LEDs - TX, RX, Link, 100 Mbps |
| Remote Access | Also usable for remote and diagnostic configuration |

Protocols supported

| Ethernet TCP/IP | Protocol Specifications |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Modbus TCP (Client mode) | <ul style="list-style-type: none"> Connect Ethernet Modbus devices server according to Modbus-IDA specifications Support both TCP and UDP connection modes Up to 127 simultaneous devices |

Ordering information

| #SAP | Part Number | Product description |
|------------|-------------|---------------------------------------------------------------------------------------------------------|
| 1120005029 | DRL-EMB-PCU | BradCommunications™ Direct-Link™ PCU-ETHIO Ethernet card for Modbus TCP Client , PCI 3.3/ 5V bus |

Also available

| | | |
|------------|-------------|------------------------------------------------------------------------------------------------------------------------------|
| 1120005030 | DRL-EIP-PCU | BradCommunications™ Direct-Link™ PCU-ETHIO Ethernet card for EtherNet/IP Scanner/Adapter , PCI 3.3/ 5V bus |
| 1120005031 | DRL-EPN-PCU | BradCommunications™ Direct-Link™ PCU-ETHIO Ethernet card for PROFINET IO-Controller & IO-Device , PCI 3.3/ 5V bus |

To contact us: www.woodhead.com

Reference Number: DW2008253 Date Published: October 2008

North America: US: +1 800 225 7724 – Canada: +1 519 725 5136

Europe: France: +33 2 32 96 04 20 – Germany: +49 7252 94 96 0– Italy: +39 010 59 30 77 – United: Kingdom +44 1495 356300

Asia: Shanghai, China: +86 21-5835-9885 – Tianjin, China: +86 22-23321717

Singapore: +65 6268-6868 – Yamato, Japan: +81 46-265-2428 – Nagoya, Japan: +81 52-221-5950

Brad and applicomIO are registered trademarks and BradCommunications and Direct-Link are trademarks of Molex © 2008 Molex Incorporated.