

This document was generated on 04/20/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0026613100](#)
Status: **Active**
Description: 3.96mm (.156") Pitch KK® Solid Header, Right Angle, without Peg, 10 Circuits, Gold (Au) Plating

Documents:

[3D Model](#) [Product Specification PS-08-50 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Packaging Specification \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179


General

Product Family PCB Headers
 Series 41772
 Application Board-to-Board, Wire-to-Board
 Product Name KK®

Physical

Breakaway No
 Circuits (Loaded) 10
 Circuits (maximum) 10
 Color - Resin Natural
 Durability (mating cycles max) 100
 Flammability 94V-0
 Glow-Wire Compliant No
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Gold
 Material - Plating Termination Gold
 Material - Resin Polyester
 Number of Rows 1
 Orientation Right Angle
 PC Tail Length (in) 0.140 In
 PC Tail Length (mm) 3.56 mm
 PCB Locator No
 PCB Retention None
 PCB Thickness Recommended (in) 0.062 In
 PCB Thickness Recommended (mm) 1.60 mm
 Packaging Type Bag
 Pitch - Mating Interface (in) 0.156 In
 Pitch - Mating Interface (mm) 3.96 mm
 Plating min: Mating (µin) 20
 Plating min: Mating (µm) 0.5
 Plating min: Termination (µin) 20
 Plating min: Termination (µm) 0.5
 Polarized to Mating Part Yes
 Polarized to PCB No
 Shrouded Partial
 Stackable Yes
 Temperature Range - Operating 0°C to +75°C
 Termination Interface: Style Through Hole

Electrical

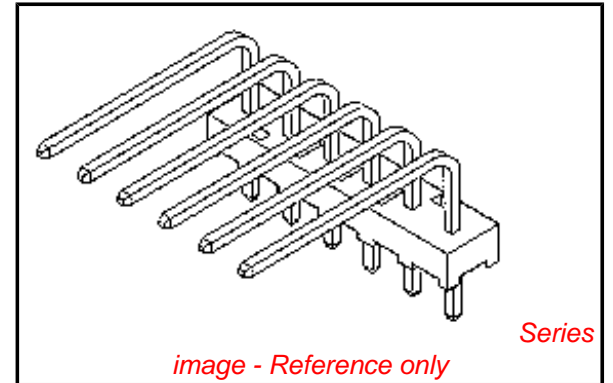

EU RoHS

**ELV and RoHS
 Compliant
 REACH SVHC
 Contains SVHC: No
 Halogen-Free
 Status**

Not Reviewed

China RoHS



**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

41772Series

Mates With

3069 , 2139 , 2145 , 6442 , 7674 , 7675 ,
 41695 , L ink:41815

Current - Maximum per Contact 7A
Voltage - Maximum 250V

WWW.MOLEX.COM

Solder Process Data

Duration at Max. Process Temperature (seconds) 5
Lead-free Process Capability Wave Capable (TH only)
Max. Cycles at Max. Process Temperature 1
Process Temperature max. C 235

Material Info

Old Part Number 41772-0027

Reference - Drawing Numbers





Product Specification PS-08-50
Sales Drawing SDA-41772

This document was generated on 04/20/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

| CKT | DIM. A | DIM. B |
|-----|----------------|--------------------------|
| 2 | 7.77 .306 | 3.96±0.05 .156±.002 |
| 3 | 11.73 .462 | 7.92±0.08 .312±.003 |
| 4 | 15.70 .618 | 11.89±0.08 .468±.003 |
| 5 | 19.66 .774 | 15.85±0.10 .624±.004 |
| 6 | 23.62 .930 | 19.81±0.10 .780±.004 |
| 7 | 27.58 1.086 | 23.77±0.10 .936±.004 |
| 8 | 31.55 1.242 | 27.74±0.13 1.092±.005 |
| 9 | 35.51 1.398 | 31.70±0.13 1.248±.005 |
| 10 | 39.47 1.554 | 35.66±0.13 1.404±.005 |
| 11 | 43.43 1.710 | 39.62±0.15 1.560±.006 |
| 12 | 47.40 1.866 | 43.59±0.15 1.716±.006 |
| 13 | 51.36 2.022 | 47.55±0.15 1.872±.006 |
| 14 | 55.32 2.178 | 51.51±0.18 2.028±.007 |
| 15 | 59.28 2.334 | 55.47±0.18 2.184±.007 |
| 16 | 63.25 2.490 | 59.44±0.18 2.340±.007 |
| 17 | 67.21 2.646 | 63.40±0.20 2.496±.008 |
| 18 | 71.17 2.802 | 67.36±0.20 2.652±.008 |

- NOTES:
- MATERIAL: HEADER-GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
 - FINISH: (102) OVERALL TIN: 0.00508/.000200 MIN OVER 0.00254/.000100 MIN COPPER.
(154) OVERALL TIN: 0.00254/.000100 MIN OVER 0.00127/.000050 MIN NICKEL,
*(208) SELECT GOLD: 0.00038/.000015 MIN, SELECT TIN: 0.00254/.000100 MIN,
OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
*(228) SELECT GOLD: 0.00076/.000030 MIN, SELECT TIN: 0.00254/.000100 MIN,
OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
(501) OVERALL GOLD: 0.00051/.000020 MIN OVER 0.00076/.000030 MIN NICKEL.
(503) OVERALL GOLD: 0.00076/.000030 MIN OVER 0.00127/.000050 MIN NICKEL.
 - *THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.
 - PRODUCT SPECIFICATION AND PROCESS PARAMETERS: SEE PS-08-50.
 - PACKAGING: SEE CHART
 - SOLDERABILITY: PER SMES-152.
 - PIN PUSH-OUT FORCE: PRIOR TO SOLDERING, A 3 LB. MINIMUM FORCE (IN EITHER DIRECTION)
 - PARTS ARE STACKABLE END TO END ON 3.96/.156 CENTERS.
 - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

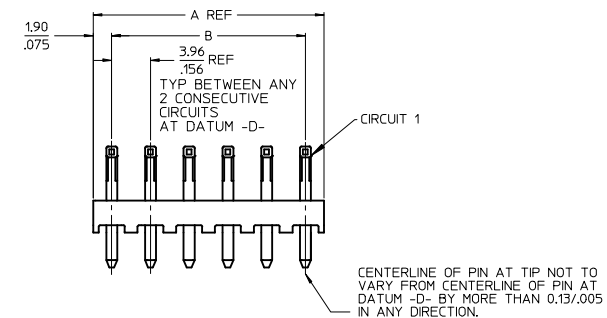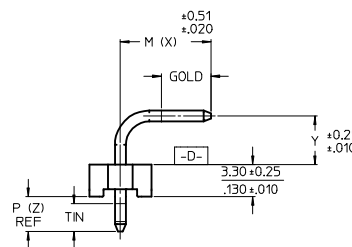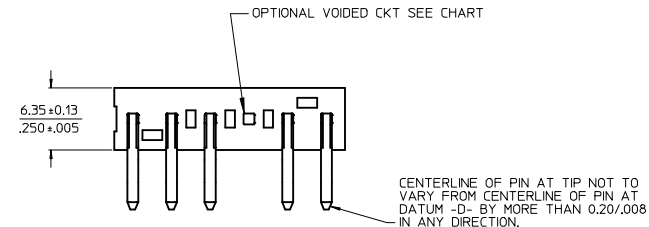

www.DataSheet4U.com RECOMMENDED PC BOARD HOLE LAYOUT

| | |
|-------|-----|
| 2-x | L6 |
| 1 | L6 |
| SHEET | REV |

ADD 41772-0663
EC NO: UCP2010-0165
DRAWN:MKLIPPER 2009/08/10
CHKD:JBELL 2009/08/21
APPR:FSMITH 2009/08/24

QUALITY SYMBOLS
▽=0
▽=0

| | GENERAL TOLERANCES (UNLESS SPECIFIED) | |
|----------|---------------------------------------|--------|
| | mm | INCH |
| 4 PLACES | ± --- | ± --- |
| 3 PLACES | ± --- | ± .010 |
| 2 PLACES | ± 0.25 | ± .015 |
| 1 PLACE | ± 0.38 | ± --- |
| ANGULAR | | ± 1/2° |

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

| DIMENSION STYLE | | SCALE | DESIGN UNITS | THIRD ANGLE PROJECTION |
|-----------------|-----------|------------------------|--------------|------------------------|
| MM/IN | | 2:1 | INCH | THIRD ANGLE PROJECTION |
| DRAWN BY | DATE | TITLE | | |
| SCHAFFER | 11-19-03 | KK 156 HEADER ASSEMBLY | | |
| CHECKED BY | DATE | FLAT RIGHT ANGLE | | |
| SAMIEC | 11-21-03 | SOLID BODY W/O PEGS | | |
| APPROVED BY | DATE | MOLEX INCORPORATED | | |
| MARGULIS | 11-25-03 | DOCUMENT NO. SDA-41772 | | |
| MATERIAL NO. | SEE CHART | SHEET NO. 1 OF * | | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| | | | | | | | | |
|---------|--------------|-------------------|--------------|-------------------|--------------|-------------------|--------------|-------------------|
| OPTIONS | Group | A-41772-0002/0018 | Group | A-41772-0463/0479 | Group | A-41772-0480/0496 | Group | A-41772-0036/0052 |
| | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 |
| | Pin No: | 2161-16(102) | Pin No: | 43294-0470 | Pin No: | 43294-0471 | Pin No: | 2161-52(102) |
| | Plating: | 102 – TIN | Plating: | 208 - 15 GOLD | Plating: | 228 - 30 GOLD | Plating: | 102 – TIN |
| | Pin Length L | 25.40 / 1.000 | Pin Length L | 25.40 / 1.000 | Pin Length L | 25.40 / 1.000 | Pin Length L | 27.00 / 1.063 |
| | Mating M | 14.86 / .585 | Mating M | 14.86 / .585 | Mating M | 14.86 / .585 | Mating M | 16.51 / .650 |
| | Gold Loc G | N/A | Gold Loc G | 7.11/ .280 | Gold Loc G | 7.11/ .280 | Gold Loc G | N/A |
| | Height Y | 4.95 / .195 | Height Y | 4.95 / .195 | Height Y | 4.95 / .195 | Height Y | 4.95 / .195 |
| | PC Tail P | 3.56 / .140 | PC Tail P | 3.56 / .140 | PC Tail P | 3.56 / .140 | PC Tail P | 3.51 / .138 |
| | Tin Loc T | OVERALL | Tin Loc T | 4.06/ .160 | Tin Loc T | 4.06/ .160 | Tin Loc T | OVERALL |
| | Voided Ckts | NONE | Voided Ckts | NONE | Voided Ckts | NONE | Voided Ckts | NONE |
| | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 |
| Ckts | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number |
| 2 | 26-60-3020 | A-41772-0002 | 41772-0463 | A-41772-0463 | 41772-0480 | A-41772-0480 | 26-60-3021 | A-41772-0036 |
| 3 | 26-60-3030 | A-41772-0003 | 41772-0464 | A-41772-0464 | 41772-0481 | A-41772-0481 | 26-60-3031 | A-41772-0037 |
| 4 | 26-60-3040 | A-41772-0004 | 41772-0465 | A-41772-0465 | 41772-0482 | A-41772-0482 | 26-60-3041 | A-41772-0038 |
| 5 | 26-60-3050 | A-41772-0005 | 41772-0466 | A-41772-0466 | 41772-0483 | A-41772-0483 | 26-60-3051 | A-41772-0039 |
| 6 | 26-60-3060 | A-41772-0006 | 41772-0467 | A-41772-0467 | 41772-0484 | A-41772-0484 | 26-60-3061 | A-41772-0040 |
| 7 | 26-60-3070 | A-41772-0007 | 41772-0468 | A-41772-0468 | 41772-0485 | A-41772-0485 | 26-60-3071 | A-41772-0041 |
| 8 | 26-60-3080 | A-41772-0008 | 41772-0469 | A-41772-0469 | 41772-0486 | A-41772-0486 | 26-60-3081 | A-41772-0042 |
| 9 | 26-60-3090 | A-41772-0009 | 41772-0470 | A-41772-0470 | 41772-0487 | A-41772-0487 | 26-60-3091 | A-41772-0043 |
| 10 | 26-60-3100 | A-41772-0010 | 41772-0471 | A-41772-0471 | 41772-0488 | A-41772-0488 | 26-60-3101 | A-41772-0044 |
| 11 | 26-60-3110 | A-41772-0011 | 41772-0472 | A-41772-0472 | 41772-0489 | A-41772-0489 | 26-60-3111 | A-41772-0045 |
| 12 | 26-60-3120 | A-41772-0012 | 41772-0473 | A-41772-0473 | 41772-0490 | A-41772-0490 | 26-60-3121 | A-41772-0046 |
| 13 | 26-60-3130 | A-41772-0013 | 41772-0474 | A-41772-0474 | 41772-0491 | A-41772-0491 | 26-60-3131 | A-41772-0047 |
| 14 | 26-60-3140 | A-41772-0014 | 41772-0475 | A-41772-0475 | 41772-0492 | A-41772-0492 | 26-60-3141 | A-41772-0048 |
| 15 | 26-60-3150 | A-41772-0015 | 41772-0476 | A-41772-0476 | 41772-0493 | A-41772-0493 | 26-60-3151 | A-41772-0049 |
| 16 | 26-60-3160 | A-41772-0016 | 41772-0477 | A-41772-0477 | 41772-0494 | A-41772-0494 | 26-60-3161 | A-41772-0050 |
| 17 | 26-60-3170 | A-41772-0017 | 41772-0478 | A-41772-0478 | 41772-0495 | A-41772-0495 | 26-60-3171 | A-41772-0051 |
| 18 | 26-60-3180 | A-41772-0018 | 41772-0479 | A-41772-0479 | 41772-0496 | A-41772-0496 | 26-60-3181 | A-41772-0052 |

| | | | |
|---------------------------------------|---|--|---|
| REV: L6 | ECR/ECN INFORMATION: EC No.: UCP2010-0165 DATE: 8/24/2009 | TITLE: KK 156 HEADER ASSEMBLY FLAT RIGHT ANGLE SOLID BODY W/O PEGS | SHEET No. - 2 - |
| DOCUMENT NUMBER: SDA- 41772 | CREATED / REVISED BY: MKIPPER | CHECKED BY: JBELL | APPROVED BY: FSMITH www.DataSheet4U.com |

| OPTIONS | Group | A-41772-0497/0513 | Group | A-41772-0514/0530 | Group | A-41772-0019/0035 | Group | A-41772-0070/0086 |
|---------|--------------|-------------------|--------------|-------------------|--------------|-------------------|--------------|-------------------|
| | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 |
| | Pin No: | 43294-0524 | Pin No: | 43294-0525 | Pin No: | 2161-16(501) | Pin No: | 2161-21(102) |
| | Plating: | 208 – 15 GOLD | Plating: | 228 – 30 GOLD | Plating: | 501 – GOLD | Plating: | 102-TIN |
| | Pin Length L | 26.92/ 1.060 | Pin Length L | 26.92/ 1.060 | Pin Length L | 25.40/ 1.000 | Pin Length L | 28.58 / 1.125 |
| | Mating M | 16.51 / .650 | Mating M | 16.51 / .650 | Mating M | 14.86 / .585 | Mating M | 17.60/ .693 |
| | Gold Loc G | 8.77/ .345 | Gold Loc G | 8.77/ .345 | Gold Loc G | OVERALL | Gold Loc G | N/A |
| | Height Y | 4.95 / .195 | Height Y | 4.95 / .195 | Height Y | 4.95 / .195 | Height Y | 4.98/ .196 |
| | PC Tail P | 3.43 / .135 | PC Tail P | 3.43 / .135 | PC Tail P | 3.56 / .140 | PC Tail P | 3.96/ .156 |
| | Tin Loc T | 5.08/ .200 | Tin Loc T | 5.08/ .200 | Tin Loc T | N/A | Tin Loc T | OVERALL |
| | Voided Ckts | NONE | Voided Ckts | NONE | Voided Ckts | NONE | Voided Ckts | NONE |
| | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 |
| Ckts | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number |
| 2 | 41772-0497 | A-41772-0497 | 41772-0514 | A-41772-0514 | 26-61-3020 | A-41772-0019 | 26-60-3026 | A-41772-0070 |
| 3 | 41772-0498 | A-41772-0498 | 41772-0515 | A-41772-0515 | 26-61-3030 | A-41772-0020 | 26-60-3036 | A-41772-0071 |
| 4 | 41772-0499 | A-41772-0499 | 41772-0516 | A-41772-0516 | 26-61-3040 | A-41772-0021 | 26-60-3046 | A-41772-0072 |
| 5 | 41772-0500 | A-41772-0500 | 41772-0517 | A-41772-0517 | 26-61-3050 | A-41772-0022 | 26-60-3056 | A-41772-0073 |
| 6 | 41772-0501 | A-41772-0501 | 41772-0518 | A-41772-0518 | 26-61-3060 | A-41772-0023 | 26-60-3066 | A-41772-0074 |
| 7 | 41772-0502 | A-41772-0502 | 41772-0519 | A-41772-0519 | 26-61-3070 | A-41772-0024 | 26-60-3076 | A-41772-0075 |
| 8 | 41772-0503 | A-41772-0503 | 41772-0520 | A-41772-0520 | 26-61-3080 | A-41772-0025 | 26-60-3086 | A-41772-0076 |
| 9 | 41772-0504 | A-41772-0504 | 41772-0521 | A-41772-0521 | 26-61-3090 | A-41772-0026 | 26-60-3096 | A-41772-0077 |
| 10 | 41772-0505 | A-41772-0505 | 41772-0522 | A-41772-0522 | 26-61-3100 | A-41772-0027 | 26-60-3106 | A-41772-0078 |
| 11 | 41772-0506 | A-41772-0506 | 41772-0523 | A-41772-0523 | 26-61-3110 | A-41772-0028 | 26-60-3116 | A-41772-0079 |
| 12 | 41772-0507 | A-41772-0507 | 41772-0524 | A-41772-0524 | 26-61-3120 | A-41772-0029 | 26-60-3126 | A-41772-0080 |
| 13 | 41772-0508 | A-41772-0508 | 41772-0525 | A-41772-0525 | 26-61-3130 | A-41772-0030 | 26-60-3136 | A-41772-0081 |
| 14 | 41772-0509 | A-41772-0509 | 41772-0526 | A-41772-0526 | 26-61-3140 | A-41772-0031 | 26-60-3146 | A-41772-0082 |
| 15 | 41772-0510 | A-41772-0510 | 41772-0527 | A-41772-0527 | 26-61-3150 | A-41772-0032 | 26-60-3156 | A-41772-0083 |
| 16 | 41772-0511 | A-41772-0511 | 41772-0528 | A-41772-0528 | 26-61-3160 | A-41772-0033 | 26-60-3166 | A-41772-0084 |
| 17 | 41772-0512 | A-41772-0512 | 41772-0529 | A-41772-0529 | 26-61-3170 | A-41772-0034 | 26-60-3176 | A-41772-0085 |
| 18 | 41772-0513 | A-41772-0513 | 41772-0530 | A-41772-0530 | 26-61-3180 | A-41772-0035 | 26-60-3186 | A-41772-0086 |

| | | | |
|---------------------------------------|---|--|---|
| REV: L6 | ECR/ECN INFORMATION: EC No.: UCP2010-0165 DATE: 8/24/2009 | TITLE: KK 156 HEADER ASSEMBLY FLAT RIGHT ANGLE SOLID BODY W/O PEGS | SHEET No. - 3 - |
| DOCUMENT NUMBER: SDA- 41772 | CREATED / REVISED BY: MKIPPER | CHECKED BY: JBELL | APPROVED BY: FSMITH www.DataSheet4U.com |

| | | | | | | | | |
|---------|--------------|-------------------|--------------|-----------------|--------------|-----------------|--------------|-------------------|
| OPTIONS | Group | A-41772-0155/0171 | Group | | Group | | Group | A-41772-0206/0222 |
| | Header No: | 41770-0002/0018 | Header No: | | Header No: | | Header No: | 41770-0002/0018 |
| | Pin No: | 2161-16(102) | Pin No: | | Pin No: | | Pin No: | 2161-19(102) |
| | Plating: | 102-TIN | Plating: | | Plating: | | Plating: | 102-TIN |
| | Pin Length L | 25.40/ 1.000 | Pin Length L | | Pin Length L | | Pin Length L | 26.13/ 1.032 |
| | Mating M | 14.86/ .585 | Mating M | | Mating M | | Mating M | 14.86/ .585 |
| | Gold Loc G | N/A | Gold Loc G | | Gold Loc G | | Gold Loc G | N/A |
| | Height Y | 4.95/ .195 | Height Y | | Height Y | | Height Y | 4.95/ .195 |
| | PC Tail P | 3.56/ .140 | PC Tail P | | PC Tail P | | PC Tail P | 4.37/ .172 |
| | Tin Loc T | OVERALL | Tin Loc T | | Tin Loc T | | Tin Loc T | OVERALL |
| | Voided Ckts | CKT 2 | Voided Ckts | | Voided Ckts | | Voided Ckts | NONE |
| | Pack Per | PK-41772-002 | Pack Per | | Pack Per | | Pack Per | PK-41772-002 |
| Ckts | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number |
| 2 | 26-62-3024 | A-41772-0155 | | | | | | A-41772-0206 |
| 3 | 26-62-3034 | A-41772-0156 | | | | | | A-41772-0207 |
| 4 | 26-62-3044 | A-41772-0157 | | | | | | A-41772-0208 |
| 5 | 26-62-3054 | A-41772-0158 | | | | | | A-41772-0209 |
| 6 | 26-62-3064 | A-41772-0159 | | | | | | A-41772-0210 |
| 7 | 26-62-3074 | A-41772-0160 | | | | | | A-41772-0211 |
| 8 | 26-62-3084 | A-41772-0161 | | | | | 26-60-3082 | A-41772-0212 |
| 9 | 26-62-3094 | A-41772-0162 | | | | | | A-41772-0213 |
| 10 | 26-62-3104 | A-41772-0163 | | | | | | A-41772-0214 |
| 11 | 26-62-3114 | A-41772-0164 | | | | | | A-41772-0215 |
| 12 | 26-62-3124 | A-41772-0165 | | | | | 26-60-3122 | A-41772-0216 |
| 13 | 26-62-3134 | A-41772-0166 | | | | | | A-41772-0217 |
| 14 | 26-62-3144 | A-41772-0167 | | | | | 26-60-3142 | A-41772-0218 |
| 15 | 26-62-3154 | A-41772-0168 | | | | | | A-41772-0219 |
| 16 | 26-62-3164 | A-41772-0169 | | | | | | A-41772-0220 |
| 17 | 26-62-3174 | A-41772-0170 | | | | | | A-41772-0221 |
| 18 | 26-62-3184 | A-41772-0171 | | | | | | A-41772-0222 |

| | | | |
|---------------------------------------|---|--|---|
| REV: L6 | ECR/ECN INFORMATION: EC No.: UCP2010-0165 DATE: 8/24/2009 | TITLE: KK 156 HEADER ASSEMBLY FLAT RIGHT ANGLE SOLID BODY W/O PEGS | SHEET No. - 4 - |
| DOCUMENT NUMBER: SDA- 41772 | CREATED / REVISED BY: MKIPPER | CHECKED BY: JBELL | APPROVED BY: FSMITH www.DataSheet4U.com |

| | | | | | | | | |
|---------|--------------------|-------------------|--------------------|--------------------|--------------|-------------------|--------------|-------------------|
| OPTIONS | Group | A-41772-0291/0307 | Group | A-41772-0308/ 0324 | Group | A-41772-0325/0340 | Group | A-41772-0341/0352 |
| | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 | Header No: | 41770-0003/0018 | Header No: | 41770-0007/0018 |
| | Pin No: | 2161-62(102) | Pin No: | 2161-75(102) | Pin No: | 2161-16(102) | Pin No: | 2161-16(102) |
| | Plating: | 102-TIN | Plating: | 102-TIN | Plating: | 102-TIN | Plating: | 102-TIN |
| | Pin Length L | 24.89/ .980 | Pin Length L | 16.94/ .667 | Pin Length L | 25.40/ 1.000 | Pin Length L | 25.40/ 1.000 |
| | Mating M | 13.54/ .533 | Mating M | 5.87/ .231 | Mating M | 14.86/ .585 | Mating M | 14.86/ .585 |
| | Gold Loc G | N/A | Gold Loc G | N/A | Gold Loc G | N/A | Gold Loc G | N/A |
| | Height Y | 4.93/ .194 | Height Y | 4.90/ .193 | Height Y | 4.95/ .195 | Height Y | 4.95/ .195 |
| | PC Tail P | 3.86/ .152 | PC Tail P | 3.61/ .142 | PC Tail P | 3.56/ .140 | PC Tail P | 3.56/ .140 |
| | Tin Loc T | OVERALL | Tin Loc T | OVERALL | Tin Loc T | OVERALL | Tin Loc T | OVERALL |
| | PIN BEND R. | .045 R | PIN BEND R. | .045 R | Voided Ckts | CKT 3 | Voided Ckts | CKT 7 |
| | Pack Per | PK-41772-002 | Pack Per | PK-41772-001 | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 |
| Ckts | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number |
| 2 | | A-41772-0291 | 26-60-3028 | A-41772-0308 | | | | |
| 3 | | A-41772-0292 | 26-60-3038 | A-41772-0309 | | A-41772-0325 | | |
| 4 | 26-60-3047 | A-41772-0293 | 26-60-3048 | A-41772-0310 | | A-41772-0326 | | |
| 5 | 26-60-3057 | A-41772-0294 | 26-60-3058 | A-41772-0311 | | A-41772-0327 | | |
| 6 | 26-60-3067 | A-41772-0295 | 26-60-3068 | A-41772-0312 | 26-62-3061 | A-41772-0328 | | |
| 7 | 26-60-3077 | A-41772-0296 | 26-60-3078 | A-41772-0313 | | A-41772-0329 | | A-41772-0341 |
| 8 | | A-41772-0297 | 26-60-3088 | A-41772-0314 | 26-62-3081 | A-41772-0330 | 26-62-3082 | A-41772-0342 |
| 9 | 26-60-3097 | A-41772-0298 | 26-60-3098 | A-41772-0315 | | A-41772-0331 | | A-41772-0343 |
| 10 | | A-41772-0299 | 26-60-3108 | A-41772-0316 | | A-41772-0332 | | A-41772-0344 |
| 11 | | A-41772-0300 | 26-60-3118 | A-41772-0317 | | A-41772-0333 | | A-41772-0345 |
| 12 | 26-60-3127 | A-41772-0301 | 26-60-3128 | A-41772-0318 | | A-41772-0334 | | A-41772-0346 |
| 13 | | A-41772-0302 | 26-60-3138 | A-41772-0319 | | A-41772-0335 | | A-41772-0347 |
| 14 | | A-41772-0303 | 26-60-3148 | A-41772-0320 | | A-41772-0336 | | A-41772-0348 |
| 15 | | A-41772-0304 | 26-60-3158 | A-41772-0321 | | A-41772-0337 | 26-62-3152 | A-41772-0349 |
| 16 | | A-41772-0305 | 26-60-3168 | A-41772-0322 | | A-41772-0338 | | A-41772-0350 |
| 17 | | A-41772-0306 | 26-60-3178 | A-41772-0323 | | A-41772-0339 | | A-41772-0351 |
| 18 | | A-41772-0307 | 26-60-3188 | A-41772-0324 | | A-41772-0340 | | A-41772-0352 |

| | | | |
|---------------------------------------|---|--|---|
| REV: L6 | ECR/ECN INFORMATION: EC No.: UCP2010-0165 DATE: 8/24/2009 | TITLE: KK 156 HEADER ASSEMBLY FLAT RIGHT ANGLE SOLID BODY W/O PEGS | SHEET No. - 5 - |
| DOCUMENT NUMBER: SDA- 41772 | CREATED / REVISED BY: MKIPPER | CHECKED BY: JBELL | APPROVED BY: FSMITH www.DataSheet4U.com |

| | | | | | | | | |
|---------|--------------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|-------------------|
| OPTIONS | Group | A-41772-0353/0367 | Group | A-41772-0378/0394 | Group | A-41772-0412/0428 | Group | A-41772-0429/0445 |
| | Header No: | 41770-0004/0018 | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 | Header No: | 41770-0002/0018 |
| | Pin No: | 2161-16(102) | Pin No: | 2161-56(102) | Pin No: | 2161-63(102) | Pin No: | 2161-67(102) |
| | Plating: | 102-TIN | Plating: | 102-TIN | Plating: | 102-TIN | Plating: | 102-TIN |
| | Pin Length L | 25.40/ 1.000 | Pin Length L | 17.86/ .703 | Pin Length L | 24.38/ .960 | Pin Length L | 18.69/ .736 |
| | Mating M | 14.86/ .585 | Mating M | 5.94/ .234 | Mating M | 15.06/ .593 | Mating M | 10.48/ .413 |
| | Gold Loc G | N/A | Gold Loc G | N/A | Gold Loc G | N/A | Gold Loc G | N/A |
| | Height Y | 4.95/ .195 | Height Y | 4.90/ .193 | Height Y | 2.71/ .107 | Height Y | 2.71/ .107 |
| | PC Tail P | 3.56/ .140 | PC Tail P | 4.45/ .175 | PC Tail P | 4.06/ .160 | PC Tail P | 2.92/ .115 |
| | Tin Loc T | OVERALL | Tin Loc T | OVERALL | Tin Loc T | OVERALL | Tin Loc T | OVERALL |
| | Voided Ckts | CKT 4 | PIN BEND R. | .045 R | PIN BEND R. | .045 R | PIN BEND R. | .045 R |
| | Pack Per | PK-41772-002 | Pack Per | PK-41772-001 | Pack Per | PK-41772-001 | Pack Per | PK-41772-001 |
| Ckts | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number |
| 2 | | | 26-60-3029 | A-41772-0378 | 27-60-3020 | A-41772-0412 | | A-41772-0429 |
| 3 | | | 26-60-3039 | A-41772-0379 | | A-41772-0413 | | A-41772-0430 |
| 4 | | A-41772-0353 | 26-60-3049 | A-41772-0380 | | A-41772-0414 | | A-41772-0431 |
| 5 | | A-41772-0354 | 26-60-3059 | A-41772-0381 | | A-41772-0415 | | A-41772-0432 |
| 6 | | A-41772-0355 | 26-60-3069 | A-41772-0382 | | A-41772-0416 | 27-60-3061 | A-41772-0433 |
| 7 | | A-41772-0356 | 26-60-3079 | A-41772-0383 | 27-60-3070 | A-41772-0417 | 27-60-3071 | A-41772-0434 |
| 8 | 26-62-3083 | A-41772-0357 | 26-60-3089 | A-41772-0384 | | A-41772-0418 | | A-41772-0435 |
| 9 | | A-41772-0358 | 26-60-3099 | A-41772-0385 | | A-41772-0419 | | A-41772-0436 |
| 10 | | A-41772-0359 | 26-60-3109 | A-41772-0386 | | A-41772-0420 | | A-41772-0437 |
| 11 | | A-41772-0360 | 26-60-3119 | A-41772-0387 | | A-41772-0421 | | A-41772-0438 |
| 12 | 26-62-3123 | A-41772-0361 | 26-60-3129 | A-41772-0388 | | A-41772-0422 | | A-41772-0439 |
| 13 | | A-41772-0362 | 26-60-3139 | A-41772-0389 | | A-41772-0423 | | A-41772-0440 |
| 14 | | A-41772-0363 | 26-60-3149 | A-41772-0390 | | A-41772-0424 | | A-41772-0441 |
| 15 | | A-41772-0364 | 26-60-3159 | A-41772-0391 | | A-41772-0425 | | A-41772-0442 |
| 16 | | A-41772-0365 | 26-60-3169 | A-41772-0392 | | A-41772-0426 | | A-41772-0443 |
| 17 | | A-41772-0366 | 26-60-3179 | A-41772-0393 | | A-41772-0427 | | A-41772-0444 |
| 18 | | A-41772-0367 | 26-60-3189 | A-41772-0394 | | A-41772-0428 | | A-41772-0445 |

| | | | |
|---------------------------------------|---|--|---|
| REV: L6 | ECR/ECN INFORMATION: EC No.: UCP2010-0165 DATE: 8/24/2009 | TITLE: KK 156 HEADER ASSEMBLY FLAT RIGHT ANGLE SOLID BODY W/O PEGS | SHEET No. - 6 - |
| DOCUMENT NUMBER: SDA- 41772 | CREATED / REVISED BY: MKIPPER | CHECKED BY: JBELL | APPROVED BY: FSMITH www.DataSheet4U.com |

| OPTIONS | Group | A-41772-0446/0462 | Group | A-41772-0548/0560 | Group | A-41772-0561/0573 | Group | A-41772-0605/0621 |
|---------|--------------|-------------------|--------------|-------------------|--------------|-------------------|--------------|-------------------|
| | Header No: | 41770-0002/0018 | Header No: | 41770-0006/0018 | Header No: | 41770-0006/0018 | Header No: | 41770-0002/0018 |
| | Pin No: | 2161-21(501) | Pin No: | 2161-16(102) | Pin No: | 2161-52(102) | Pin No: | 2161-64(503) |
| | Plating: | 501-GOLD | Plating: | 102-TIN | Plating: | 102-TIN | Plating: | 503-GOLD |
| | Pin Length L | 28.57/1.125 | Pin Length L | 25.40/ 1.000 | Pin Length L | 27.00/ 1.063 | Pin Length L | 29.85 / 1.175 |
| | Mating M | 17.60/.693 | Mating M | 14.86/ .585 | Mating M | 16.51/ .650 | Mating M | 15.19 / .598 |
| | Gold Loc G | OVERALL | Gold Loc G | N/A | Gold Loc G | N/A | Gold Loc G | OVERALL |
| | Height Y | 4.95/ .195 | Height Y | 4.95/ .195 | Height Y | 4.95/ .195 | Height Y | 9.25 / .364 |
| | PC Tail P | 3.99/ .157 | PC Tail P | 3.56/ .140 | PC Tail P | 3.51/ .138 | PC Tail P | 3.38 / .133 |
| | Tin Loc T | N/A | Tin Loc T | OVERALL | Tin Loc T | OVERALL | Tin Loc T | NA |
| | Voided Ckts | NONE | Voided Ckts | CKTS 2, 4, 6 | Voided Ckts. | CKTS 2, 4, 6 | Voided Ckts. | NONE |
| | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 | Pack Per | PK-41772-002 |
| Ckts | Material No | Engineer Number | Item No | | Item No | | Material No | Engineer Number |
| 2 | 27-60-3022 | A-41772-0446 | | | | | | 41772-0605 |
| 3 | 27-60-3032 | A-41772-0447 | | | | | 417720606 | 41772-0606 |
| 4 | 27-60-3042 | A-41772-0448 | | | | | | 41772-0607 |
| 5 | 27-60-3052 | A-41772-0449 | | | | | | 41772-0608 |
| 6 | 27-60-3062 | A-41772-0450 | 41772-0548 | | 41772-0561 | | | 41772-0609 |
| 7 | 27-60-3072 | A-41772-0451 | 41772-0549 | | 41772-0562 | | | 41772-0610 |
| 8 | 27-60-3082 | A-41772-0452 | 41772-0550 | | 41772-0563 | | | 41772-0611 |
| 9 | 27-60-3092 | A-41772-0453 | 41772-0551 | | 41772-0564 | | | 41772-0612 |
| 10 | 27-60-3102 | A-41772-0454 | 41772-0552 | | 41772-0565 | | | 41772-0613 |
| 11 | 27-60-3112 | A-41772-0455 | 41772-0553 | | 41772-0566 | | | 41772-0614 |
| 12 | 27-60-3122 | A-41772-0456 | 41772-0554 | | 41772-0567 | | | 41772-0615 |
| 13 | 27-60-3132 | A-41772-0457 | 41772-0555 | | 41772-0568 | | | 41772-0616 |
| 14 | 27-60-3142 | A-41772-0458 | 41772-0556 | | 41772-0569 | | | 41772-0617 |
| 15 | 27-60-3152 | A-41772-0459 | 41772-0557 | | 41772-0570 | | | 41772-0618 |
| 16 | 27-60-3162 | A-41772-0460 | 41772-0558 | | 41772-0571 | | | 41772-0619 |
| 17 | 27-60-3172 | A-41772-0461 | 41772-0559 | | 41772-0572 | | | 41772-0620 |
| 18 | 27-60-3182 | A-41772-0462 | 41772-0560 | | 41772-0573 | | | 41772-0621 |

| | | | | | | | |
|--|-----------|-----------------------|-----------------------------|--------------|--|--------------|--------------|
| REV: | L6 | ECR/ECN INFORMATION: | EC No.: UCP2010-0165 | TITLE: | KK 156 HEADER ASSEMBLY FLAT RIGHT ANGLE SOLID BODY W/O PEGS | SHEET No. | - 7 - |
| | | DATE: | 8/24/2009 | | | | |
| DOCUMENT NUMBER: | | CREATED / REVISED BY: | | CHECKED BY: | | APPROVED BY: | |
| SDA- 41772 | | MKIPPER | | JBELL | | | |
| <small>FSMITH www.DataSheet4U.com TEMPLATE FILENAME: PRODUCT_SPEC (SIZE_A)(V.1). DOC</small> | | | | | | | |

| | | | | | | | | |
|---------|--------------|-----------------|--------------|-----------------|--------------|-----------------|--------------|-----------------|
| OPTIONS | Group | 41772-0622/0631 | Group | 41772-0632/0647 | Group | 41772-0648/0657 | Group | 41772-0663 |
| | Header No: | 41770-0009/0018 | Header No: | 41770-0003/0018 | Header No: | 41770-0009/0018 | Header No: | 41770-0004 |
| | Pin No: | 2161-70(102) | Pin No: | 2161-24(102) | Pin No: | 2161-45(102) | Pin No: | 2161-45(154) |
| | Plating: | 102 – TIN | Plating: | 102 – TIN | Plating: | 102 – TIN | Plating: | 154 – TIN |
| | Pin Length L | 23.24 / .915 | Pin Length L | 20.32 / .800 | Pin Length L | 20.85 / .821 | Pin Length L | 20.85 / .821 |
| | Mating M | 13.08 / .515 | Mating M | 13.08 / .515 | Mating M | 13.08 / .515 | Mating M | 10.16 / .400 |
| | Gold Loc G | N/A | Gold Loc G | N/A | Gold Loc G | N/A | Gold Loc G | N/A |
| | Height Y | 4.95 / .195 | Height Y | 1.98 / .078 | Height Y | 2.54 / .100 | Height Y | 4.95 / .195 |
| | PC Tail P | 3.18 / .125 | PC Tail P | 3.18 / .125 | PC Tail P | 3.18 / .125 | PC Tail P | 3.71 / .146 |
| | Tin Loc T | OVERALL | Tin Loc T | OVERALL | Tin Loc T | OVERALL | Tin Loc T | OVERALL |
| | Voided Ckts | 5, 8, 9 | Voided Ckts | 3 | Voided Ckts | 5, 8, 9 | Voided Ckts | NONE |
| | Pack Per | PK-41772-001 | Pack Per | PK-41772-001 | Pack Per | PK-41772-001 | Pack Per | PK-41772-001 |
| Ckts | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number | Material No | Engineer Number |
| 2 | | | | | | | | |
| 3 | | | | 41772-0632 | | | | |
| 4 | | | | 41772-0633 | | | 41772-0663 | 41772-0663 |
| 5 | | | | 41772-0634 | | | | |
| 6 | | | | 41772-0635 | | | | |
| 7 | | | 41772-0636 | 41772-0636 | | | | |
| 8 | | | | 41772-0637 | | | | |
| 9 | | 41772-0622 | | 41772-0638 | | 41772-0648 | | |
| 10 | | 41772-0623 | | 41772-0639 | | 41772-0649 | | |
| 11 | | 41772-0624 | | 41772-0640 | | 41772-0650 | | |
| 12 | | 41772-0625 | | 41772-0641 | | 41772-0651 | | |
| 13 | | 41772-0626 | | 41772-0642 | | 41772-0652 | | |
| 14 | 41772-0627 | 41772-0627 | | 41772-0643 | 41772-0653 | 41772-0653 | | |
| 15 | | 41772-0628 | | 41772-0644 | | 41772-0654 | | |
| 16 | | 41772-0629 | | 41772-0645 | | 41772-0655 | | |
| 17 | | 41772-0630 | | 41772-0646 | | 41772-0656 | | |
| 18 | | 41772-0631 | | 41772-0647 | | 41772-0657 | | |

| | | | |
|---------------------------------------|---|--|---|
| REV: L6 | ECR/ECN INFORMATION: EC No.: UCP2010-0165 DATE: 8/24/2009 | TITLE: KK 156 HEADER ASSEMBLY FLAT RIGHT ANGLE SOLID BODY W/O PEGS | SHEET No. - 8 - |
| DOCUMENT NUMBER: SDA- 41772 | CREATED / REVISED BY: MKIPPER | CHECKED BY: JBELL | APPROVED BY: FSMITH www.DataSheet4U.com |