


WORLDWIDE



2900A Series Non-Relampable Neon Light

DESCRIPTION AND FEATURES

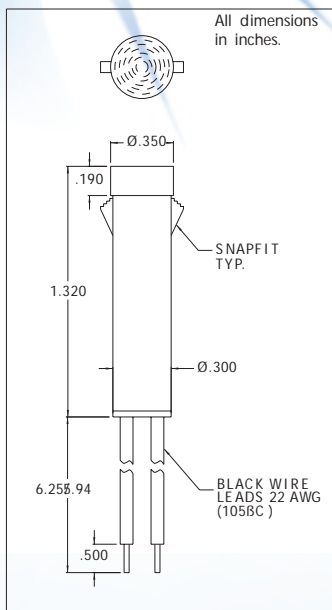

Mounting: $\phi .310$ MIN. hole in panels .020/.062 thick, use speednut #SN1287 for other panel thickness.

Wire Leads: No.22AWG (105°C), 6"long, stripped 1/2"

Lens: Tinted Transparent Polycarbonate

Lens Color	Neon
	Model No. (105-125VAC)
Red	2900A1
Clear	2900A2
Amber	2900A3
Yellow	2900A7
Lamp used	A9A+ Resistor

Underwriters Laboratories (UL) File No. E20325
Canadian Standards Association (CSA) File No. LR13346



America:
CML Innovative Technologies, Inc.
147 Central Avenue
Hackensack, NJ 07601 -USA
Tel: 1-201-489-8989
Fax: 1-201-489-6911
e-mail: americas@cml-it.com

Europe:
CML Technologies GmbH & Co. KG
Robert-Bunsen-Str. 1
67098 Bad Dürkheim - GERMANY
Tel: +49 (0)6322 9567-0
Fax: +49 (0)6322 9567-88
e-mail: europe@cml-it.com

Asia:
CML Innovative Technologies, Inc.
61 Aida Street
Singapore 459975
Tel: (65)9630-5003
e-mail: asia@cml-it.com