

NEC**TFT COLOR LCD MODULE
NL10276AC28-01****36 cm (14.1 type), 1024 × 788 pixels,
FULL-COLOR, MULTI-SCAN FUNCTION
INCORPORATED BACKLIGHT WITH INVERTER****DESCRIPTION**

NL10276AC28-01 is a TFT (thin film transistor) active matrix color liquid crystal display (LCD) comprising amorphous silicon TFT attached to each signal electrode, a driving circuit and a backlight. NL10276AC28-01 has a built-in backlight with inverter.


The 36cm diagonal display area contains 1024 × 788 pixels and can display full-color (more than 16 million colors simultaneously).

FEATURES

- High luminance and Low reflection
- Analog RGB signals
- Multi-scan function: e.g., XGA, SVGA, VGA, VGA-TEXT, PC-9801, MAC
- Incorporated edge-light type backlight with inverter (Two lamps)

APPLICATIONS

- Engineering workstation(EWS), Desk-top type of PC
- Display terminals for control system
- Monitors for process controller

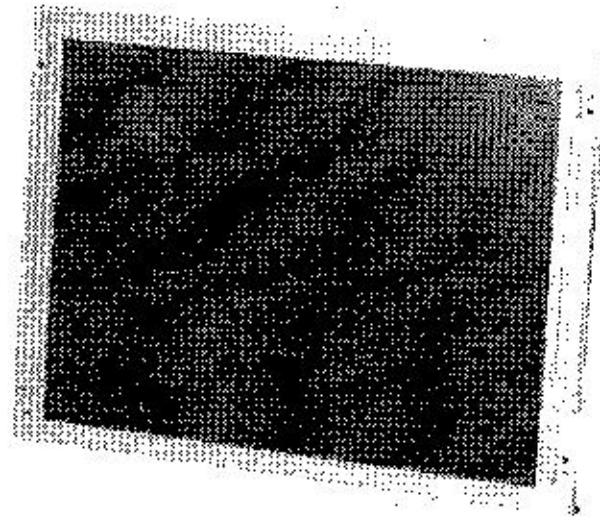

STRUCTURE AND FUNCTIONS

A color TFT (thin film transistor) LCD module is comprised of a TFT liquid crystal panel structure, LSIs for driving the TFT array, and a backlight assembly. The TFT panel structure is created by sandwiching liquid crystal material in the narrow gap between a TFT array glass substrate and a color filter glass substrate. After the driver LSIs are connected to the panel, the backlight assembly is attached to the backside of the panel.


RGB (red, green, blue) data signals from a source system is modulated into a form suitable for active matrix addressing by the onboard signal processor and sent to the driver LSIs which in turn addresses the individual TFT cells.

Acting as an electro-optical switch, each TFT cell regulates light transmission from the backlight assembly when activated by the data source. By regulating the amount of light passing through the array of red, green, and blue dots, color images are created with clarity.

OUTLINE OF CHARACTERISTICS (at room temperature)

Display area	285.696 (H) × 214.272 (V) mm
Drive system	a-Si TFT active matrix
Display colors	Full-color
Number of pixels	1024 × 768
Pixel arrangement	RGB vertical stripe
Pixel pitch	0.279 (H) × 0.279 (V) mm
Module size	330.0 (H) × 255.0 (V) × 19.0 typ. (D) mm
Weight	1220 g (typ.)
Contrast ratio	150:1 (typ.)
Viewing angle (more than the contrast ratio of 10:1)	<ul style="list-style-type: none"> • Horizontal : 50° (typ., left side, right side) • Vertical : 15° (typ., up side), 30° (typ., down side)
Designed viewing direction	<ul style="list-style-type: none"> • Wider viewing angle with contrast ratio : down side (6 o'clock) • Wider viewing angle without image reversal : up side (12 o'clock) • Optimum grayscale (γ= 2.2) : -5° (typ.)
Color gamut	35 % (min. At center, To NTSC)
Response time	40 ms (max.), "white" to "black"
Luminance	200 cd/m ² (typ.)
Signal system	Analog RGB signals, Synchronous signals (Hsync, Vsync), Dot clock (CLK)
Supply voltage	12 V, 1.2 V (Logic/LCD driving, Backlight)
Backlight	Edge light type: Two cold cathode fluorescent lamps with inverter
Power consumption	15.0 W (typ.)

BLOCK DIAGRAM

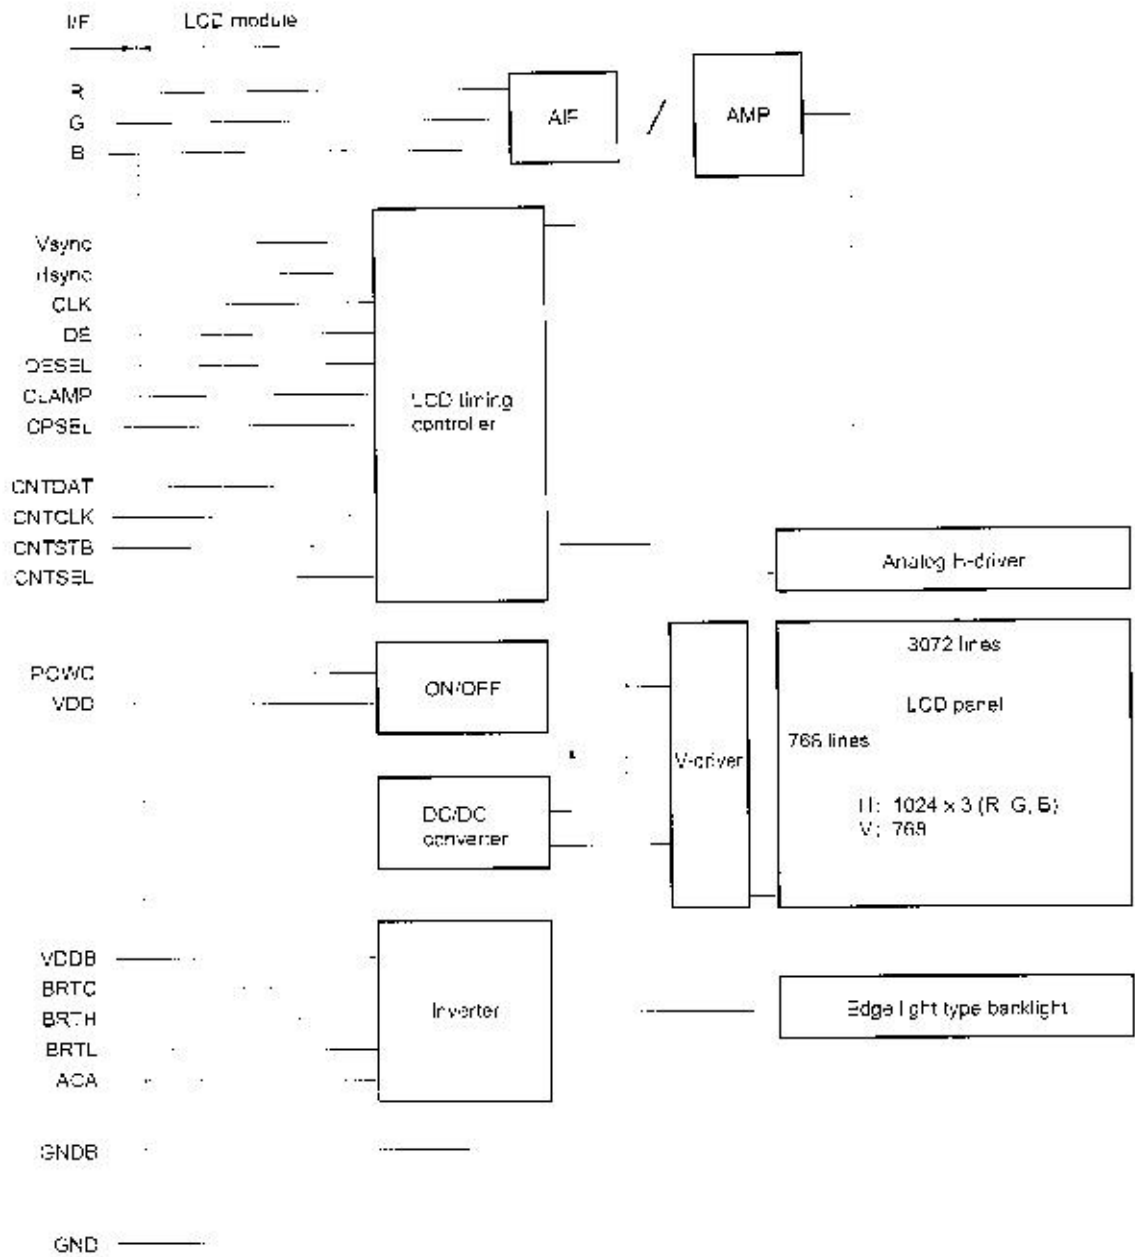

Note: Frame is not connected to GND and GNDB.

SPECIFICATIONS

GENERAL SPECIFICATIONS

Item	Contents	Unit
Module size	330.0 ± 0.5 (H) × 255.0 ± 0.5 (V) × 20.0 (max.) (D)	mm
Display area	285.696 (H) × 214.272 (V)	mm
Number of dots	1024 × 3 (H) × 768 (V)	dots
Pixel pitch	0.279 (H) × 0.279 (V)	mm
Dot pitch	0.093 (H) × 0.279 (V)	mm
Pixel arrangement	RGB (Red, Green, Blue) vertical stripe	—
Display colors	Full-color	color
Weight	1250 (max.)	g

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Range	Unit	Remarks
Supply voltage	VDD _B	-0.3 to +14	V	Ta = 25 °C
	VDD	-0.3 to +14	V	
Logic input voltage	V _{in1}	-0.3 to +6.5	V	Ta = 25 °C VDD = 12 V
R, G, B input voltage	V _{in2}	-6.0 to +6.0	V	
CLK input voltage	V _{in3}	-7.0 to +7.0	V	
SRFL input voltage	V _{in4}	-0.3 to +1.5	V	
Storage temp.	T _{st}	-20 to +60	°C	—
Operating temp.	T _{op}	0 to +50	°C	Module surface <small>Note</small>
Humidity (no condensation)	≤ 95 % relative humidity			Ta ≤ 40 °C
	≤ 85 % relative humidity			40 < Ta ≤ 50 °C
	Absolute humidity shall not exceed Ta = 50 °C 85 % relative humidity level.			Ta > 50 °C

Note Measured at the LCD panel

ELECTRICAL CHARACTERISTICS


(1) Logic, LCD driving, Backlight

(Ta = 25 °C)

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Supply voltage	V _{DDB}	11.4	12.0	12.6	V	for backlight
	V _{DD}	11.4	12.0	12.6	V	for Logic and LCD driving
Logic input "L" voltage	V _L	0	—	0.8	V	TTL level
Logic input "H" voltage	V _H	2.2	—	5.25	V	
CLK input voltage	V _{CLK}	0.6	—	1.0	V _{p-p}	for CLK
CLK DC input level	V _{DCCLK}	-4.5	—	+4.5	V	
Logic input "L" current 1	I _{L1}	-1080	—	—	μA	for CNTSEL and CPSEL for POWC
Logic input "H" current 1	I _{H1}	—	—	10	μA	
Logic input "L" current 2	I _{L2}	-280	—	—	μA	for BRTC
Logic input "H" current 2	I _{H2}	—	—	820	μA	
Logic input "L" current 3	I _{L3}	500	—	—	μA	for ACA
Logic input "H" current 3	I _{H3}	—	—	340	μA	
Logic input "L" current 4	I _{L4}	-10	—	—	μA	for except above terminals
Logic input "H" current 4	I _{H4}	—	—	130	μA	
Supply current: ^{Note}	I _{DDB}	—	710	900	mA	V _{DDB} = 12.0 V (Max. luminance)
	I _{DD}	—	530	800	mA	V _{DD} = 12.0 V

Note: Dot-checked pattern.

(2) CLK input equivalent circuit

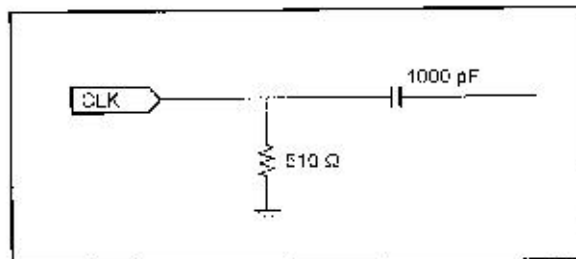


(3) Video signal (R, G, B) input

(Ta = 25 °C)

Item	Min.	Typ.	Max.	Unit	Remarks
Maximum amplitude (white - black)	0 (black)	—	0.7 (white)	V _{p-p}	—
DC input level (black)	-3.5	—	+3.5	V	—

SUPPLY VOLTAGE SEQUENCE

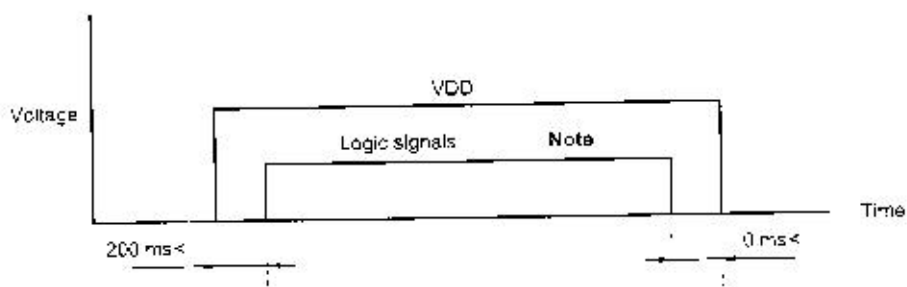

Note Synchronous signal, Control signals

CAUTION
Wrong power sequence may damage to the module.

- (1) Logic signals (synchronous signals and control signals) should be "0" voltage (V), when VDD is not input. If higher than 0.3 V is input to signal lines, the internal circuit will be damaged.
- (2) LCD module will shut down the power supply of driving voltage to LCD panel internally, when one of CLK, Hsync, Vsync, DE (at DE mode) is not input more than 90 ms typically. As the display data are unstable in this period, the display is disordered. But the backlight works correctly even in this period. So the backlight ON/OFF should be controlled by BRTC signal.
- (3) The ON/OFF switching of backlight while logic signals are supplied. The backlight power supply (VDDB) is not related to the power supply sequence. However, unstable data will be displayed when the backlight power is turned ON/OFF with no logic signals.
- (4) Keep POWC signal "L" more than 200 ms after the power supply (VDD) is input, if POWC signal is controlled.
- (5) Analog RGB input are independent from this power supply sequence.

INTERFACE PIN CONNECTION

- (1) CN1
 - Part No. : MRF03-6R-SMT
 - Adaptable socket : MRF03-2 x 6P-1.27 (For cable type) or MRF03-6PR-SMT (For board to board type)
 - Supplier : HIROSE ELECTRIC CO.,LTD. (coaxial type)

 - Coaxial cable : UL20537PF75VLAS
 - Supplier : HITACHI CO., LTD.

Note A coaxial cable shield should be connected with GND.

Pin No.	Symbol	Pin No.	Symbol
1	B	4	Vsync
2	C	5	Hsync
3	R	6	CLK

Figure from socket view



(2) CN2

Part No. : IL-Z-12PL1-SMTY
 Adaptable socket : IL-Z-12S-S125C3
 Supplier : Japan Aviation Electronics Industry Limited (JAE)

Pin No.	Symbol	Pin No.	Symbol
1	VDD	7	N.C.
2	VDD	8	N.C.
3	GND	9	DESEL
4	GND	10	GND
5	POWC	11	GND
6	GND	12 ▼	DE

Figure from socket view



(3) CN3

Part No. : IL-Z-11PL1-SMTY
 Adaptable socket : IL-Z-11S-S125C3
 Supplier : Japan Aviation Electronics Industry Limited (JAE)

Pin No.	Symbol	Pin No.	Symbol
1	VDDB	7	ACA
2	VDDB	8	BRTC
3	VDDB	9	BRTH
4	GND	10	BRTL
5	GND	11 ▼	N.C.
6	GND		

Figure from socket view



Note N.C. (No connection) should be open.

(4) CN4

Part No. : IL-Z-13PL1-SMTY
 Adaptable socket : IL-Z-13S-S125C3
 Supplier : Japan Aviation Electronics Industry Limited (JAE)

Pin No.	Symbol	Pin No.	Symbol
1	GND	8	CLAMP
2	CNTSEL	9	GND
3	CNTDAT	10	N.C.
4	CNTSTB	11	GND
5	GND	12	N.C.
6	CNTCLK	13 ▼	GND
7	CPSEL		

Figure from socket view



Note N.C. (No connection) should be open.

(5) CN5


Part No. : IL-Z-6PL-SMTY

Adaptable socket : IL-Z-6S-S1.25C3

Supplier : Japan Aviation Electronics Industry Limited (JAE)


Pin No.	Symbol	Pin No.	Symbol
1	GNDB	4	BRTC
2	GNDB	5	BRTI-
3	ACA	6	BRTL

Figure from socket view



Note CN5 should be open in case of CN3 is used.

Rear view

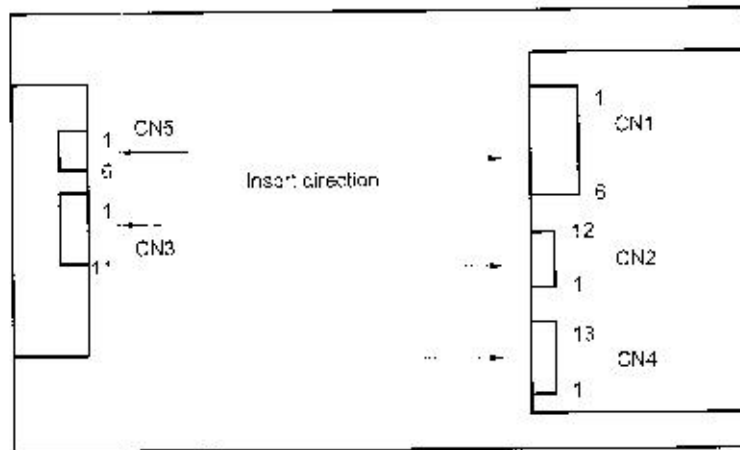


PIN FUNCTION

Symbol	I/O	Logic	Description
CLK	Input	Negative	Dot clock input. (ECL level) This timing-signal is for display data.
Hsync	Input	Negative	Horizontal synchronous signal input. (TTL level)
Vsync	Input	Negative	Vertical synchronous signal input. (TTL level)
R	Input	—	Red video signal input (0.7 Vp-p, 75 Ω)
G	Input	—	Green video signal input (0.7 Vp-p, 75 Ω)
B	Input	—	Blue video signal input (0.7 Vp-p, 75 Ω)
POWC	Input	Positive	Power control signal (TTL level) "H" or "Open": Logic and LCD power are on. "L": Logic and LCD power are off. When POWC is "L", serial communication data is clear. Please set again. Note 1
DESEL	Input	Positive	DE function select signal (TTL level) "H": DE mode, "L" or "Open": Fixed mode
DE	Input	Positive	Data enable signal input (TTL level) 1. Back-porch becomes free, when DESEL is "H" 2. Back-porch becomes fix, when DESEL is "L". Then DE should be fixed "H" or "L"
CNTSEL	Input	—	Display control signal in case of serial communications. (TTL level) "H" or "Open": Default, "L": External control Serial communications set external control up.
CNTDAT	Input	Positive	Display control data (TTL level) Detail of CNTDAT is mentioned in FUNCTIONS .
CNTCLK	Input	Positive	CLK for display control data (TTL level) Detail of CNTDAT is mentioned in FUNCTIONS .
CNTSTB	Input	Positive	Latency pulse for display control data (TTL level) Detail of CNTDAT is mentioned in FUNCTIONS
CPSEL	Input	—	Clamp signal function select signal (TTL level) "H" or "Open": Default, "L": CLAMP signal is possible.
CLAMP	Input	Negative	Clamp timing signal of black level (TTL level) This mode works in CPSEL = "L".
ACA	Input	Positive	Luminance control signal (TTL level) "H" or "Open": Normal luminance "L": Low luminance (1/2 of normal luminance)
BRTC	Input	Positive	Backlight ON/OFF control signal (TTL level) "H" or "Open": Backlight ON, "L": Backlight OFF
BRTH	Input	—	Variable resistor control (Note 2) or Voltage control (Note 3)
BRTL	Input	—	
VDD	—	—	Power supply for Logic and LCD driving. +12 V (±5%)
VDDB	—	—	Power supply for backlight. +12 V (±5%)
GND	—	—	Signal ground for Logic and LCD driving (Connect to a system ground)
GNDB	—	—	Ground for backlight. GNDB is not connected to the same ground of LCD module.

Notes 1. When POWC is "L" logic input signal is all "0 V". If input more than "0.3 V", inside circuits of the LCD module may be broken.

2. The variable resistor for luminance control should be 10 kΩ type, and zero point of the resistor correspond to the minimum of luminance.



Mating variable resistor: 10 kΩ ±5%, B curve

Maximum luminance (100%) : R = 10 kΩ
Minimum luminance (50%) : R = 0 Ω

3. If luminance is controlled by BRTH/BRTL input voltage, at first BRTH is "0 V", and BRTL input voltage controls brightness. When BRTL input voltage is "1 V" the luminance become maximum, and when BRTL input voltage is "0 V", the luminance becomes minimum.

FUNCTIONS

This LCD module has following functions by serial data input (table 1)

- (1) Expansion mode : See table 2 and **EXPANSION FUNCTION**
- (2) Display position control (VERTICAL) : See table 3
- (3) Display position control (HORIZONTAL): See table 6
- (4) CLK delay control : See table 4
- (5) CLK fall/rise synchronous change : See table 5

Set up the following items to work the above functions


- (A) CLK counts of horizontal period : See table 7
- (B) CLK frequency range : See table 8

HOW TO USE THE ABOVE FUNCTIONS

If CNTSEL is "L", the above functions are valid. (CNTSEL is "H" or open, default values are valid.) After serial data are transferred, the data is latched by CNTSTB. Once, the data is latched, the above functions are effective. Please keep CNTSTB to be "L" during transferring data. Input data can be changed during power on, but LCD display may be disturbed. When the serial data are changed, we recommend that the backlight power is off using BRTC function.

SERIAL COMMUNICATION TIMING AND WAVEFORM

SERIAL COMMUNICATION TIMING

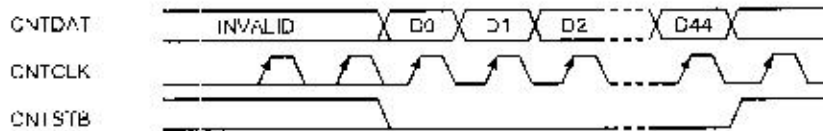

Parameter	Symbol	Min	Max	Unit	Remark
CLK pulse-width	T_{wck}	50	—	µs	CNTCLK
CLK frequency	F_{clk}	—	5	MHz	
DATA set-up-time	T_{ds}	50	—	ns	CNTDAT
DATA hold-time	T_{dhl}	50	—	ns	
Latch pulse-width	T_{wlp}	50	—	ns	CNTSTB
Latch set-up-time	T_{lst}	50	—	ns	
Rise/fall time	T_r, T_f	—	50	ns	CNTxxx

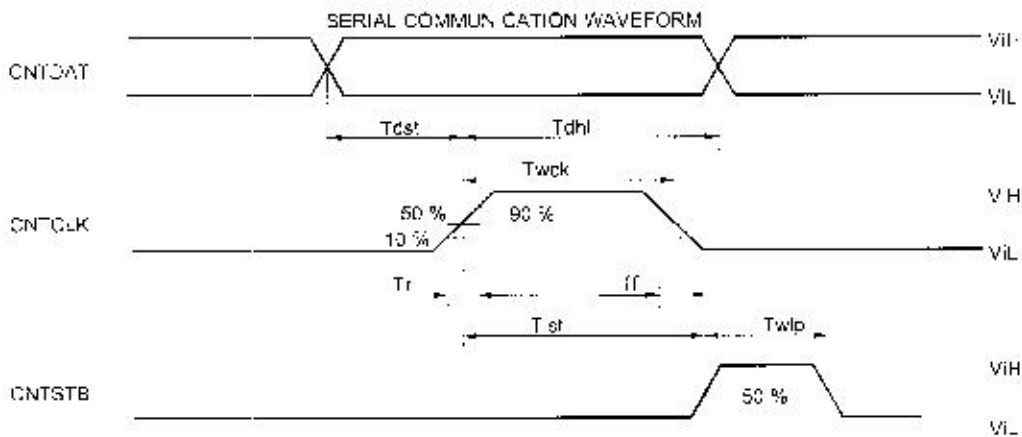


Table 1. CNTDAT Composition

DATA	DATA name	Function	
D0	VEX2	Expansion mode	See table 2
D1	VEX2	Expansion mode	
D2	VEX1	Expansion mode	
D3	VEX0	Expansion mode	
D4	VD10	Vertical display position (MSB)	See table 3
D5	VD9	Vertical display position	
D6	VD8	Vertical display position	
D7	VD7	Vertical display position	
D8	VD6	Vertical display position	
D9	VD5	Vertical display position	
D10	VD4	Vertical display position	
D11	VD3	Vertical display position	
D12	VD2	Vertical display position	
D13	VD1	Vertical display position	
D14	VD0	Vertical display position (LSB)	
D15	DELAY6	CLK delay (MSB)	See table 4
D16	DELAY5	CLK delay	
D17	DELAY4	CLK delay	
D18	DELAY3	CLK delay	
D19	DELAY2	CLK delay	
D20	DELAY1	CLK delay	
D21	DELAY0	CLK delay (LSB)	
D22	K S	LK reverse signal	See table 5
D23	D8	horizontal display position (MSB)	See table 6
D24	D7	horizontal display position	
D25	D6	horizontal display position	
D26	D5	horizontal display position	
D27	D4	horizontal display position	
D28	D3	horizontal display position	
D29	D2	horizontal display position	
D30	D1	horizontal display position	
D31	D0	horizontal display position (LSB)	
D32	SE10	LKcount of horizontal period (MSB)	
D33	SE9	LKcount of horizontal period	
D34	SE8	LKcount of horizontal period	
D35	SE7	LKcount of horizontal period	
D36	SE6	LKcount of horizontal period	
D37	SE5	LKcount of horizontal period	
D38	SE4	LKcount of horizontal period	
D39	SE3	LKcount of horizontal period	
D40	SE2	LKcount of horizontal period	
D41	SE1	LKcount of horizontal period	
D42	SE0	LKcount of horizontal period (LSB)	
D43	OD1	LK frequency select	See table 8
D44	OD0	LK frequency select	

Table 2. Display Mode (VEX3 to VEX0: 4 bit)

VEX3	VEX2	VEX1	VEX0	Vertical magnification	Display mode	Display Image
0	0	0	0	1	XGA	Standard Note
0	0	0	1	1.25	SVGA	See DISPLAY IMAGE
0	0	1	0	1.6	TEXT	
0	0	1	1	—	Prohibit	
0	1	0	1	—	Prohibit	
0	1	1	0	—	Prohibit	
0	1	1	1	—	Prohibit	
1	0	0	0	—	Prohibit	
1	0	0	1	1.2	Prohibit	
1	0	1	0	—	832 624 (MAC)	
1	0	1	1	—	Prohibit	
1	1	0	0	—	Prohibit	
1	1	0	1	—	Prohibit	
1	1	1	0	—	Prohibit	
1	1	1	1	—	Prohibit	

Note When CNTSEL is "H" or "Open", display mode is XGA.

Table 3. Vertical Position (VD10 to VD0: 11 bit)

VD10	VD9	VD8	VD7	VD6	VD5	VD4	VD3	VD2	VD1	VD0	Vertical position [H] Note 1
0	0	0	0	0	0	0	0	0	0	0	Prohibit
0	0	0	0	0	0	0	0	0	0	1	Prohibit
0	0	0	0	0	0	0	0	0	1	0	Prohibit
0	0	0	0	0	0	0	0	0	1	1	Prohibit
0	0	0	0	0	0	0	0	1	0	0	4
0	0	0	0	0	0	0	0	1	0	1	5
0	0	0	0	0	0	0	0	0	0	0	...
0	0	0	0	0	0	0	0	0	0	0	...
0	0	0	0	0	0	0	0	0	0	0	...
1	1	1	1	1	1	1	1	1	0	1	2045
1	1	1	1	1	1	1	1	1	1	0	2046
1	1	1	1	1	1	1	1	1	1	1	2047 Note 2

- Notes
1. This is horizontal line number for effective VIDEO signal from Vsync-fall.
 2. The maximum vertical position is Vsync total.
 3. When CNTSEL is "H" or "Open", vertical position is fixed at 35 [H].

Table 4. CLK Delay (DELAY6 to DELAY0: 7 bit)

DELAY[6..0]	Delay	Unit	DELAY[6..0]	Delay	Unit	DELAY[6..0]	Delay	Unit
00H	7.0	ns	30H	35.6	ns	60H	64.0	ns
01H	7.6	ns	31H	36.1	ns	61H	64.7	ns
02H	8.2	ns	32H	36.8	ns	62H	65.2	ns
03H	8.8	ns	33H	37.5	ns	63H	66.0	ns
04H	9.4	ns	34H	37.9	ns	64H	66.5	ns
05H	10.0	ns	35H	38.5	ns	65H	67.1	ns
06H	10.5	ns	36H	39.1	ns	66H	67.7	ns
07H	11.2	ns	37H	39.7	ns	67H	68.3	ns
08H	11.8	ns	38H	40.4	ns	68H	68.9	ns
09H	12.4	ns	39H	41.0	ns	69H	69.5	ns
0AH	13.0	ns	3AH	41.5	ns	6AH	70.1	ns
0BH	13.7	ns	3BH	42.1	ns	6BH	70.7	ns
0CH	14.2	ns	3CH	42.6	ns	6CH	71.2	ns
0DH	14.8	ns	3DH	43.2	ns	6DH	71.9	ns
0EH	15.3	ns	3EH	43.8	ns	6EH	72.4	ns
0FH	15.9	ns	3FH	44.4	ns	6FH	73.1	ns
10H	16.6	ns	40H	45.0	ns	70H	73.6	ns
11H	17.2	ns	41H	45.5	ns	71H	74.2	ns
12H	17.8	ns	42H	46.2	ns	72H	74.8	ns
13H	18.4	ns	43H	46.8	ns	73H	75.4	ns
14H	18.9	ns	44H	47.3	ns	74H	75.9	ns
15H	19.5	ns	45H	47.8	ns	75H	76.5	ns
16H	20.1	ns	46H	48.4	ns	76H	77.0	ns
17H	20.7	ns	47H	49.0	ns	77H	77.7	ns
18H	21.4	ns	48H	49.6	ns	78H	78.3	ns
19H	22.0	ns	49H	50.2	ns	79H	79.0	ns
1AH	22.6	ns	4AH	50.8	ns	7AH	79.6	ns
1BH	23.2	ns	4BH	51.4	ns	7BH	80.2	ns
1CH	23.8	ns	4CH	51.9	ns	7CH	80.8	ns
1DH	24.4	ns	4DH	52.6	ns	7DH	81.4	ns
1EH	24.9	ns	4EH	53.1	ns	7EH	81.9	ns
1FH	25.6	ns	4FH	53.7	ns	7FH	82.5	ns
20H	26.3	ns	50H	54.5	ns			
21H	26.9	ns	51H	55.0	ns			
22H	27.4	ns	52H	55.6	ns			
23H	28.1	ns	53H	56.3	ns			
24H	28.5	ns	54H	56.8	ns			
25H	29.1	ns	55H	57.4	ns			
26H	29.7	ns	56H	57.9	ns			
27H	30.3	ns	57H	58.5	ns			
28H	31.0	ns	58H	59.2	ns			
29H	31.6	ns	59H	59.8	ns			
2AH	32.2	ns	5AH	60.4	ns			
2BH	32.8	ns	5BH	61.1	ns			
2CH	33.3	ns	5CH	61.6	ns			
2DH	33.9	ns	5DH	62.2	ns			
2EH	33.4	ns	5EH	62.7	ns			
2FH	35.1	ns	5FH	63.3	ns			

- Notes
1. When CN^TSEL is "H" or "Open", DELAY[6..0] is fixed at 00H.
 2. This delay value is typical value at Ta = 25 °C. By changing ambient temperature and power supply, the delay will be changed.

Please set up a preferable display position. See the following references.

<1> Variation of CLK delay by temperature drift. (as reference) The temperature constant of CLK delay is 0.2 %/ °C.

Calculated example:

In case of delay time is 20 ns at Ta = 25 °C;

(a) In case Ta rising to 50 °C.

Increase of delay time (50 °C - 25 °C) × 0.002 × 20 ns = +1 ns
 So, the total delay time is 21 ns at Ta = 50 °C.



(b) In case Ta falling to 0 °C.

Decrease of delay time (0 °C - 25 °C) × 0.002 × 20 ns = -1 ns
 So, the total delay time is 19 ns at Ta = 0 °C.

<2> Variation of CLK delay time against each LCD module. (as reference)
 -10.5 % to +14.4 %

The upper limit of CLK delay; DELAY[6..0]	MOD setting			
	0, 0	0, 1	1, 0	1, 1
Prohibit	59H	6B-H	7F-	

Table 5. CLK Reverse Signal

CKS	FUNCTION
0	DATA is sampled on rising edge of CLK 
1	DATA is sampled on falling edge of CLK 

Note When CNTSEL is "H" or "Open", CKS is "0".

Table 6. Display Horizontal Position (HD8 to HD0: 9 bit)

HD8	HD7	HD6	HD5	HD4	HD3	HD2	HD1	HD0	Horizontal position [CLK] Note 1
0	0	0	0	0	0	0	0	0	Prohibit
0	0	0	0	0	0	0	0	1	Prohibit
0	0	0	0	0	0	0	0	0	64
0	0	0	0	0	0	0	0	1	65
0	0	0	0	0	0	0	1	0	508
0	0	0	0	0	0	0	1	1	510
0	0	0	0	0	0	1	0	1	509
0	0	0	0	0	0	1	1	0	511
0	0	0	0	0	0	1	1	1	511

Notes 1. This is CLK number from Hsync-fall to effecting VIDEO signal.

2. When CNTSEL is "H" or "Open", horizontal position is set at 296 [CLK].

Table 7. CLK Count of Horizontal Period (HSE10 to HSE0: 11 bit)

HSE10	HSE9	HSE8	HSE7	HSE6	HSE5	HSE4	HSE3	HSE2	HSE1	HSE0	CLK count: Note 1
0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	1	1
0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0
1	1	1	1	1	1	1	1	1	0	1	2045
1	1	1	1	1	1	1	1	1	1	0	2046
1	1	1	1	1	1	1	1	1	1	1	2047

- Notes**
1. This is CLK number from Hsync to next Hsync.
 2. When CNTSEL is "H" or "Open", CLK count is set at 1344 [CLK].
 3. This CLK count must be equal to CLK count of input signal.

Table 8. CLK Frequency Select (MOD1 to MOD0: 2 bit)

MOD1	MOD0	CLK frequency [MHz]
0	0	Prohibit
0	1	65 to 79
1	0	50 to 65
1	1	20 to 50

- Notes**
1. Set up the MOD1 and MOD0 complying with input CLK frequency.
 2. When CNTSEL is "H" or "Open", CLK frequency is set 65 to 79 MHz.

EXPANSION FUNCTION

HOW TO USE EXPANSION MODE

Expansion mode is a function to expand screen. For example, VGA signal has 640 × 480 pixels. But, if the display data can be expanded to 1.6 times vertically and horizontally, VGA screen image can be displayed fully on the screen of XGA resolution.

This LCD module has the function of expanding vertical direction as shown in Table 1. And expanding horizontal direction is possible by setting input CLK frequency which is equivalent to the magnification. It is necessary to make the CLK outside of this LCD module.

The below image is display example, when DE function is default and HD and VD is set to most suitable frequency. And when DE function is used, HD and VD become default. Adjust the display to the best position by DE signal. Please adopt this mode after evaluating display quality, because the appearance of expansion mode is happened to become bad some cases.

The followings show display magnifications for each mode.

Input display	Number of pixels	Magnification	
		Vertical	Horizontal Note
XGA	1024 768	1	1
SVGA	800 600	1.25	1.25
VGA	640 480	1.6	1.6
VGA text	720 400	1.6	1.4
PC9801	640 400	1.6	1.6
MAC	832 624	1.2	1.2

Note The horizontal magnification multiplies the input clock (CLK).

$$\text{Input CLK} = \text{system CLK} \times \text{horizontal magnification}$$

Example In case of XGA and VGA, CLK frequency can be decided as follows.

$$\text{XGA: (system CLK (65 MHz))} \quad 1.0 = 65 \text{ MHz}$$

$$\text{VGA: (system CLK (25.175 MHz))} \quad 1.6 = 40.28 \text{ MHz}$$

SETTING SERIAL DATA


Mode	Input signal				Module serial data setting						
	System CLK [MHz]	Hsync [kHz]	Vsync [Hz]	Horizontal		Vertical		-SE	HD	VD	
				Count number [CLK]	DSP* [CLK]	Count number [H]	DSP* [H]				Calculation formula
				(A)	(B)	(C)	(D)				
XGA (1024 768)	65	46.363	60.034	1344	296	806	35	(A) 1	(B) 1	= (C)	
	75	56.476	70.069	1328	280	806	35				
	76.75	60.023	75.029	1312	272	600	31				
MAC (832 624)	57.283	49.725	74.5	1152	288	667	42	(A) 1.2	(B) 1.2		
SVGA (800 600)	35*	36.166	55.25	1024	200	625	24	(A) 1.25	(B) 1.25		
	43*	27.879	50.217	1056	216	628	27				
	50*	48.077	72.189	1040	184	666	29				
	49.5*	46.876	75	1056	240	666	24				
VGA (640 480)	25.175*	31.469	55.04	800	144	525	36	(A) 1.6	(B) 1.6		
	31.5*	37.861	72.809	832	168	520	31				
	31.5*	37.5	75	840	184	500	19				
	30.24*	35.0	66.667	854	160	525	42				
VGA text (720 400)	28.322*	31.459	70.067	900	153	448	37	(A) 1.4	(B) 1.4		
	31.5*	37.927	85.04	936	180	446	45				
PC9801 (640 400)	21.053*	24.827	55.432	848	144	440	33	(A) 1.6	(B) 1.6	443	

* DSP = Display Start Period. DSP is total of "pulse-width" and "back-porch".

- Notes
1. HD and VD are approximate value. Set HD and VD in case of adjusting display to the screen center.
 2. The pulse-width of Hsync, Vsync and back-porch are the same as XGA-mode. (Standard-mode).
 3. HSE see CLK number of table 7.
 4. HD see horizontal position of table 6.
 5. VD see vertical position of table 3.

DISPLAY IMAGE


1) SVGA mode (800 600)

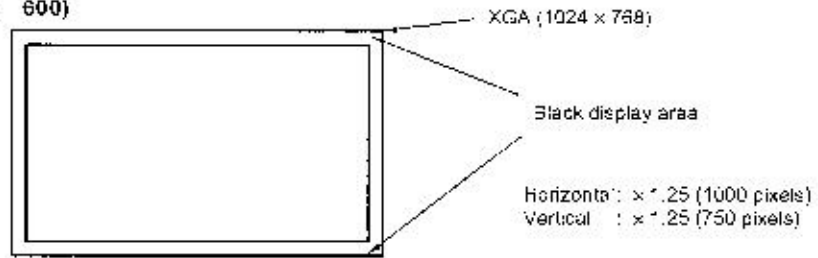


2) VGA mode (640 480)




3) PC9801 mode (640 400)

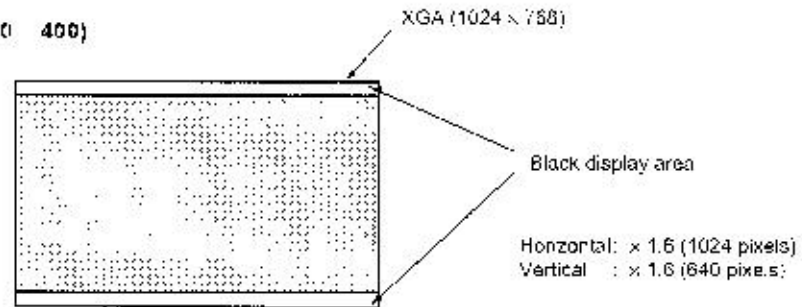

4) VGA text mode (720 400)

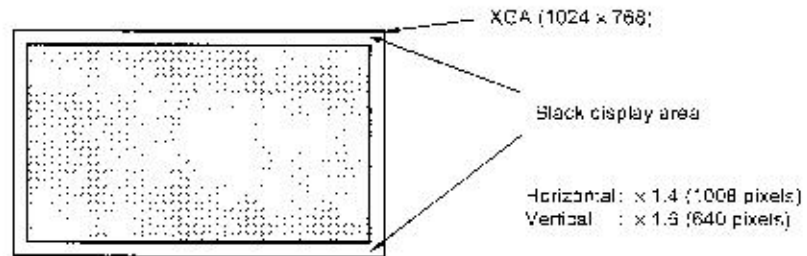

5) 832 624 MAC mode (832 624)

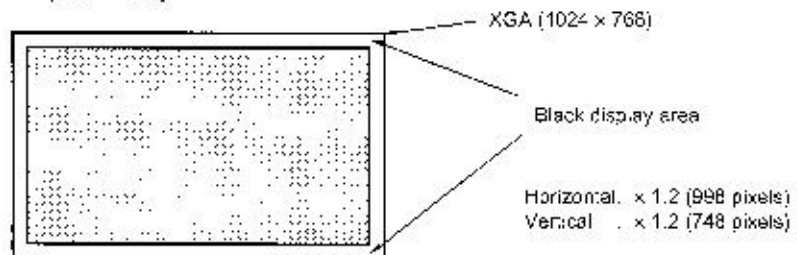


INPUT SERIAL TIMING


XGA MODE (STANDARD)

	Name	Symbol	Min.	Typ.	Max.	Unit	Remark	
CLK	Frequency	f _{clk}	52.0 —	65.0 16.385	79.0 —	MHz ns	XGA standard	
	Rise / Fall	t _{crf}	—	—	10	ns	—	
	Pulse-width	t _{clhc}	0.4	0.5	0.6	—	—	
-sync	Period	t _h	16.0 —	20.877 1344	22.7 —	μs CLK	48.363 kHz (typ.)	
	Display	t _{hd}	— —	15.754 1024	— —	μs CLK	—	
	Front-porch	t _{hf}	— 10	0.369 24	— —	μs CLK	—	
	Pulse-width	t _{hp}	— 16	2.032 136	— —	μs CLK	—	
	Back-porch	t _{hb}	1.0 44	2.462 160	— —	μs CLK	Note	
	Pulse-width - Back-porch	t _{hpb}	1.8	—	—	μs	—	
	Vsync - Hsync timing	t _{hvh}	4	—	—	ns	—	
		t _{hvs}	1	—	—	CLK	—	
	Vsync	Rise / Fall	t _{hrf}	—	—	10	ns	—
		Period	t _v	13.3 —	16.885 806	18.5 —	ms H	60.004 Hz (typ.)
Display		t _{vd}	— —	15.890 768	— —	μs H	—	
Front-porch		t _{vf}	— 1	62.031 3	— —	μs H	—	
Pulse-width		t _{vp}	— 2	24.06 6	— —	μs —	—	
Back-porch		t _{vb}	— 5	599.63 29	— —	μs —	—	
DE	Set up time	t _{ds}	2	—	—	ns	—	
	Hold time	t _{dn}	4	—	—	ns	—	
	Rise / Fall	t _{drrf}	—	—	10.0	ns	—	
Analog R, C, B	—	t _{da}	4	—	—	ns	—	

Note Minimum values of Back-porch (t_{hb}) must be satisfied with both 1.0 μs and 44 CLK.

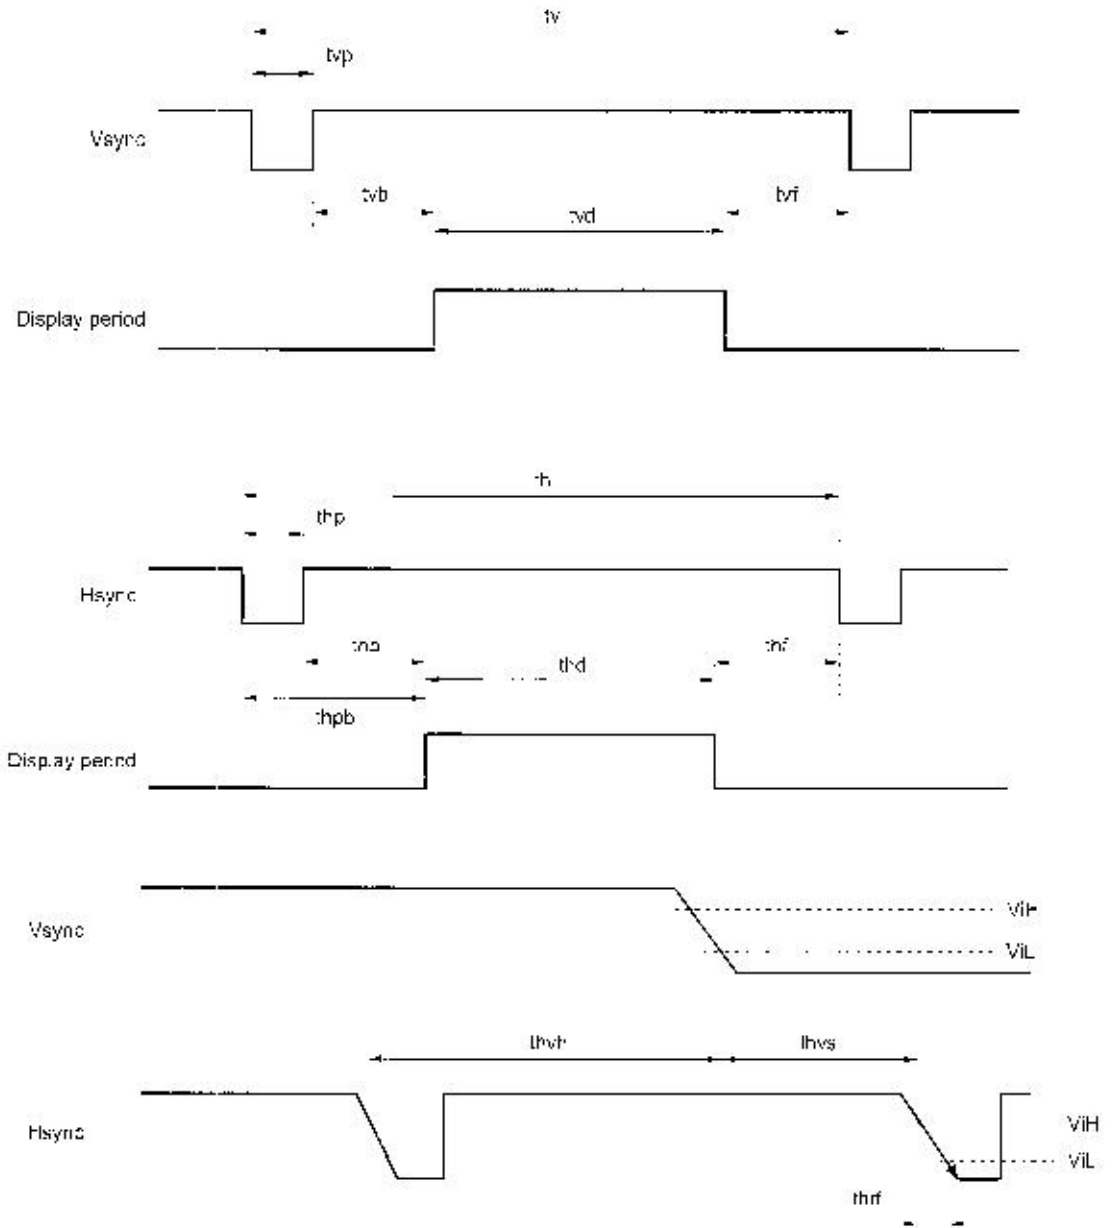


TIMING FOR GENERATING CLAMP SIGNAL INTERNALLY

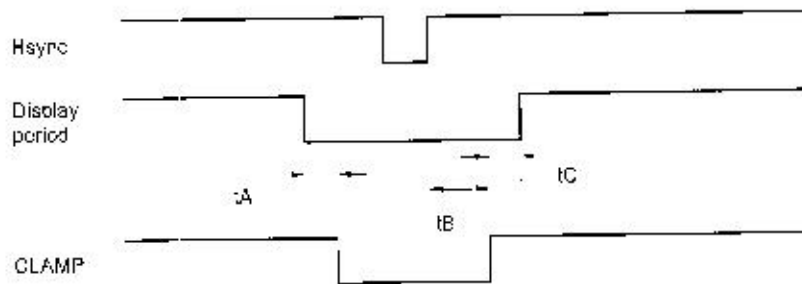

MOD1	MOD2	tA [CLK]	tB [CLK]	tC [ns]
0	0	Prohibit		
0	1	44	32	200 minimum
1	0	34	22	
1	1	28	18	

Note Exclude noises on analog R, G, B signal, because analog R, G, B signals are the back level reference during CLAMP = "L". If noises are on the analog signals, luminance level of display is changed and the display becomes bad.

TIMING FOR INPUTING CLAMP SIGNAL FROM OUTSIDE

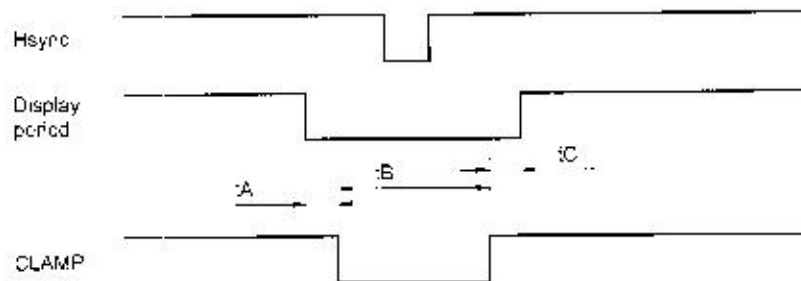

Item	Min.	Typ.	Max.	Unit	Remarks
tA	0.1	—	—	μs	—
tB	0.3	—	—	μs	—
tC	0.2	—	—	μs	—


Note Exclude noises on analog R, G, B signal, because analog R, G, B signals are the back level reference during CLAMP = "L". If noises are on the analog signals, luminance level of display is changed and the display becomes bad.

INPUT SIGNAL AND DISPLAY POSITION

FOR DESEL = "L" (XGA standard timing)


Pixels

D(0,0)	D(0,1)	D(0,2)	D(0,1023)
D(1,0)	D(1,1)	D(1,2)	D(1,1023)
D(2,0)	D(2,1)	D(2,2)	D(2,1023)
...
...
D(767,0)	D(767,1)	D(767,2)	D(767,1023)

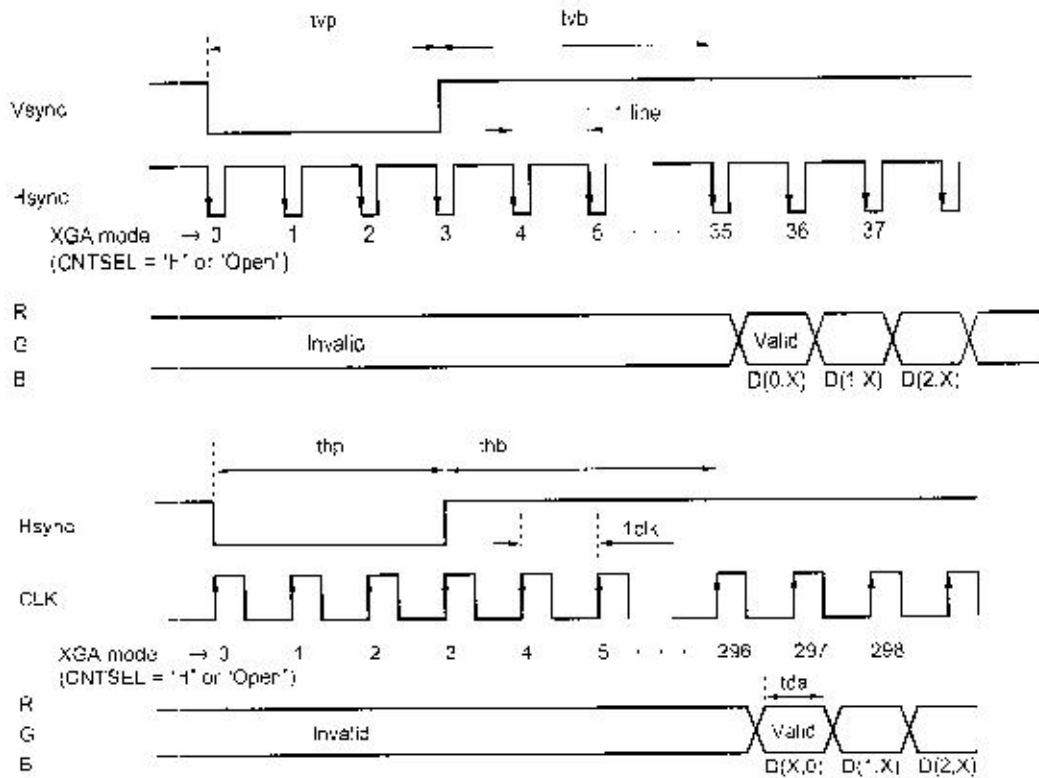

Note tca should be minimum 4ns

FOR DESEL = "H"

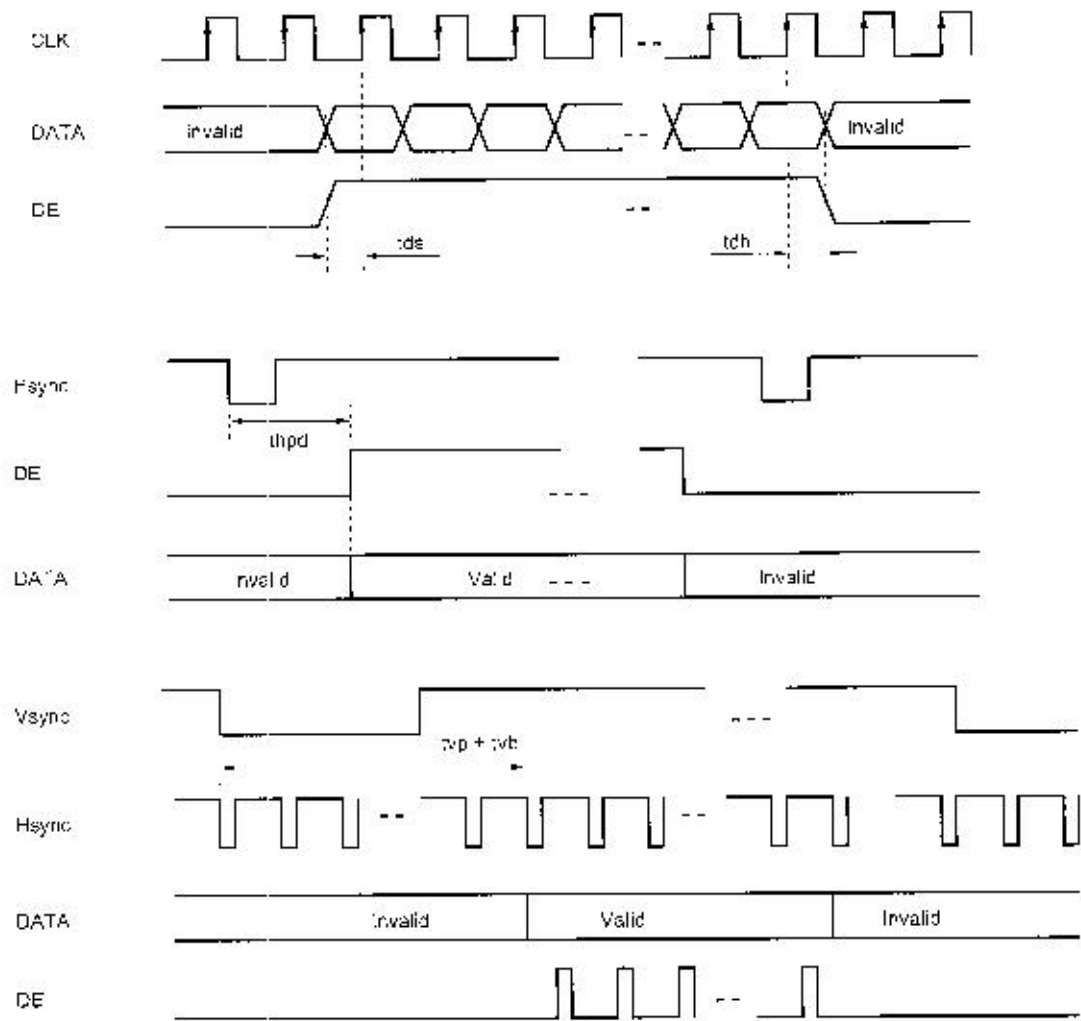

OPTICAL CHARACTERISTICS

(Ta = 25 °C, VDD = 12 V, VDDB = 12 V)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Contrast ratio	CR	Best contrast angle θR = 0, θL = 0, θU = 7°, White/Black	—	300	—	—	Note 1
		γ = 2.2 viewing angle θR = 0, θL = 0, θD = 5° White/Black	80	150	—	—	
Luminance	L _{max}	White	150	200	—	cd/m ²	Note 2
Luminance uniformity	—	White	—	—	1.30	—	Note 3
Color gamut	C	θR = 0, θL = 0, θU = 0, θD = 0, At center in NTSC	25	—	—	%	—
Response time	t _{pd}	White to black	—	—	40	ms	Note 4

Reference data


(Ta = 25 °C, VDD = 12 V, VDDB = 12 V)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Viewing angle range	θR	CR > 10, θU = 0, θD = 0	40	50	—	deg.	
	θL		40	50	—	deg.	
	θU	CR > 10, θR = 0, θL = 0	10	15	—	deg.	
	θD		25	30	—	deg.	
Luminance control range by BRTM/BRTL	—	Maximum luminance: 100 %	ACA = H	—	20 to 100	—	%
			ACA = L	—	40 to 100	—	

Notes 1. The contrast ratio is calculated by using the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance with all pixels in "white"}}{\text{Luminance with all pixels in "black"}}$$


2. The luminance is measured after 20 minutes from the module works, with all pixels in "white". The typical value is measured after luminance saturation.

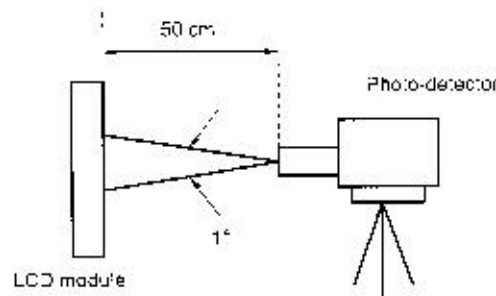


3. Luminance uniformity is calculated by using the following formula.

$$\text{Luminance uniformity} = \frac{\text{Maximum luminance}}{\text{Minimum luminance}}$$

The luminance is measured at near the five points shown below.

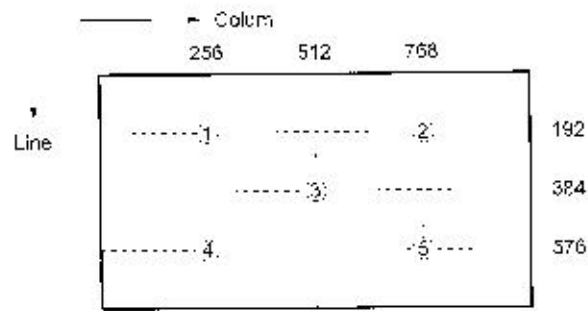


Notes 4. Definitions of viewing angle are as follows.

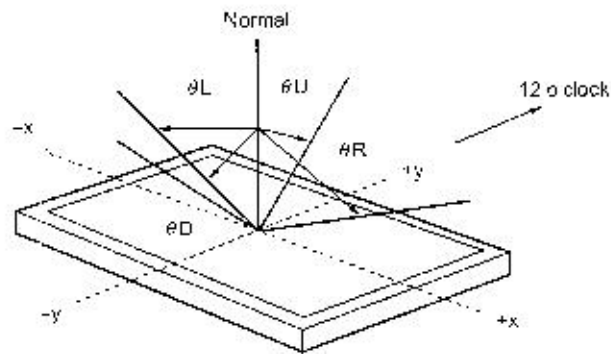



5. Definitions of response time is as follows.

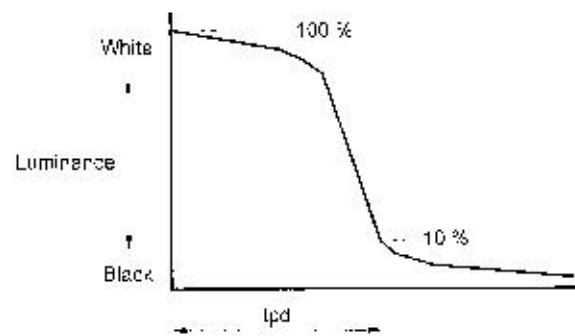
Photo-detector output signal is measured when the luminance changes "white" to "black". Response time is the time between 10 % and 100 % of the photo-detector output amplitude.






Next figures and sentence are very important. Please understand these, then read the text of a book.

	<p>CAUTION This figure is a mark that you will get hurt and/or the module will have damages when you make a mistake to operate.</p>
---	--

	<p>This figure is a mark that you will get an electric shock when you make a mistake to operate.</p>
---	--

	<p>This figure is a mark that the LCD module will give out smoke or catch fire when you make a mistake to operate.</p>
---	--


	<p>This figure is a mark that you will get hurt when you make a mistake to operate.</p>
---	---

	<p>CAUTION</p>
	<p>Do not touch an inverter --on which is stuck a caution label-- while the LCD module is under the operation, because of dangerous high voltage.</p>

(1) Caution when taking out the module

- <1> Pick the pouch only, in taking out module from a carrier box.

(2) Caution for handling the module

- <1> As the electrostatic discharges may break the LCD module, handle the LCD module with care against electrostatic discharges.
- <2>  As the LCD panel and backlight element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- <3> As the surface of polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- <4> Do not pull the interface connectors in or out while the LCD module is operating.
- <5> Put the module display side down on a flat horizontal plane.
- <6> Handle connectors and cables with care.
- <7> When the module is operating, do not lose CLK, Hsync, or Vsync signal. If any one of these signals is lost, the LCD panel would be damaged.
- <8> The torque of mounting screw should be 0.392 N·m (4 Kgf·cm) less.

(3) Caution for the atmosphere

- <1> Dew drop atmosphere should be avoided.
- <2> Do not store and/or operate the LCD module in a high temperature and/or high humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

<3> This module uses cold cathode fluorescent lamps. Therefore, the life time of lamps becomes short conspicuously at low temperature.

<2>



Do not operate the LCD module in a high magnetic field.

(4) Caution for the module characteristics

<1> Do not apply fixed pattern data signal to the LCD module at product aging. Applying fixed pattern for a long time may cause image sticking.

(5) Other cautions

<1> Do not disassemble and/or reassemble LCD module.

<2> Do not readjust variable resistor or switch etc.

<3> When returning the module for repair or etc., please pack the module not to be broken. We recommend to the original shipping packages.

Liquid Crystal Display has the following specific characteristics. There are not defects or malfunctions.


The display condition of LCD module may be affected by the ambient temperature.

The LCD module uses cold cathode tube for backlight. Optical characteristics, like luminance or uniformity, will change during time.

Uneven brightness and/or small spots may be noticed depending on different display patterns.

OUTLINE DRAWING (Unit in mm)

FRONT VIEW

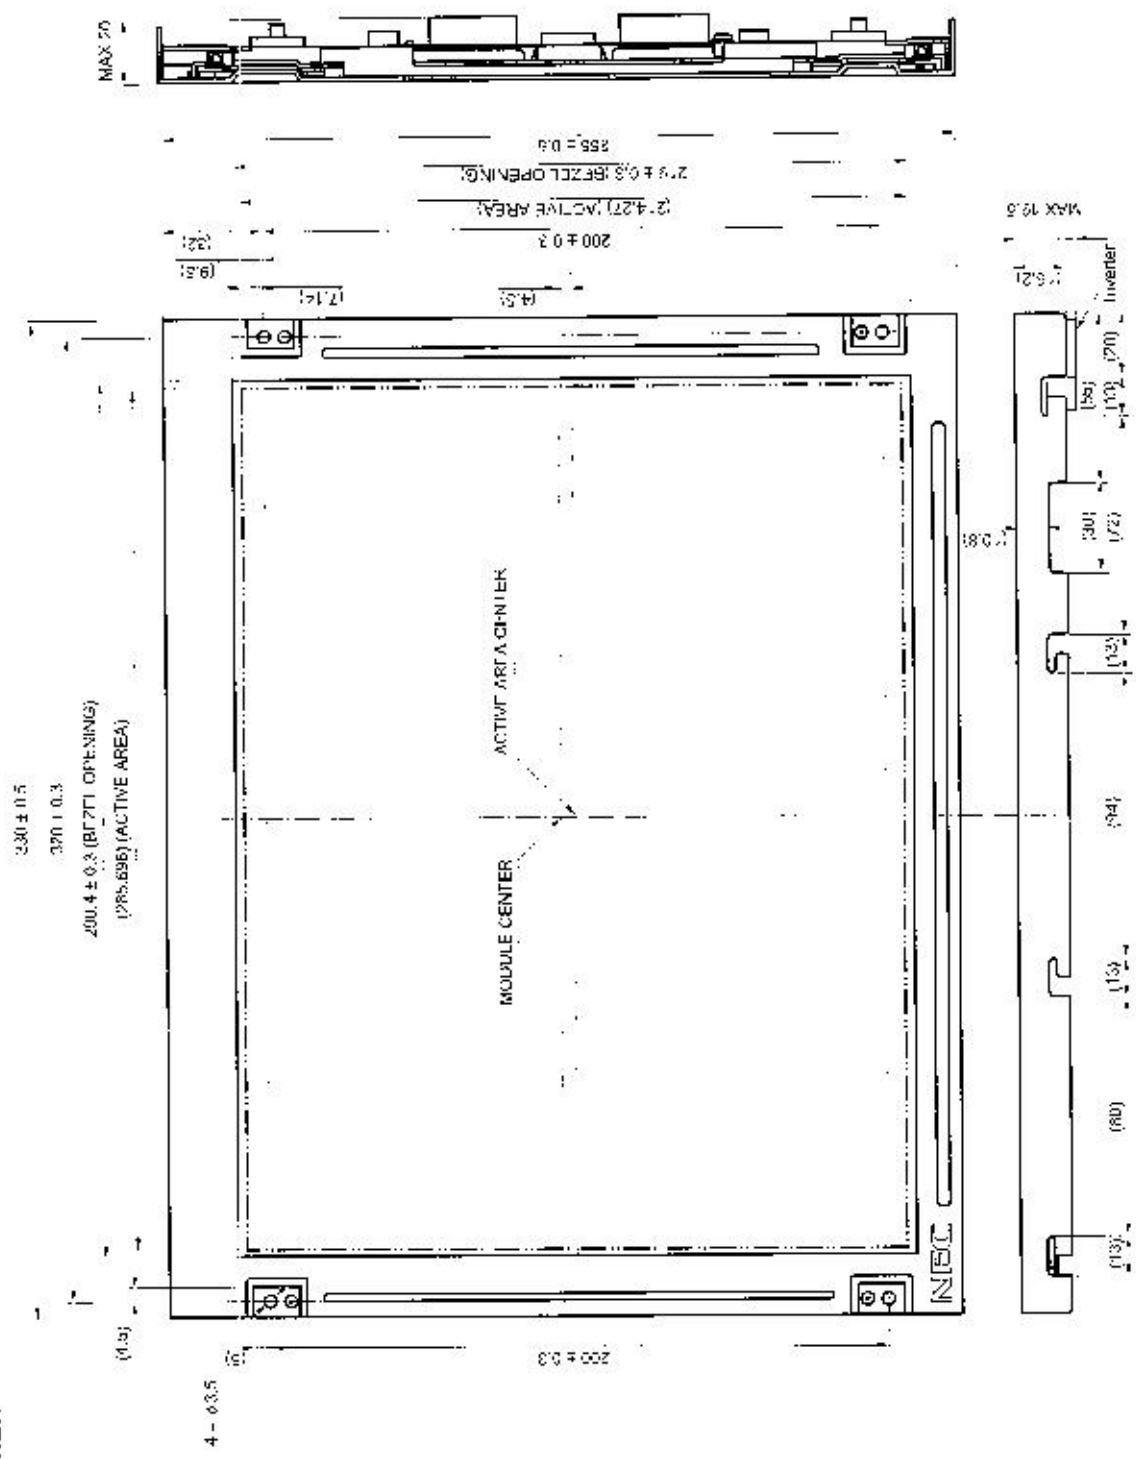

Notes 1. The value in parentheses are for reference.

2. The torque to mounting screw should never exceed 0.302 N·m (4 Kgf·cm).

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.

M4 96.5