

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07358 D T-33-31

2SB833SILICON PNP TRIPLE DIFFUSED TYPE
(DARLINGTON POWER)

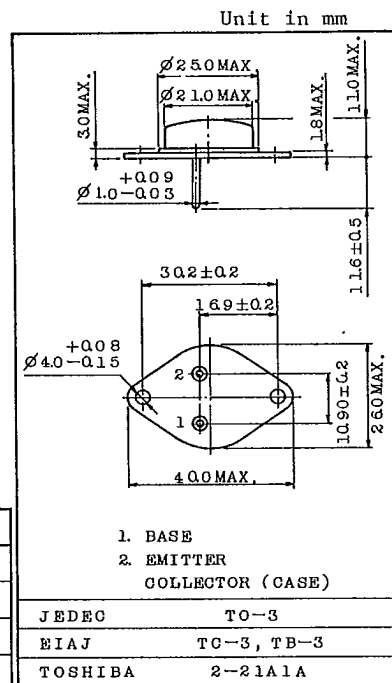
HIGH CURRENT SWITCHING APPLICATIONS.

FEATURES:

- High Collector Current : $I_C = -30A$
- High DC Current Gain
: $h_{FE(2)} = 1000(\text{Min.})$ ($V_{CE} = -5V$, $I_C = -20A$)
- Monolithic Construction with Built-In Base-Emitter Shunt Resistor.

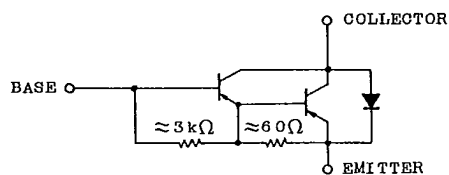
MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-80	V
Collector-Emitter Voltage	V_{CEO}	-80	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-30	A
Base Current	I_B	-1	A
Collector Power Dissipation ($T_c = 25^\circ C$)	P_C	150	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-65 ~ 150	$^\circ C$



Mounting kit No. AC73
Weight : 12.9g

EQUIVALENT CIRCUIT




TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07359

D T-33-31

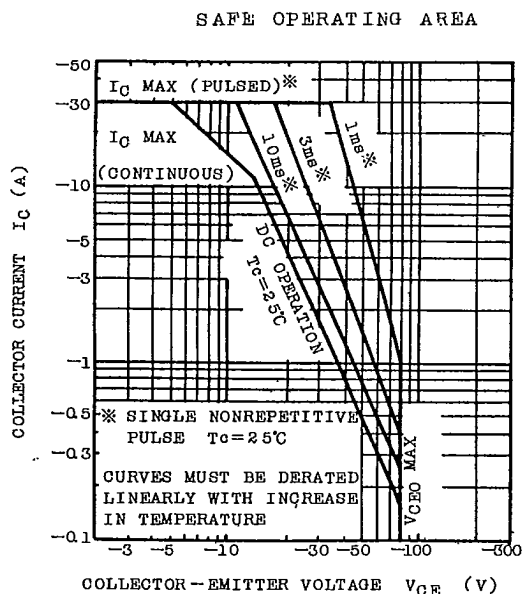
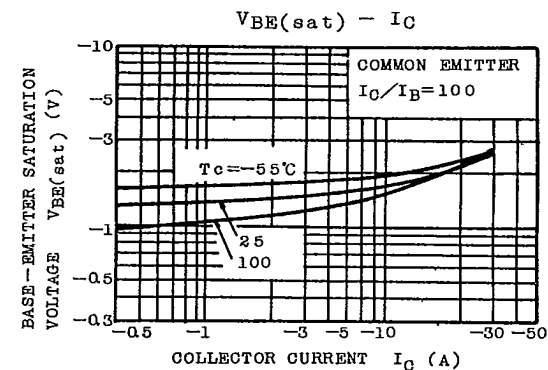
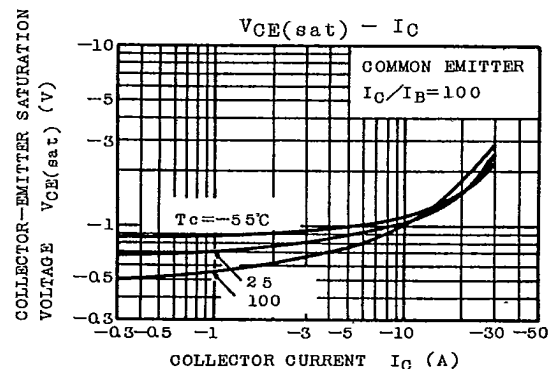
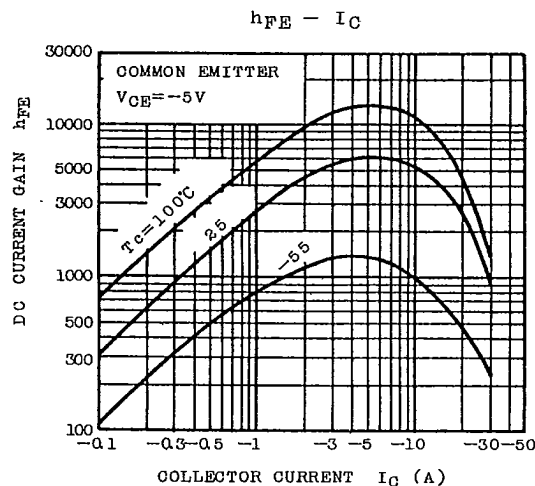
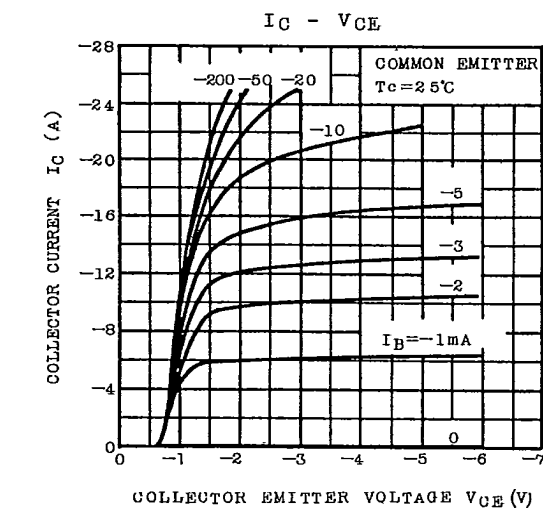
2SB833ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=-80\text{V}$, $I_E=0$	-	-	-100	μA
Emitter Cut-off Current		I_{EBO}	$V_{EB}=-5\text{V}$, $I_C=0$	-	-	-10	mA
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=-50\text{mA}$, $I_B=0$	-80	-	-	V
DC Current Gain		$h_{FE(1)}$	$V_{CE}=-5\text{V}$, $I_C=-20\text{A}$	1000	-	-	
		$h_{FE(2)}$	$V_{CE}=-5\text{V}$, $I_C=-30\text{A}$	200	-	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=-20\text{A}$, $I_B=-0.2\text{A}$	-	-	-3	V
Base-Emitter Saturation Voltage		$V_{BE(sat)}$		-	-	-3.5	V
Emitter-Collector Forward Voltage		V_{ECF}	$I_E=-10\text{A}$, $I_B=0$	-	-	-3	V
Transition Frequency		f_T	$V_{CE}=-5\text{V}$, $I_C=-1\text{A}$	-	10	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=-10\text{V}$, $I_E=0$, $f=1\text{MHz}$	-	400	-	pF
Switching Time	Turn-on Time	t_{on}	 $V_{CC}=-50\text{V}$ $R=10\Omega$ INPUT $20\mu\text{F}$ OUTPUT I_{B1}, I_{B2} $-I_{B1}=I_{B2}=0.01\text{A}$ DUTY CYCLE $\leq 1\%$	-	1.5	-	μs
	Storage Time	t_{stg}		-	4	-	
	Fall Time	t_f		-	2	-	

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07360 D T-33-31

2SB833

TOSHIBA CORPORATION