


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

FP16-150.DC2

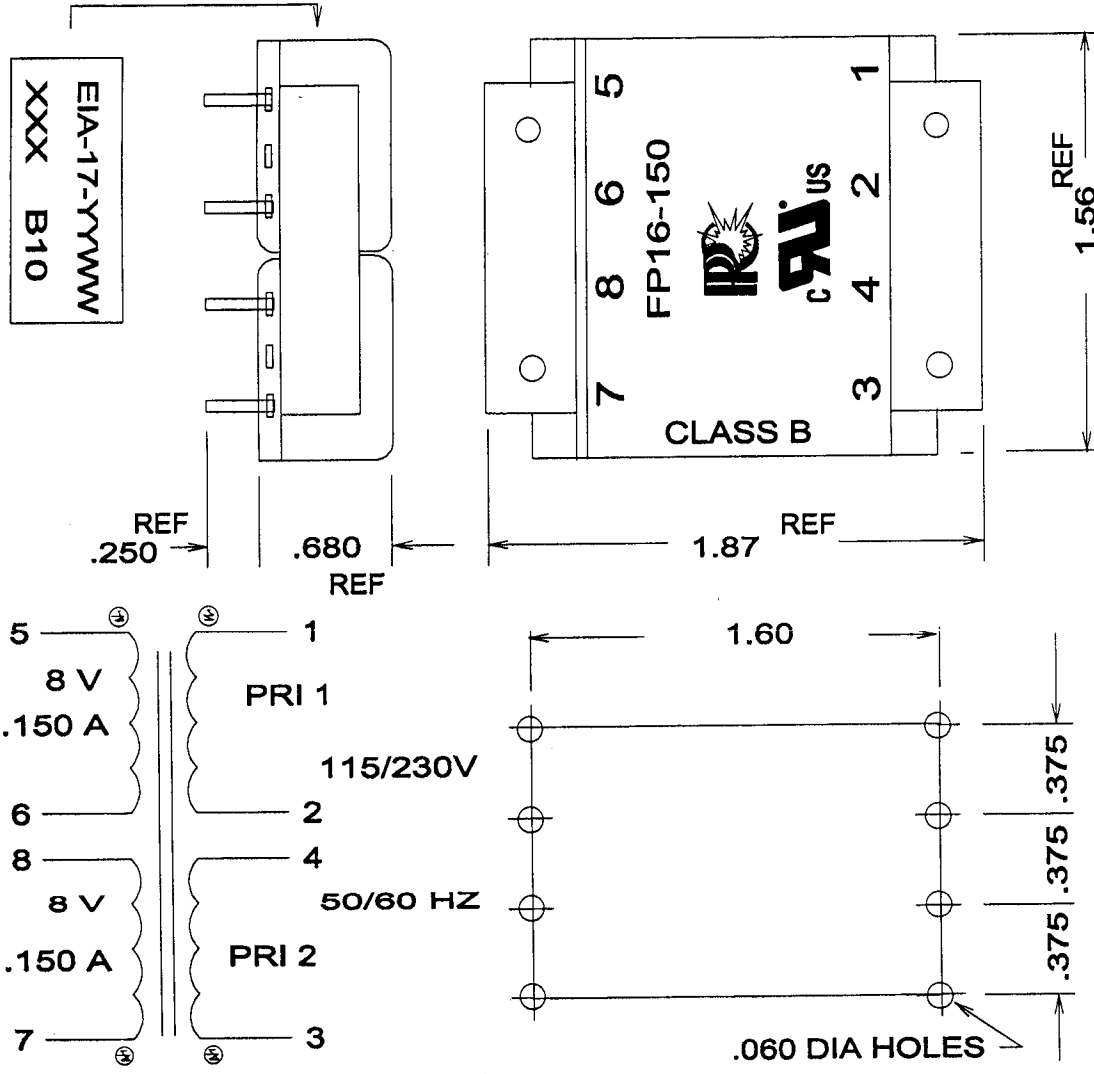

## PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS	1-2 = 3-4 = 765 TO 930
	5-6 = 7-8 = 6.6 TO 8.1

MAX EXCITATION CURRENT = .010 A  
 APPLY = 230V 60HZ, 1-4 (TIE 2+3)

OPEN CIRCUIT VOLTAGE

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 10.2 TO 10.7 V

HIPOT = 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES -PREHEAT 2 HRS  
 PINS TO FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING ON

PRINTED WRAPPER  
 DATE & SITE CODE ON DECAL



PART NO.: FP16-150