



Certificate Number: Q10561



Certificate Number: E17276

SR1R

FAST RECOVERY RECTIFIER DIODE

PRV : 2000 Volts

Io : 0.5 Ampere


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : SMA Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Lead Formed for Surface Mount
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.064 gram

SMA (DO-214AC)

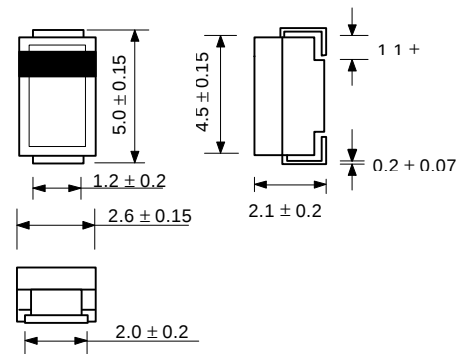

Dimensions in millimeter

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

RATING	SYMBOL	VALUE	UNIT
Maximum Repetitive Peak Reverse Voltage	VRRM	2000	V
Maximum RMS Voltage	VRMS	1400	V
Maximum DC Blocking Voltage	VDC	2000	V
Maximum Average Forward Current Ta = 75°C	IF(AV)	0.5	A
Maximum Peak Forward Surge Current	IFSM	30	A
Maximum Peak Forward Voltage at 0.5 A	VF	3.0	V
Maximum DC Reverse Current Ta = 25°C	IR	5.0	μA
at Rated DC Blocking Voltage Ta = 100°C	IR(H)	50	μA
Reverse Recovery Time (Note 1)	Trr	100	ns
Junction Capacitance (Note 2)	Cj	5.0	pF
Junction Temperature Range	Tj	- 40 to + 150	°C
Storage Temperature Range	TSTG	- 40 to + 150	°C

Notes :

- (1) Reverse Recovery Test Conditions : IF = 0.5 A, IR = 1.0 A, Irr = 0.25 A.
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 VDC

RATING AND CHARACTERISTIC CURVES (SR1R)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

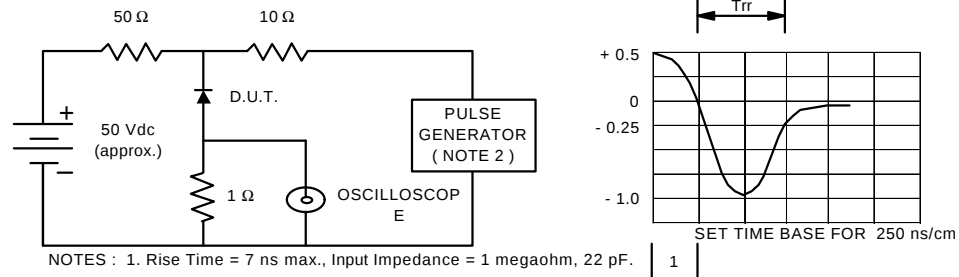


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

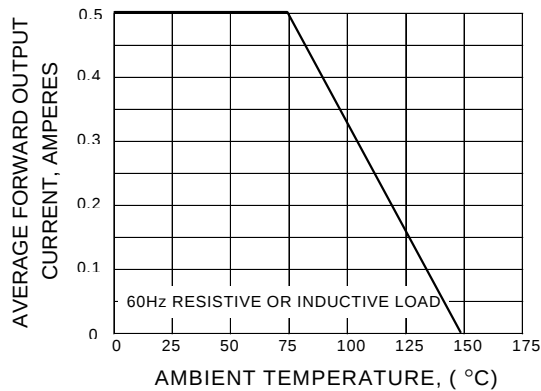


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

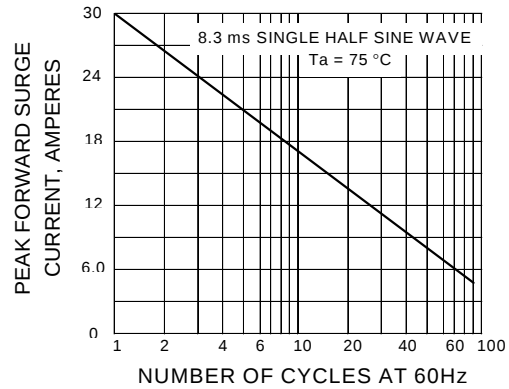


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

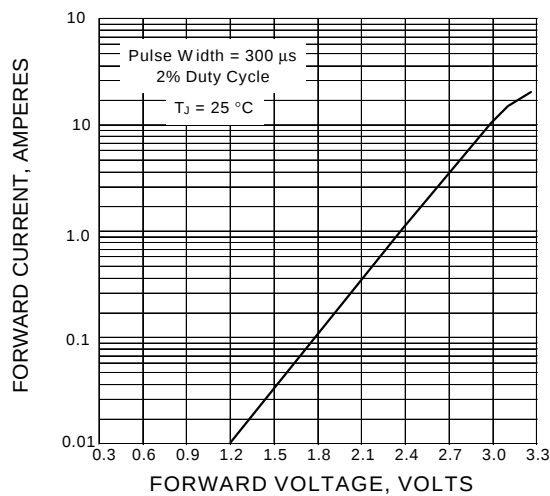


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

