


217 1314

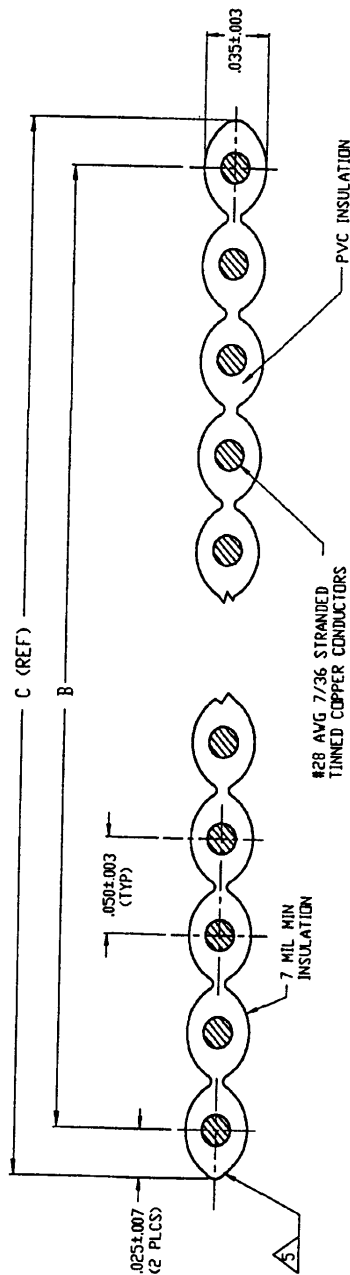

FLAT CABLE CROSS-SECTION

1. CABLE CERTIFIED TO:
 -UL CABLE STYLE: 2651
 -CSA: CSA AVN TA 105°C 300 V FT1
2. CABLE PHYSICAL SPECIFICATIONS:
 2.1 TEMPERATURE RATING: 105°C
 2.2 FLAMMABILITY:
 -UL: VV1
 -CSA: FT1
 2.3 INSULATION: GRAY FLAME RETARDANT FLEXIBLE PVC
 2.4 CONDUCTORS: 28 AWG 7/36 STRANDED TINNED COPPER
3. TYPICAL ELECTRICAL VALUES:
 3.1 VOLTAGE RATING: 300 V
 3.2 INSULATION RESISTANCE: 10,000 MEGOHMS/10 FT
 3.3 CAPACITANCE: 105 DHMS NOMINAL (GND-SIG-GND)
 3.4 CAPACITANCE: 13.5 pF/FT
 3.5 PROPAGATION DELAY: 145 ns/FT
 3.6 CROSSTALK: 10 FT SAMPLE 5ns RISE TIME
 NEAR END: 3.0%
 FAR END: 4.0%
4. CABLE SURFACE PRINTED PER UL AND CSA REQUIREMENTS.
 RED EDGE MARK ON CONDUCTOR #1.
 REEL QUANTITY: 100 FT. REEL MAY CONTAIN SEPARATE LENGTHS.
 20 FT MIN PER LENGTH. TWO LENGTHS MAX PER REEL.

REEL QTY	DIM C	DIM B	NO OF COND	PART NUMBER
6	1,000	.950±.010	20	57040-1
	1,250	1.200±.010	25	57040-2
	1,300	1.250±.010	26	57040-3
	1,700	1.650±.010	34	57040-4
	2,000	1.950±.015	40	57040-5
	2,500	2.450±.015	50	57040-6
	3,000	2.950±.015	60	57040-7
	1,400	1.350±.010	28	57040-8
	.450	.400±.010	9	1-57040-2
	.500	.450±.010	10	1-57040-3
	.700	.650±.010	14	1-57040-4
	.750	.700±.010	15	1-57040-5
	.800	.750±.010	16	1-57040-6
	1,200	1.150±.010	24	1-57040-7
	1,850	1.800±.010	37	1-57040-8
	.400	.350±.010	8	2-57040-1
	.300	.250±.010	6	1-57040-9
	3,200	3.150±.015	64	2-57040-2
	900	.850±.010	18	2-57040-3
	2,200	2.150±.015	44	2-57040-4
	1,800	1.750±.015	36	2-57040-5
	600	.550±.010	12	2-57040-9

[illegible]