

DIGITAL DELAY LINE SERIES A447 LOW POWER MODULE 20 MA TYP 5 TAP/FIXED DELAY

TECHNICAL INFORMATION

TEST CONDITIONS


Pulse Voltage	3.2 Volts
Rise Time	3.0 Nsec (10%-90%)
Pulse Width	1.2 x Total Delay
Pulse Period	4 x Pulse Width
Supply Current, ICCL	20.0 Milliamps typical
Supply Voltage, Vcc	5.0 Volts
Ambient Temperature	25°C

PERFORMANCE CHARACTERISTICS

Delay Tolerance From Input To Tap
± 2 Nsec or 5% whichever is greater
Delay Tolerance From Tap To Tap
± 2 Nsec or 7% whichever is greater
Performance Characteristics apply at
above listed Test Conditions.


ELECTRICAL CHARACTERISTICS

Supply Voltage, Vcc	4.75 to 5.25 Volts
Logic 1 Input Current	20 Microamp max.
Logic 0 Input Current	- 0.4 Milliamp max.
Logic 1 Output Voltage	2.7 Volts min.
Logic 0 Output Voltage	0.5 Volts max.
Operating Temperature Range	0°C To 70°C
Temperature Coefficient Of Total Delay	500PPM/°C Typical
Minimum Input Pulse Width	40% Of Total Delay
Maximum Duty Cycle	50%
10 TTL Loads/Tap max.	
20 TTL Loads/Unit max.	
—Compatible with TTL and DTL circuits	
—Other delays and tolerances upon request	

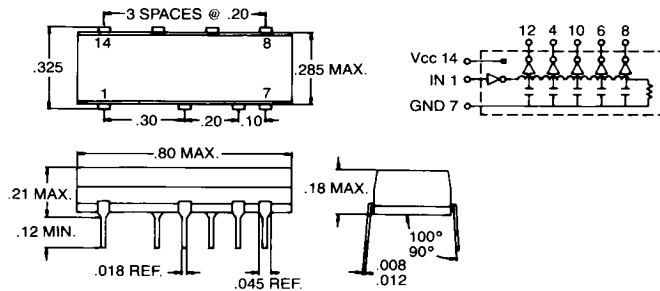

5 TAP

Part Number	Total Delay 1, 3	Delay/Tap 1, 3	Rise Time 2, 3
A447-0025-09	25NS	5NS	8NS
A447-0050-09	50NS	10NS	8NS
A447-0100-09	100NS	20NS	8NS
A447-0150-09	150NS	30NS	8NS
A447-0200-09	200NS	40NS	8NS
A447-0250-09	250NS	50NS	8NS
A447-0300-09	300NS	60NS	8NS
A447-0350-09	350NS	70NS	8NS
A447-0400-09	400NS	80NS	8NS
A447-0450-09	450NS	90NS	8NS
A447-0500-09	500NS	100NS	8NS

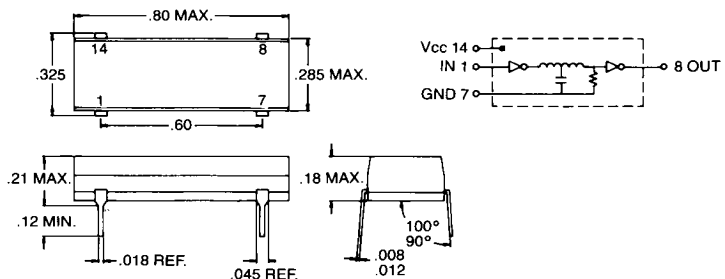

FIXED DELAY

Part Number	Total Delay 1, 3	Rise Time 2, 3	Part Number	Total Delay 1, 3	Rise Time 2, 3
A447-0010-08	10NS	8NS	A447-0125-08	125NS	8NS
A447-0020-08	20NS	8NS	A447-0150-08	150NS	8NS
A447-0030-08	30NS	8NS	A447-0175-08	175NS	8NS
A447-0040-08	40NS	8NS	A447-0200-08	200NS	8NS
A447-0050-08	50NS	8NS	A447-0250-08	250NS	8NS
A447-0060-08	60NS	8NS	A447-0300-08	300NS	8NS
A447-0070-08	70NS	8NS	A447-0350-08	350NS	8NS
A447-0080-09	80NS	8NS	A447-0400-08	400NS	8NS
A447-0090-08	90NS	8NS	A447-0450-08	450NS	8NS
A447-0100-08	100NS	8NS	A447-0500-08	500NS	8NS

1 Delays measured at 1.5 Volt level on Leading Edge only.
2 Rise Times measured from .8 Volts to 2 Volts.
3 Measured with no loads on taps.

Specifications Subject To Change Without Notice