



1. Mechanical Dimensions:

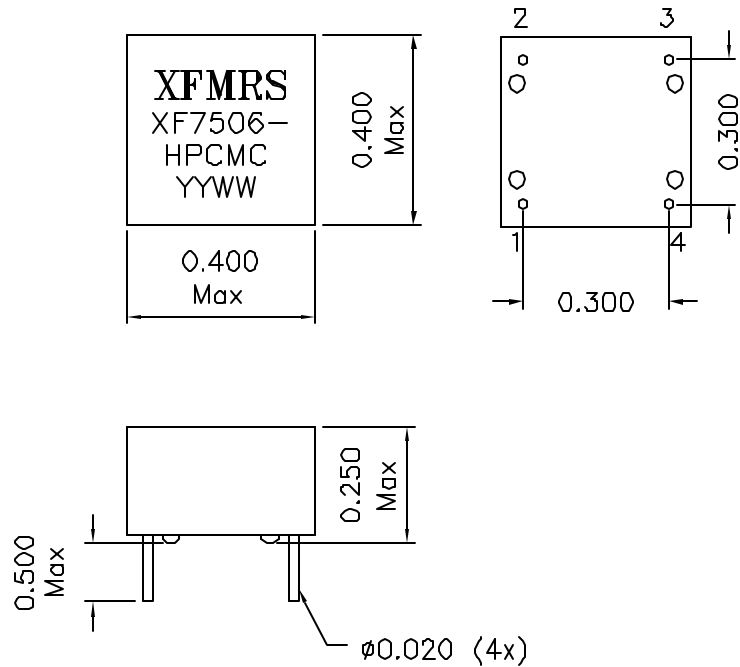

2. Schematic:

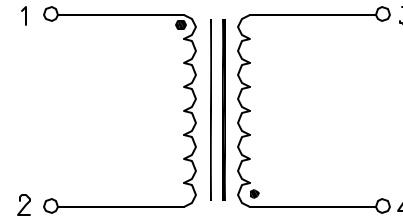

3. Electrical Specifications: @25°C

DCL: 750uH±25% @100KHz 0.1V

Cw/w: 15pF Max, Wdg to Wdg

DCR: 0.3 Ohms Max

Turns Ratio: 1:1

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Moisture Sensitivity: Level 2
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component

DOC. REV A/1

XFMRS Inc www.XFMRS.com		Title: COMMON MODE CHOKE		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF7506-HPCMC	REV 00		
	DWN.	李清儿	Nov-10-04	
SHEET 1 OF 1	CHK.	孙小松	Nov-10-04	
	APP.	J Ng	Nov-10-04	