
AR-10T / AR-15T / AR-30T



Next Two's metal horn loudspeakers are manufactured in robust spun aluminium and are designed for heavy-duty industrial use. They are coated in a tough, grey epoxy finish. Switchable tappings allow the installer to adjust sound pressure levels without rewiring.


Suitable for both indoor and outdoor use, these compact re-entrant horns provide high sensitivity combined with a tightly controlled dispersion pattern.


The AR-15 and AR-30 come complete with a 20mm weatherproof gland entry plate. The AR-10 is supplied with a 300mm flying lead.

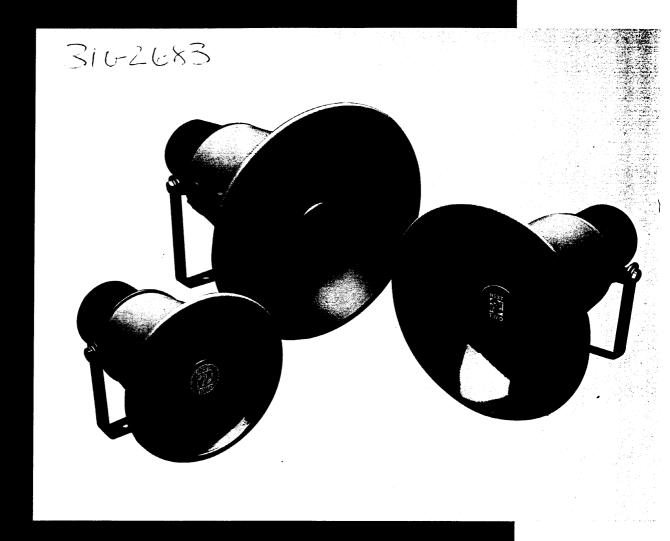





	AR-10T	AR-15T	AR-30T
Dimensions front and depth, mm	Ø160 x 180	Ø223 x 240	Ø285 x 335
Colour / finish	Light grey	Light grey	Light grey
Material	Aluminium	Aluminium	Aluminium
Mounting	"U" Bracket	"U" Bracket	"U" Bracket
Terminal	300mm flying lead	Screw Clamp	Screw Clamp
Net weight, Kg	1.5	2.2	2.6
Transformer power tappings, watts	2.5, 5, 10	2.0, 4.0, 7.7, 15.0	5.0, 10.0, 15.0, 20.0, 30.0
Input impedance standard model, ohms	4k, 2k, 1k	5k, 2.5k, 1.3k, 666	2k, 1k, 666, 500, 333
Rated power, watts	10	15	30
Maximum power, RMS, watts	10	15	30
Dispersion at 1000 Hz, degrees° conical	120	110	100
IP Norm	65	66	66
Power, watts	10	15	30
Effective frequency range, Hz	350 - 5000	355 - 6000	350 - 5000
Sound pressure level, power watts / 1m, dB	114	117	122
Sound pressure level, 1 watt / 1m, dB	104	106	107
Max / min ambient temperature degrees°C	-20 / +70	-20 / +70	-20 / +70









AR-10T










AR-30T









Next Two Limited

Bellbrook Industrial Estate, Uckfield, East Sussex TN22 1QL Tel: +44 (0)1825 765478

Fax: +44 (0)1825 768746

e-mail: nexttwo@compuserve.com



As loudspeaker specialists, Next Two are committed to help you fulfil your speaker requirements. Your success guarantees ours.