
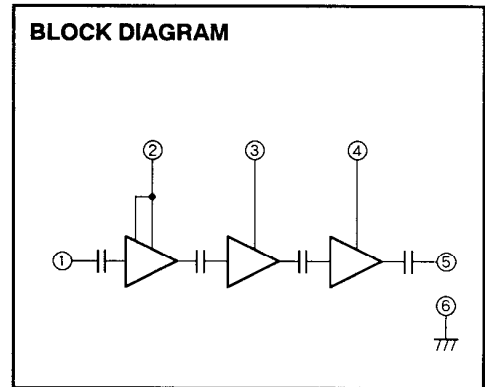


M57788UH

470-490MHz, 12.5V, 40W, FM MOBILE RADIO

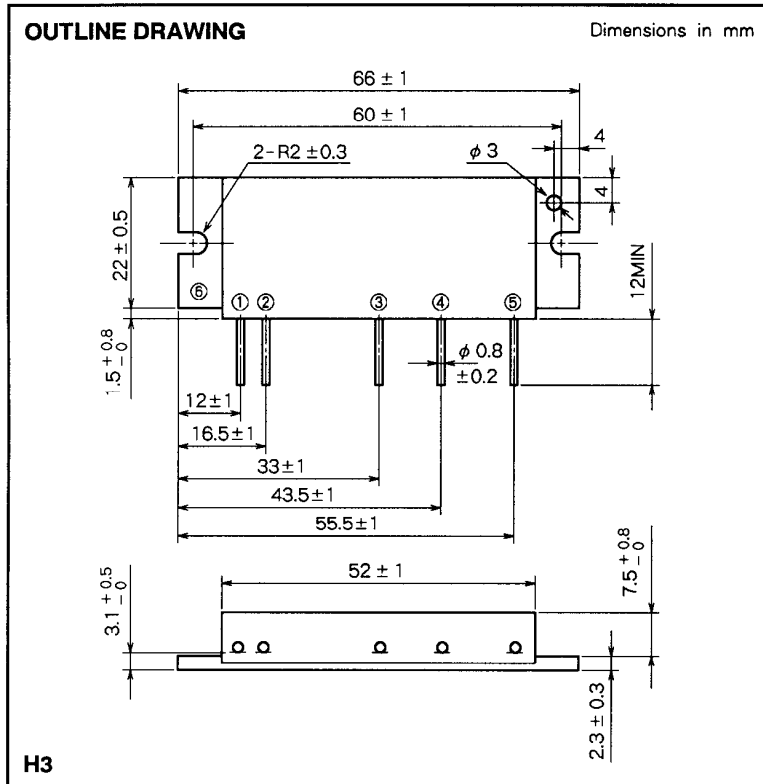

- PIN :
- ① Pin : RF INPUT
 - ② Vcc1 : 1st. DC SUPPLY
 - ③ Vcc2 : 2nd. DC SUPPLY
 - ④ Vcc3 : 3rd. DC SUPPLY
 - ⑤ Po : RF OUTPUT
 - ⑥ GND : FIN

ABSOLUTE MAXIMUM RATINGS (T_c = 25 °C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V _{cc1}	Supply voltage		16	V
V _{cc2,3}		17	V	
I _{cc}	Total current		12	A
P _{in(max)}	Input power	Z _G = Z _L = 50 Ω	0.5	W
P _{O(max)}	Output power	Z _G = Z _L = 50 Ω	50	W
T _{c(OP)}	Operation case temperature		- 30 to 110	°C
T _{stg}	Storage temperature		- 40 to 110	°C

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (T_c = 25 °C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit	
			Min	Max		
f	Frequency range		470	490	MHz	
P _o	Output power	P _{in} = 0.3W V _{cc} = 12.5V Z _G = Z _L = 50 Ω	40		W	
η _T	Total efficiency		40		%	
2f _o	2nd. harmonic			- 30		dBc
3f _o	3rd. harmonic			- 30		dBc
ρ _{in}	Input VSWR				3.5	-
-	Load VSWR tolerance	V _{cc} = 15.2V, P _o = 40W (P _{in} : controlled) Load VSWR = 8.8 : 1 (All phase), Z _G = 50 Ω	No degradation or destroy		-	

Note. Above parameters, ratings, limits and conditions are subject to change.