




AIR SUCTION FILTER SERIES ZFB

- ✓ Built-in one-touch fittings
- ✓ Tubing can be installed through 360°
- ✓ Compact and light weight
- ✓ Simple element change



SYMBOLS




TECHNICAL SPECIFICATIONS


Fluid	Air, dry nitrogen
Operating pressure	Negative pressure
Proof pressure	0.5MPa
Temperature range	0~60°C (No freezing)
Filtration	30 μm
Element proof D.P.	0.15MPa
Applicable tube material	Nylon, soft nylon, polyurethane

DIMENSIONS

AIR SUCTION FILTER SERIES ZFB

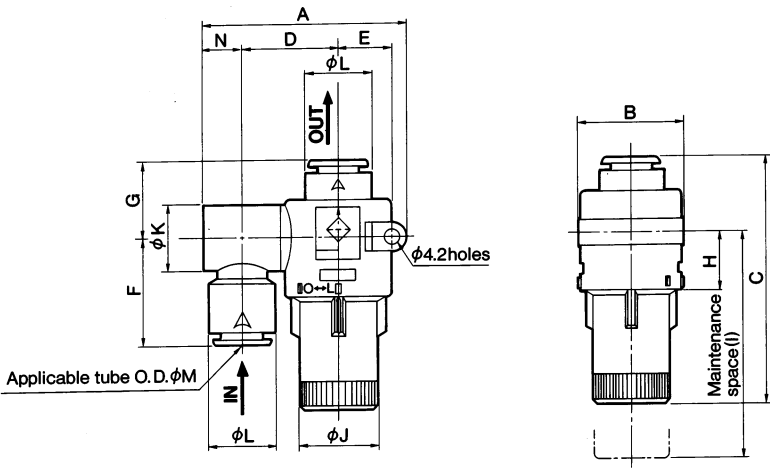


APPLICATION TO VACUUM PUMP SYSTEM

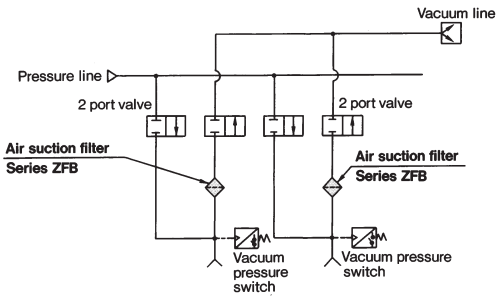

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N
ZFB100-04	48	26	53	22.5	12.5	24	17.5	15	50	15.5	14.4	12.8	4	8.5
ZFB100-06													6	
ZFB200-06	52	28	65	24.5	13.5	27	19.5	16	61	17.5	16.6	15.2	6	9.5
ZFB200-08													8	
ZFB300-08	57	30	69.5	27	14.5	29.5	21	17	65	21.5	18	18.5	8	11
ZFB300-10													10	

APPLICATION TO EJECTOR SYSTEM

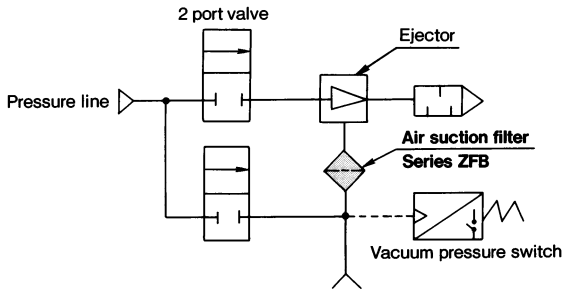

HOW TO ORDER  
AIR SUCTION FILTER SERIES ZFB

ZFB	—	—
BODY SIZE		TUBE SIZE ODMM
100 ...Max 20 ℓn/min	04 ...Ø4	
200 ...Max 50 ℓn/min	06 ...Ø6	
300 ...Max 75 ℓn/min	08 ...Ø8	
	10 ...Ø10	

ACCESSORIES  
AIR SUCTION FILTER SERIES ZF1B

ELEMENT	
I-34S-A	...ZFB100
I-35S-A	...ZFB200
I-36S-A	...ZFB300

STOCKED PRODUCTS  
FOR A LIST OF STOCKED PRODUCTS,  
PLEASE SEE THE CURRENT SMC PRICE LIST

STOCKED PRODUCTS  
FOR A LIST OF STOCKED PRODUCTS,  
PLEASE SEE THE CURRENT SMC PRICE LIST



FOR FURTHER TECHNICAL  
DETAILS ON THIS  
PRODUCT REQUEST  
CATALOGUE REFERENCE  
E809