




9.6x9.6 Square/ Single Turn /Trimming Potentiometer




-- 3386C --

图中公式：除注明外均为±0.25
Tolerance is ± 0.25 if no identification

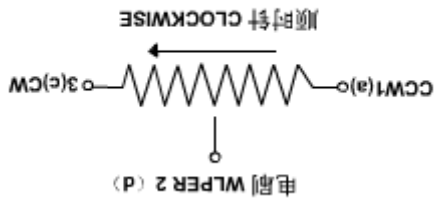

Install dimension

Mutual dimension

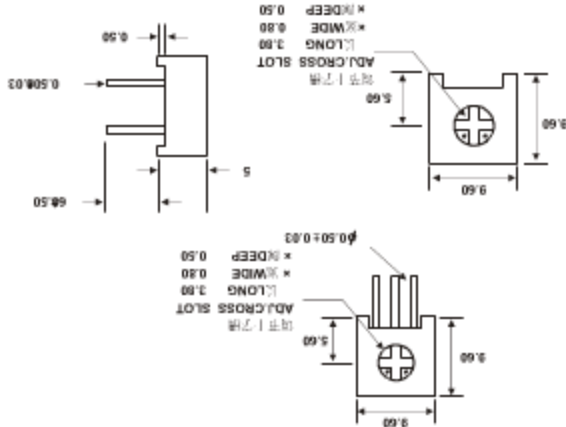

Standard Resistance Table

Resistance Code	Resistance (Ohms)	Special resistances available
100	10	205
200	20	105
500	50	504
101	100	254
201	200	204
501	500	104
102	1,000	503
202	2,000	253
502	5,000	203
103	10,000	103
203	20,000	504
503	50,000	254
104	100,000	204
204	200,000	105
504	500,000	205
254	250,000	
105	1,000,000	
205	2,000,000	

Physical Characteristics

Temperature Range.....-55°C~125°C
 Temperature Coefficient.....±250ppm/°C
 Temperature Variation.....55°C,30min,+125°C
 30min
 5cycles
 $\Delta R \leq 5\%R, \Delta(Uab/Uac) \leq 10\%$
 Collision.....100m/s²,1000cycles, $\Delta R \leq 2\%$
 Electrical Endurance at 70°C.....0.5W@70°C
 $1000h, \Delta R \leq 10\%$
 $\Delta(Uab/Uac) \leq 10\%, CRV \leq 3\%$ or 5Ω
 Rotational Life.....200cycles
 $\Delta R \leq 10\%R, CRV \leq 3\%$ or 5Ω

Environmental Characteristics

Standard Resistance Range.....50Ω~2MΩ
 Resistance Tolerance.....±10%
 Absolute Minimum Resistance..... $\leq 1\%R$ 或 10Ω
 Contact Resistance Variation.....CRV≤ 3%
 Insulation Resistance.....R1 ≥ 1GΩ (100Vac)
 Withstand Voltage.....600Vac
 Effective Travel.....300°

Electrical Characteristics

Power Rating, 315 volts max
 0.5W@70°C,0W@125°C

How To Order

