


TOLERANCE UNLESS SPECIFIED = .XXX= +/- .005 .XX= +/- .015 FRACTIONS= +/- .032

FP16-750.DC2

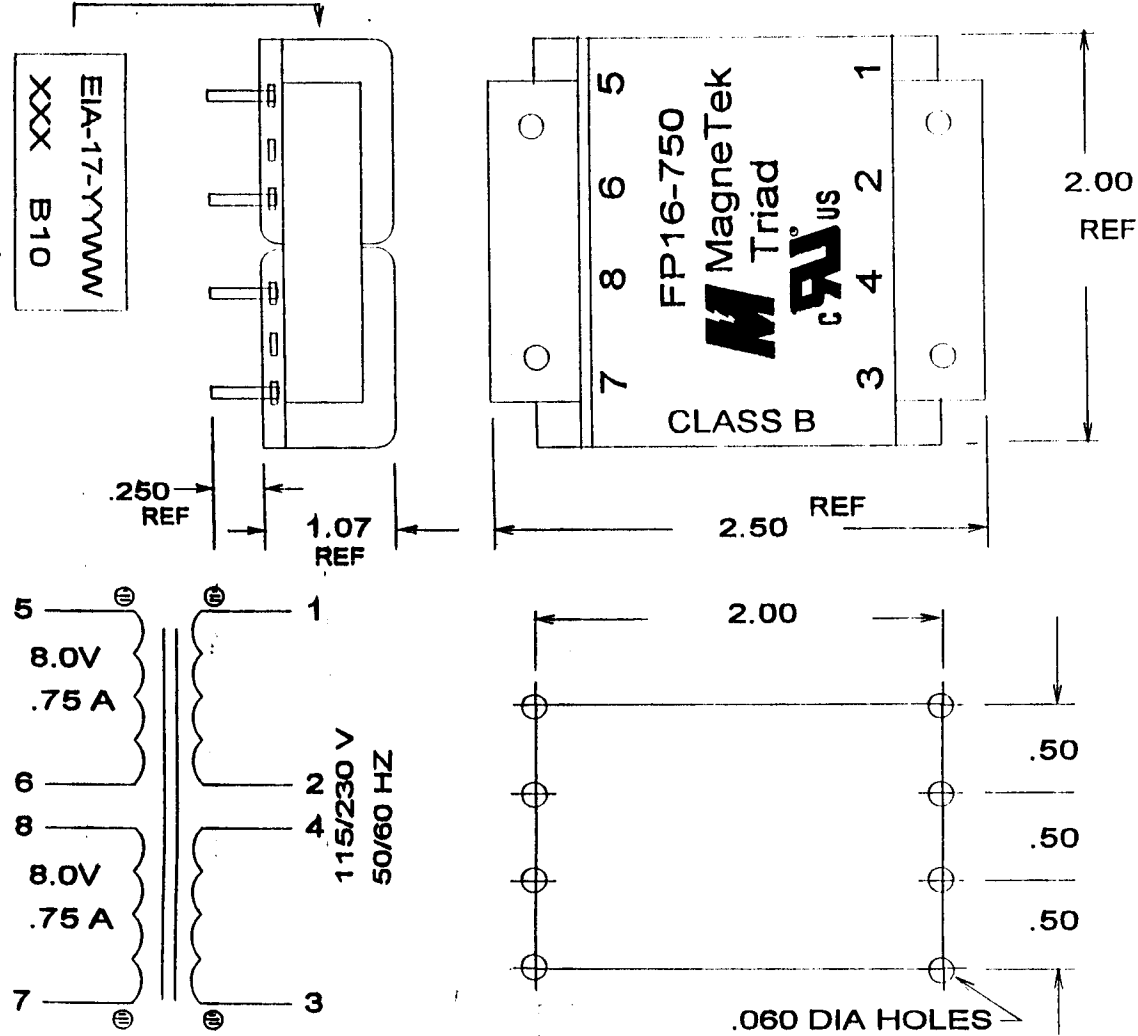

PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS	1-2 = 114 TO 140
	3-4 = 114 TO 140
NOM	5-6 = .75 TO .93
	7-8 = .75 TO .93

MAX EXCITATION CURRENT = .022 A
 APPLY = 230V, 60 HZ, 1-4, TIE 2+3
 1-2 = 3-4 = 115V
 EACH SEC, 9.3 TO 9.7 V

HIPOT = 2000V PRI'S TO SEC'S
 1500V PRI'S, SEC'S TO CORE
 500V P-P, S-S

IMPREGNATION NOTES -- PREHEAT 2 HRS
 PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

MagneTek

PART NO. FP16-750