
HB56TW433D Series

4,194,304-word $\times$ 32-bit High Density Dynamic RAM Module

HITACHI

ADE-203-
Rev. 0.0
Dec. 1, 1995

Description

The HB56TW433D is a 4 M $\times$ 32 dynamic RAM Small Outline DIMM (S. O. DIMM), mounted 8 pieces of 16Mbit DRAM (HM51W17400BTS/ BLTS) sealed in TSOP package. An outline of the HB56TW433D is 72-pin Zig Zag Dual tabs socket type compact and thin package. Therefore, the HB56TW433D makes high density mounting possible without surface mount technology. Decoupling capacitors are mounted beside the each TSOP of its module board.

Features

- 72-pin
 - Lead pitch: 1.27 mm
- Single 3.3 V (± 0.3 V) supply
- High speed
 - Access time: 60/70/80 ns (max)
- Low power dissipation
 - Active mode: 3.17/2.88/2.59 W (max)
 - Standby mode: 57.6 mW (max)
2.88 mW (max) (L-version)
- Fast page mode capability
- 2,048 refresh cycle: 32 ms
: 128 ms (L-version)
- 4 variations of refresh
 - $\overline{\text{RAS}}$ -only refresh
 - $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh
 - Hidden refresh
 - Self refresh (L-version)
- TTL compatible
- Test function


HB56TW433D Series

Ordering Information

Type No.	Access Time	Package	Contact Pad
HB56TW433D-6B	60 ns	72-pin Small outline DIMM	Gold
HB56TW433D-7B	70 ns		
HB56TW433D-8B	80 ns		
HB56TW433D-6BL	60 ns		
HB56TW433D-7BL	70 ns		
HB56TW433D-8BL	80 ns		

HB56TW433D Series

Pin Arrangement

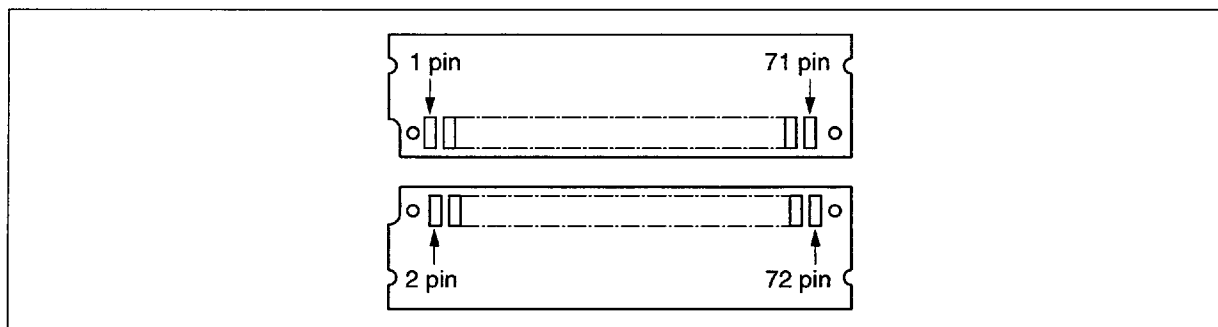

Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name
1	V _{SS}	37	DQ18	2	DQ0	38	DQ19
3	DQ1	39	V _{SS}	4	DQ2	40	$\overline{\text{CE}}0$
5	DQ3	41	$\overline{\text{CE}}2$	6	DQ4	42	$\overline{\text{CE}}3$
7	DQ5	43	$\overline{\text{CE}}1$	8	DQ6	44	$\overline{\text{RE}}0$
9	DQ7	45	NC	10	V _{CC}	46	NC
11	PD1	47	$\overline{\text{WE}}$	12	A0	48	NC
13	A1	49	DQ20	14	A2	50	DQ21
15	A3	51	DQ22	16	A4	52	DQ23
17	A5	53	DQ24	18	A6	54	DQ25
19	A10	55	NC	20	NC	56	DQ27
21	DQ9	57	DQ28	22	DQ10	58	DQ29
23	DQ11	59	DQ31	24	DQ12	60	DQ30
25	DQ13	61	V _{CC}	26	DQ14	62	DQ32
27	DQ15	63	DQ33	28	A7	64	DQ34
29	NC	65	NC	30	V _{CC}	66	PD2
31	A8	67	PD3	32	A9	68	PD4
33	NC	69	PD5	34	$\overline{\text{RE}}2$	70	PD6
35	DQ16	71	PD7	36	NC	72	V _{SS}

HB56TW433D Series

Pin Description

Pin Name	Function
A0 to A10	Address input
A0 to A10	Refresh address input
DQ0 to DQ7	Data-in/data-out
DQ9 to DQ16	
DQ18 to DQ25	
DQ 27 to DQ 34	
$\overline{CE0}$ to $\overline{CE3}$	Column address strobe ($\overline{CAS}$)
$\overline{RE0}$, $\overline{RE2}$	Row address strobe ($\overline{RAS}$)
$\overline{WE}$	Read/write enable
V_{cc}	Power supply (+3.3 V)
V_{ss}	Ground
PD1 to PD7	Presence detect pin
NC	No connection

Presence Detect Pin Arrangement

Pin No.	Pin Name	HB56TW433D					
		-6B	-7B	-8B	-6BL	-7BL	-8BL
11	PD1	NC	NC	NC	NC	NC	NC
66	PD2	NC	NC	NC	NC	NC	NC
67	PD3	V_{ss}	V_{ss}	V_{ss}	V_{ss}	V_{ss}	V_{ss}
68	PD4	NC	NC	NC	NC	NC	NC
69	PD5	NC	V_{ss}	NC	NC	V_{ss}	NC
70	PD6	NC	NC	V_{ss}	NC	NC	V_{ss}
71	PD7	NC	NC	NC	V_{ss}	V_{ss}	V_{ss}

HB56TW433D Series

Absolute Maximum Ratings

Parameter		Symbol	Value	Unit
Voltage on any pin relative to V_{SS}	(Input)	V_{in}	-0.5 to +4.6	V
	(Output)	V_{out}	-0.5 to +4.6	V
Supply voltage relative to V_{SS}		V_{CC}	-0.5 to +4.6	V
Short circuit output current		I_{out}	50	mA
Power dissipation		P_T	8	W
Operating temperature		T_{opr}	0 to +70	°C
Storage temperature		T_{stg}	-55 to +125	°C

Recommended DC Operating Conditions ($T_a = 0$ to +70°C)

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply voltage	V_{SS}	0	0	0	V	
	V_{CC}	3.0	3.3	3.6	V	1
Input high voltage	V_{IH}	2.0	—	$V_{CC} + 0.3$	V	1
Input low voltage	V_{IL}	-0.3	—	0.8	V	1

Note: 1. All voltage referred to V_{SS} .

HB56TW433D Series

DC Characteristics ($T_a = 0 \text{ to } +70^\circ\text{C}$, $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = 0 \text{ V}$)

		HB56TW433D								
		60 ns		70 ns		80 ns				
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Unit	Test Conditions	Notes
Operating current	I _{CC1}	—	880	—	800	—	720	mA	t _{RC} = min	1, 2
Standby current	I _{CC2}	—	16	—	16	—	16	mA	TTL interface RAS, CAS = V _{IH} Dout = High-Z	
		—	8	—	8	—	8	mA	CMOS interface RAS, CAS ≥ V _{CC} – 0.2 V Dout = High-Z	
Standby current (L-version)	I _{CC2}	—	0.8	—	0.8	—	0.8	mA	CMOS interface RAS, CAS ≥ V _{CC} – 0.2 V Dout = High-Z	
RAS-only refresh current	I _{CC3}	—	880	—	800	—	720	mA	t _{RC} = min	2
Standby current	I _{CC5}	—	40	—	40	—	40	mA	RAS = V _{IH} CAS = V _{IL} Dout = enable	1
CAS before RAS refresh current	I _{CC6}	—	880	—	800	—	720	mA	t _{RC} = min	
First Page mode current	I _{CC7}	—	640	—	560	—	520	mA	t _{PC} = min	1, 3
Battery backup current (Standby with CBR refresh) (L-version)	I _{CC10}	—	2.4	—	2.4	—	2.4	mA	CMOS interface Dout = High-Z CBR refresh: t _{RC} = 62.5 μs t _{RAS} ≤ 0.3 μs	
Self refresh mode current (L-version)	I _{CC11}	—	1.6	—	1.6	—	1.6	mA	CMOS interface RAS, CAS ≤ 0.2 V Dout = High-Z	
Input leakage current	I _I	–10	10	–10	10	–10	10	μA	0 V ≤ Vin ≤ 4.6V	
Output leakage current	I _{LO}	–10	10	–10	10	–10	10	μA	0 V ≤ Vout ≤ 4.6V Dout = disable	
Output high voltage	V _{OH}	2.4	V _{CC}	2.4	V _{CC}	2.4	V _{CC}	V	High Iout = –2 mA	
Output low voltage	V _{OL}	0	0.4	0	0.4	0	0.4	V	Low Iout = 2 mA	

- Notes: 1. I_{CC} depends on output load condition when the device is selected I_{CC} max is specified at the output open condition.
 2. Address can be changed once or less while RAS = V_{IL} .
 3. Address can be changed once or less while CAS = V_{IH} .

HB56TW433D Series

Capacitance ($T_a = 25^\circ\text{C}$, $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$)

Parameter	Symbol	Typ	Max	Unit	Notes
Input capacitance (Address)	C_{I1}	—	68	pF	1
Input capacitance ($\overline{WE}$)	C_{I2}	—	76	pF	1
Input capacitance ($\overline{RAS}$)	C_{I3}	—	43	pF	1
Input capacitance ($\overline{CAS}$)	C_{I4}	—	29	pF	1
I/O capacitance (DQ)	$C_{I/O}$	—	17	pF	1, 2

Notes: 1. Capacitance measured with Boonton Meter or effective capacitance measuring method.

2. $\overline{CAS} = V_{IH}$ to disable Dout.

AC Characteristics

- Refer to the HM51W17400B Series data sheet.
- The HB56TW433D Series writes data only in early write cycle ($t_{WCS} \geq t_{WCS}(\text{min})$).
Delayed write cycle is not available ($\overline{OE}$ pin is fixed to V_{SS}).

