



### Features


- ◇ For IF SAW filter
- ◇ High attenuation
- ◇ Single-ended operation
- ◇ Dual In-line Package
- ◇ RoHS compliant (2002/95/EC), Pb-free

### Specifications


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	119.92	120	120.08
Insertion Loss	dB	-	24.3	26
1 dB Bandwidth	MHz	-	18.84	-
3 dB Bandwidth	MHz	19	19.22	-
40 dB Bandwidth	MHz	-	20.27	-
50 dB Bandwidth	MHz	-	20.41	20.5
Passband Variation	dB	-	0.9	1
Group Delay Variation( $f_0 \pm 9\text{MHz}$ )	nsec	-	80	150
Absolute Delay	usec	-	2.67	-
Ultimate Rejection	dB	50	54	-
Material Temperature coefficient	KHz/°C	-9.84		
Substrate Material	-	128LN		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1		
Package Size	DIP3512 (35.0x12.8x4.7mm <sup>3</sup> )			

#### Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	<b>SIPAT Co., Ltd.</b> ( CETC No.26 Research Institute ) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBN12030	
		Rev. Date	2007-12-21	
		Ver.	1.0	Page


### Matching Configuration

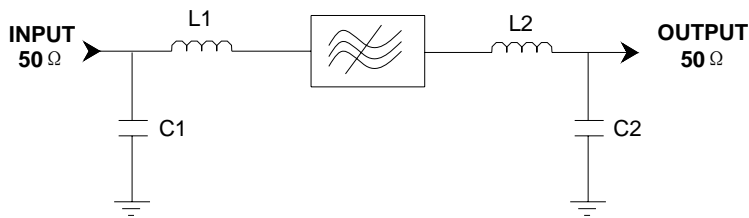

**L1=39nH L2=27nH**  
**C1=C2=15pF**  
**Source/Load Impedance=50 ohm**

Notes - Component values may change depending  
on board layout.

### Package Dimension

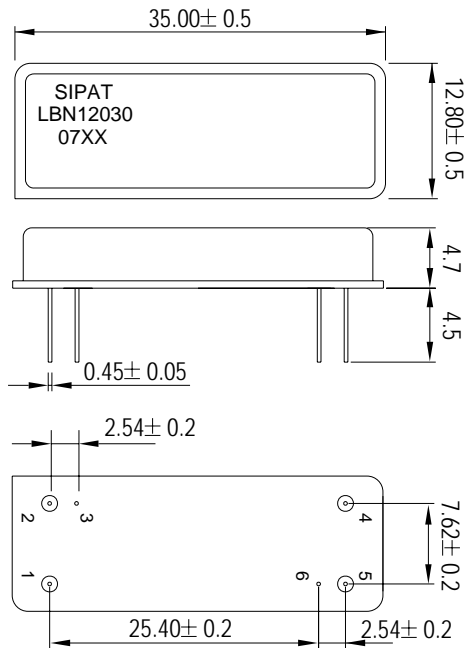

#### Pad Configuration:

Input 1  
Output 5  
Ground All Others

#### Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBN12030: Part Number
- 3) 07XX: Date Code

Package: DIP3512

Unit: mm




**SIPAT Co., Ltd.**  
( CETC No.26 Research Institute )  
#14 Nanping Huayuan Road,  
Chongqing, China, 400060

Part Number	LBN12030	
Rev. Date	2007-12-21	
Ver.	1.0	Page 2/3




Typical Performance

Frequency Respond

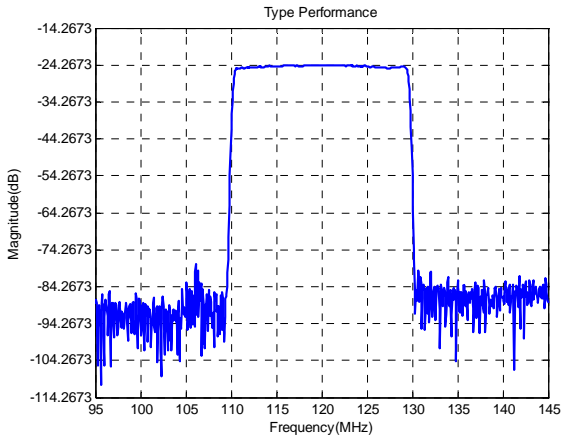


Horizontal: 5MHz/Div Vertical: 10dB/Div

Passband Respond

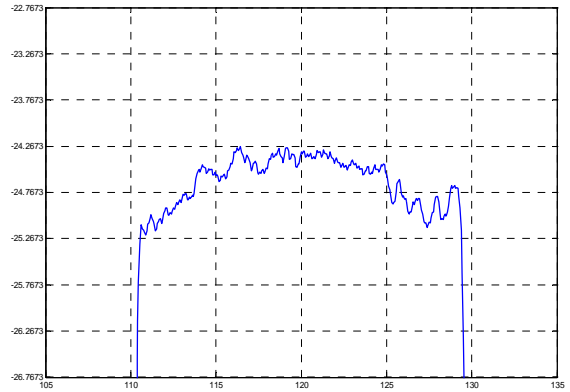


Horizontal: 5MHz/Div Vertical: 0.5dB/Div

Group Delay Variation( $f_0 \pm 9\text{MHz}$ )

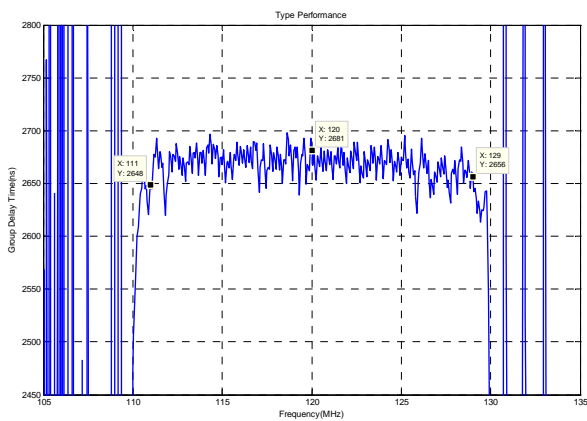


Horizontal: 5MHz/Div Vertical: 50ns/Div

Phase Linearity( $f_0 \pm 9\text{MHz}$ )

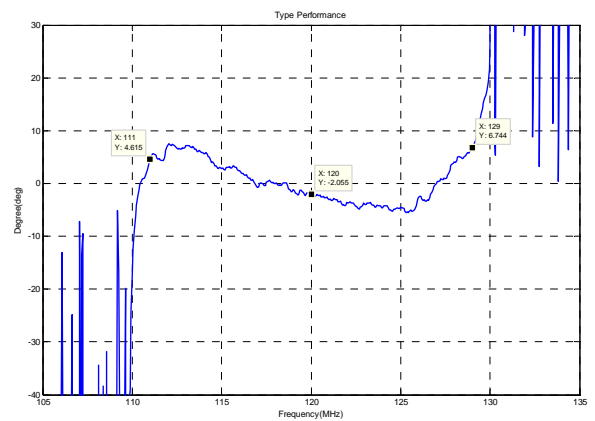


Horizontal: 5MHz/Div Vertical: 10deg/Div

Smith Chart S11

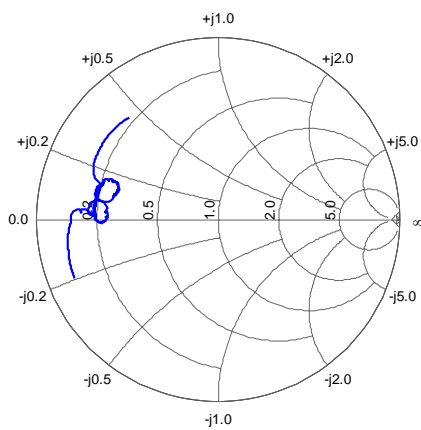

Smith Chart S22

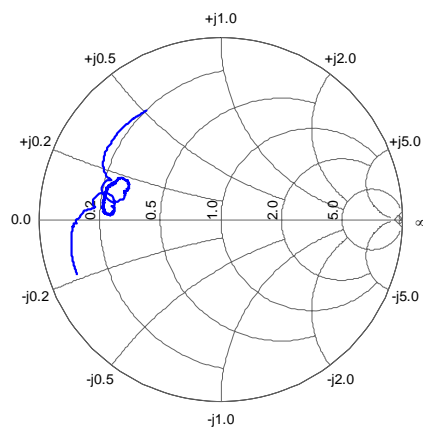

SIPAT Co., Ltd.  
( CETC No.26 Research Institute )  
#14 Nanping Huayuan Road,  
Chongqing, China, 400060

Part Number	LBN12030	
Rev. Date	2007-12-21	
Ver.	1.0	Page 3/3