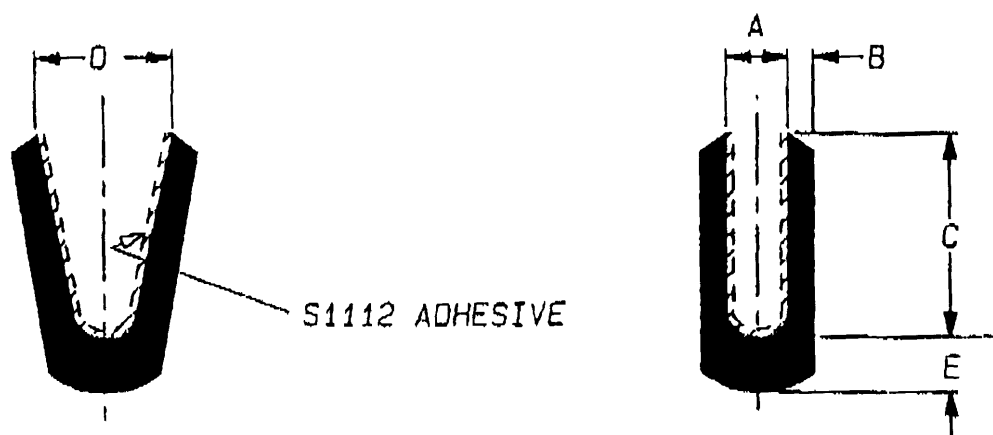


RaychemElectronics OEM
Division - EuropeSpecification
Control Drawing

RAYRIM

a) Supplied profile.

b) Recovered profile.

MATERIAL:

Section: Heat-shrinkable, thermally stabilised, irradiated,
flame retarded Polyolefin.

Adhesive: Raychem hot-melt adhesive S1112

Properties to conform to Raychem Specification RK6182

DIMENSIONS (in millimetres)

PART No.	A	B	C	D	E
	MAX	MIN	MIN	MIN	TYP
	b	b	b	a	b
Nr. 6	0.6	0.5	3.5	0.8	1.25
Nr. 7	1.0	0.9	4.8	1.6	1.25
Nr. 8	2.0	0.9	6.6	2.5	2.25
Nr. 9	4.2	0.9	13.5	4.5	2.20
Nr. 11	1.5	0.8	4.9	1.6	1.35
Nr. 12	3.2	0.8	6.0	5.0	1.15

NOTE.

- 1) Standard supplied length is 1.2 metres.
- 2) Standard colour is black.
- 3) Also available in white.
- 4) "D" Only applicable to unmodified 1.2 metre lengths.

Copyright (!)Urheberrechte

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn A.LILLEY

Checked *[Signature]*

Issue 15

Date May 1998

Conforms to ISO Recommendations

3rd Angle Projection

Not to Scale

Approval
Design

030898

MKTG.

G.A.

