

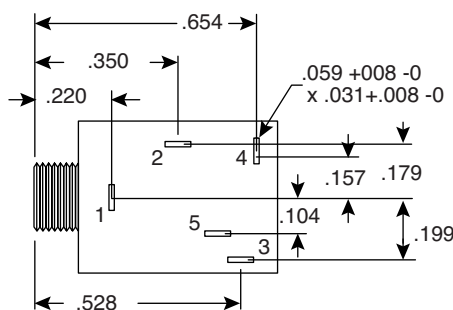
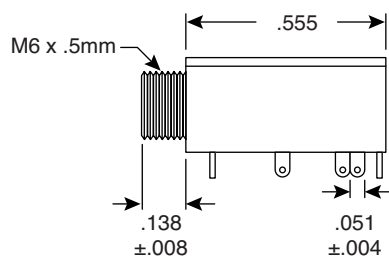




Phone Jack

161-3499

KOBI CONN

Phone Jack



PCB Hole Layout

Dimensions: In.
(except where noted)

SPECIFICATIONS

Type:	hi-rel 3.5mm stereo, PCB mount
Insulation resistance:	100MΩ min. @ 250VDC
Contact resistance:	30mΩ max.
Withstand voltage:	250VAC for 1 minute
Insertion/extraction Force:	.3Kg~1.5Kg
Temperature range:	-10°~+70°C
Life:	10,000 cycles
Soldering temperature:	260°±5°C for 5±1 seconds
Bushing:	nickel plated brass
Body:	Noryl
Cover:	polycarbonate
Terminals:	silver plated brass
Hardware included:	knurled nut

Date Last Revised: 10-15-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300073

161-3499