




Semiconductor Fuse

35-800A, 250 Volts

BIF Document

359

Size

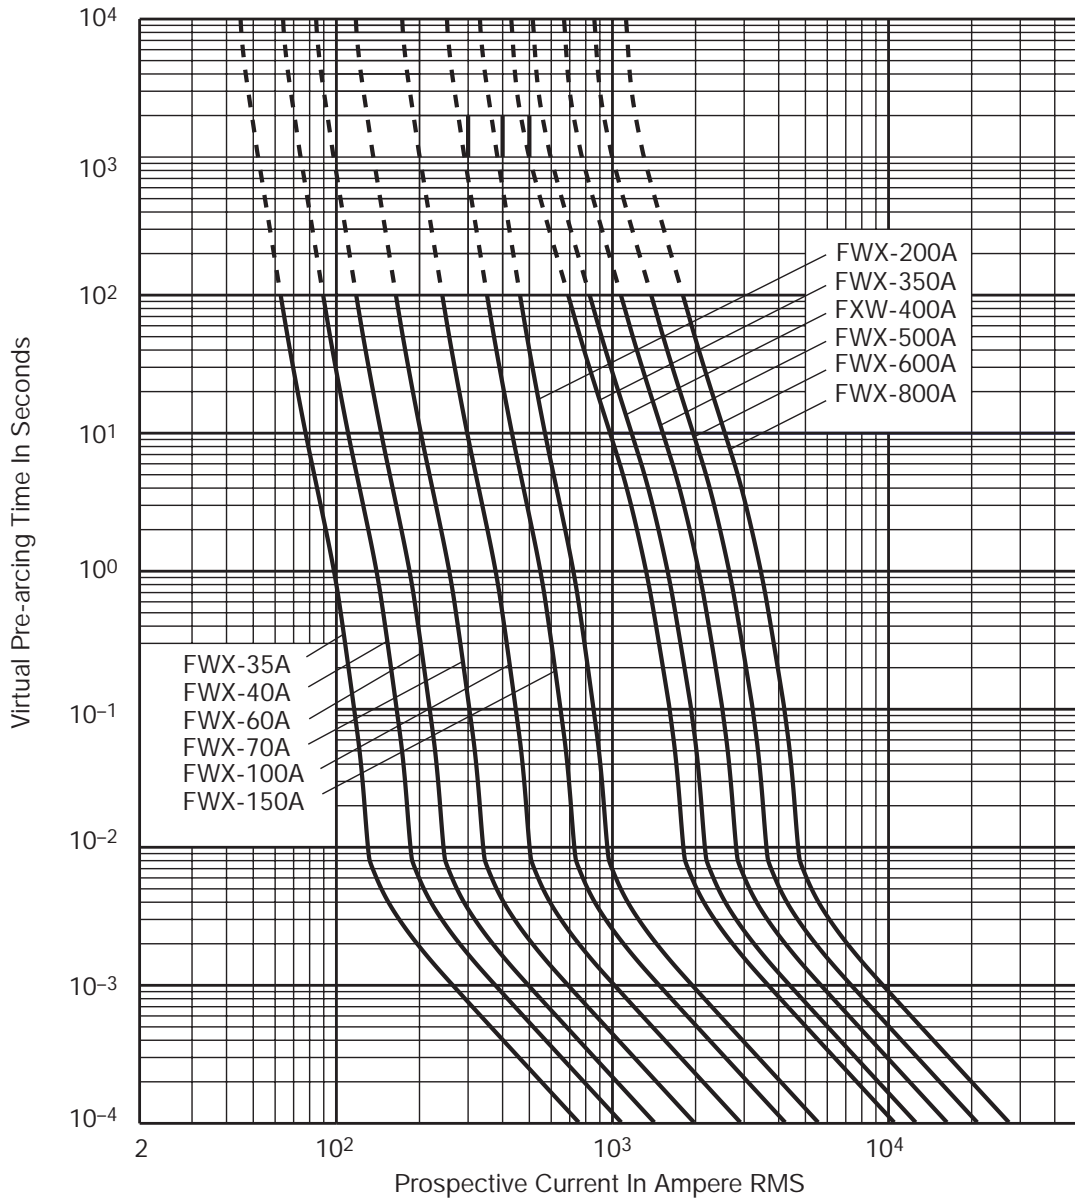

Minimum Melting Time-Current Characteristic Curves
FWX 35A-800A

Approved: **HF** Page **1 of 2**
 Rev. Date: **OCT-97** Pub. Date: **JAN-98**

COOPER Bussmann
 12-28-98
 SB98107 Rev. A

BUSSMANN
 P.O. Box 14460
 St. Louis, MO 63178-4460
 U.S.A.
 Phone: 314-394-2877
 Fax: 800-544-2570
 Int'l Fax: 314-527-1413

BUSSMANN U.K.
 Burton-on-the-Wolds
 Leicestershire LE12 5TH
 England
 Phone: 44-1509-882737
 Fax: 44-1509-882786

BUSSMANN DENMARK
 5 Litterbuen
 DK-2740 Skovlunde
 Copenhagen, Denmark
 Phone: 45-4485-0900
 Fax: 45-4485-0901

Bussmann reserves the right without notice to change design and/or discontinue distribution of this product.




Semiconductor Fuse

35-800A, 250 Volts

BIF Document

353

Size

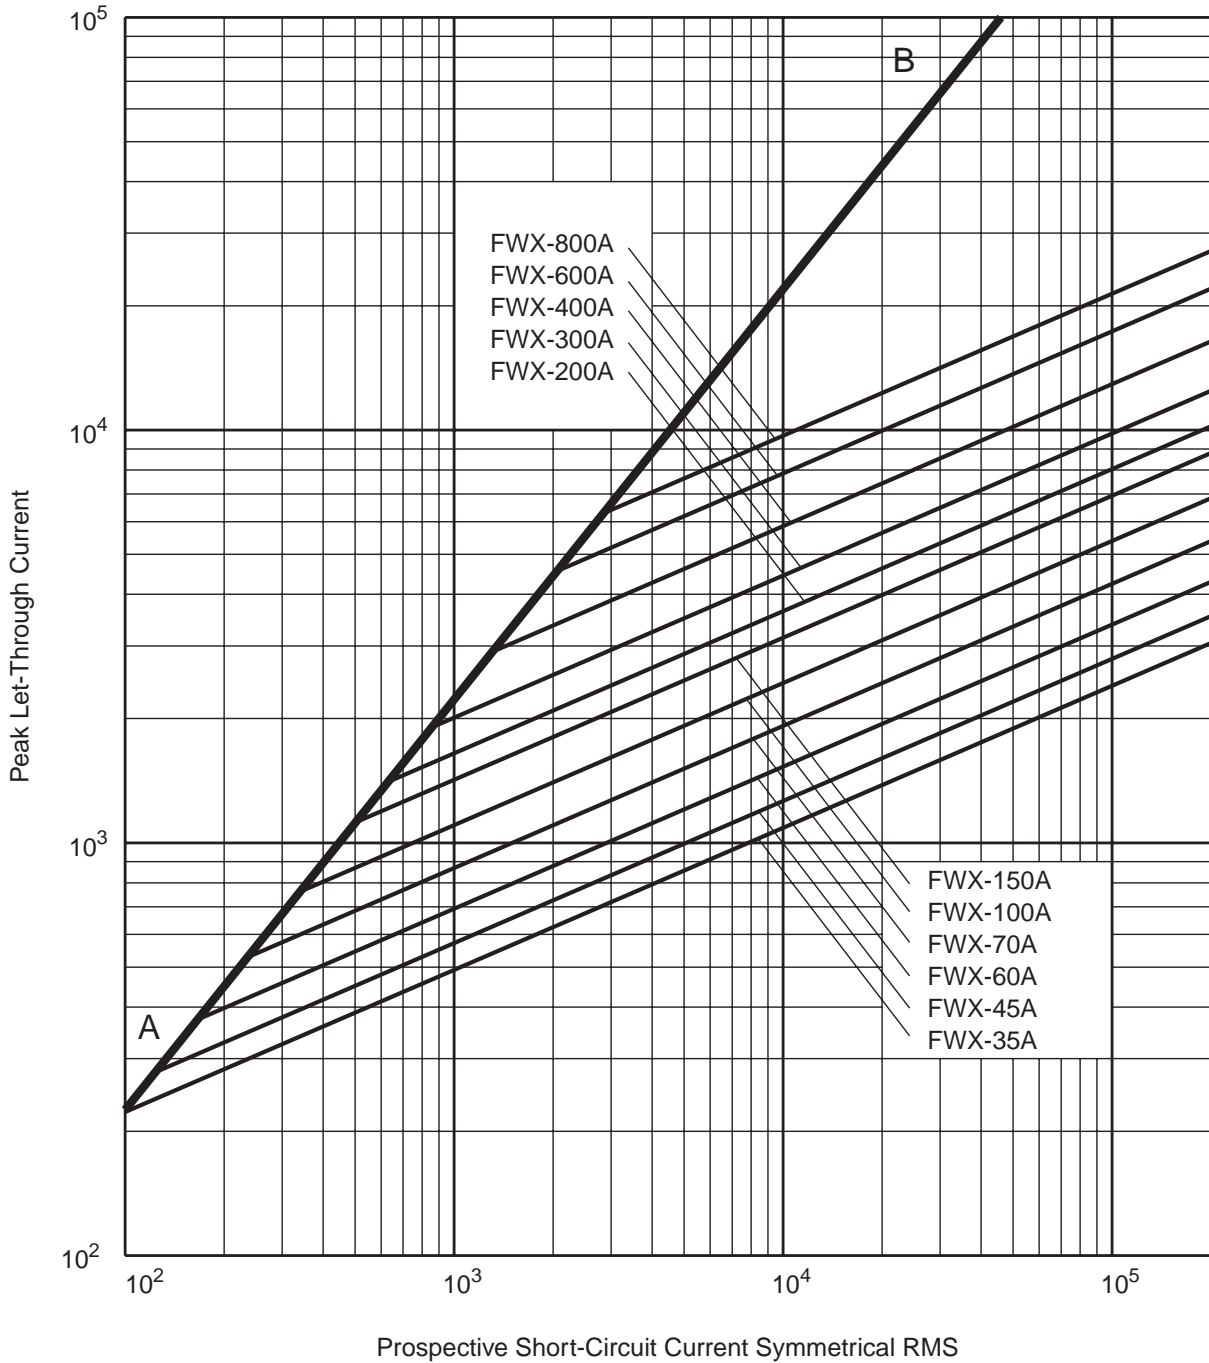

Peak Let-Through Cut-Off Current Characteristic Curves FWX 35A-800A	Approved: _____ JS	Page _____ 2 of 2
	Rev. Date: SEPT-94	Pub. Date: NOV-94