



## COMPACT HIGH INTENSITY LED Downlight



### FEATURES / BENEFITS

- ▲ 1500 lumens white light output in a compact design, ultra high brightness model with 2100 lumen output also available
- ▲ Low profile design - less than 1" high
- ▲ Low voltage operation - 28 VDC +/- 15%
- ▲ Low power consumption – 27 Watts maximum
- ▲ Long life – 50,000 hour lifetime at 70% lumen maintenance
- ▲ Dimming mode activated via push button switch reduces light level to 10% of full brightness in hi/low version or 5-100% on variable dimming version
- ▲ Blackout mode activated via external control reduces light level to 0.1% of full brightness
- ▲ Extremely rugged design, impact and vibration resistant

### APPLICATIONS

- ▲ Military shelters
- ▲ Interior lighting for military vehicles
- ▲ Shipboard lighting
- ▲ General interior illumination where low profile and high light output are required

### OPERATING CHARACTERISTICS

- ▲ Operating temperature range: -40°C to +49°C (-40°F to +120°F)
- ▲ Storage and transit temperature range: -45°C to +71°C (-49°F to +160°F)
- ▲ Cool white light (5000 - 7000K)
- ▲ For optimal performance, light should be mounted to a flat metal surface

### ELECTRICAL SPECIFICATIONS

- ▲ Input voltage range: 28 VDC +/- 15%
- ▲ Nominal power consumption: 22.5W
- ▲ Nominal input current: 0.95A @ 28V input
- ▲ EMI/RFI shielding: Complies with MIL-STD-461E, RE102 & CE102
- ▲ Meets MIL-STD-1474D for operating noise requirements
- ▲ For normal mode (full brightness), connect 28VDC to red wire & ground to black wire
- ▲ For blackout mode, switch 28VDC to grey wire & keep ground to black wire

### MECHANICAL DIMENSIONS

- ▲ 10.750" x 4.750" x 0.625"  
(273.05mm X 120.65mm X 15.88mm)
- ▲ 0.96" [24.38mm] height including control buttons  
Approx. 27 oz (0.76Kg)

### MATERIALS / FINISH

- ▲ Diecast aluminum housing
- ▲ White powder coat finish
- ▲ Vacuum metalized reflector
- ▲ Polycarbonate lens
- ▲ 10" jacketed lead wires with female Molex connector + 24" jacketed extension cable with male Molex connector included

#### Dialight-Lumidrives Ltd.

York House • Wetherby Road • Long Marston, York, YO26 7NH  
Tel: +44(0) 1904 739150 • Fax: +44(0) 1904 737926 • www.dialight.com




#### Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA  
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDTBTCSLX001\_B


# MECHANICAL DRAWINGS

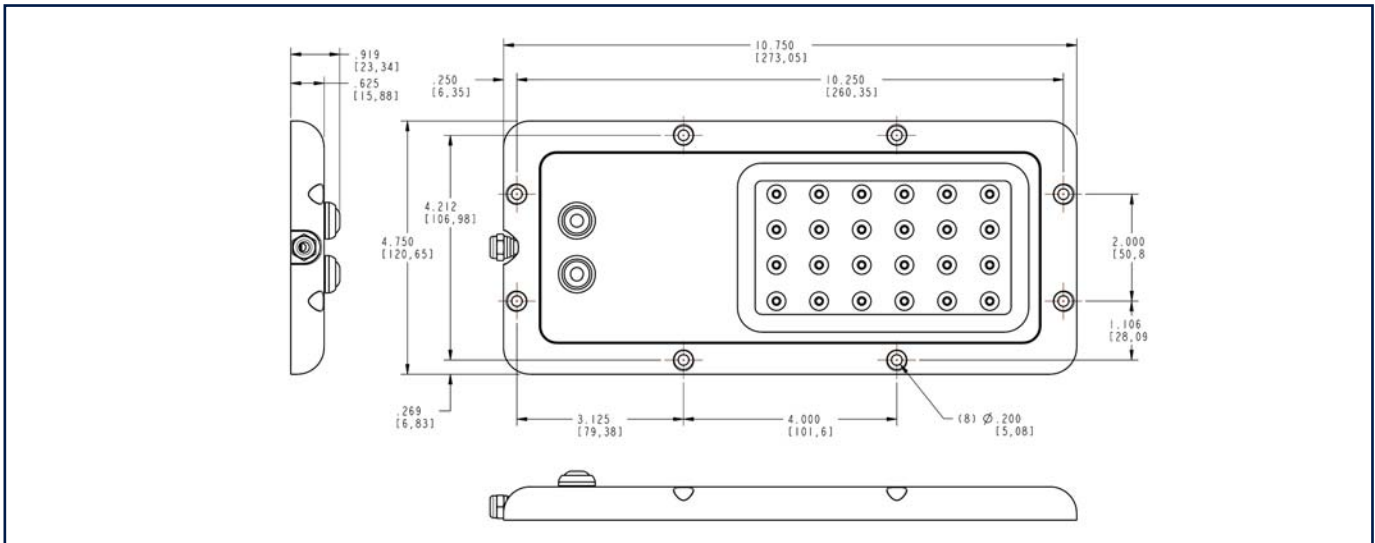

## ORDERING INFORMATION

PART NUMBER	DESCRIPTION	MAX LUMEN OUTPUT
LMC-X27-80A-RLA-D	Spot optic with hi/low dimming	1500 lumens
LMC-W27-24A-RLA-D2	Wide optic with variable dimming	1500 lumens
LMC-W27-24Z-RLA-D2	Wide optic with variable dimming - HB	2100 lumens

## PHOTOMETRIC DATA (SPOT OPTIC VERSION)

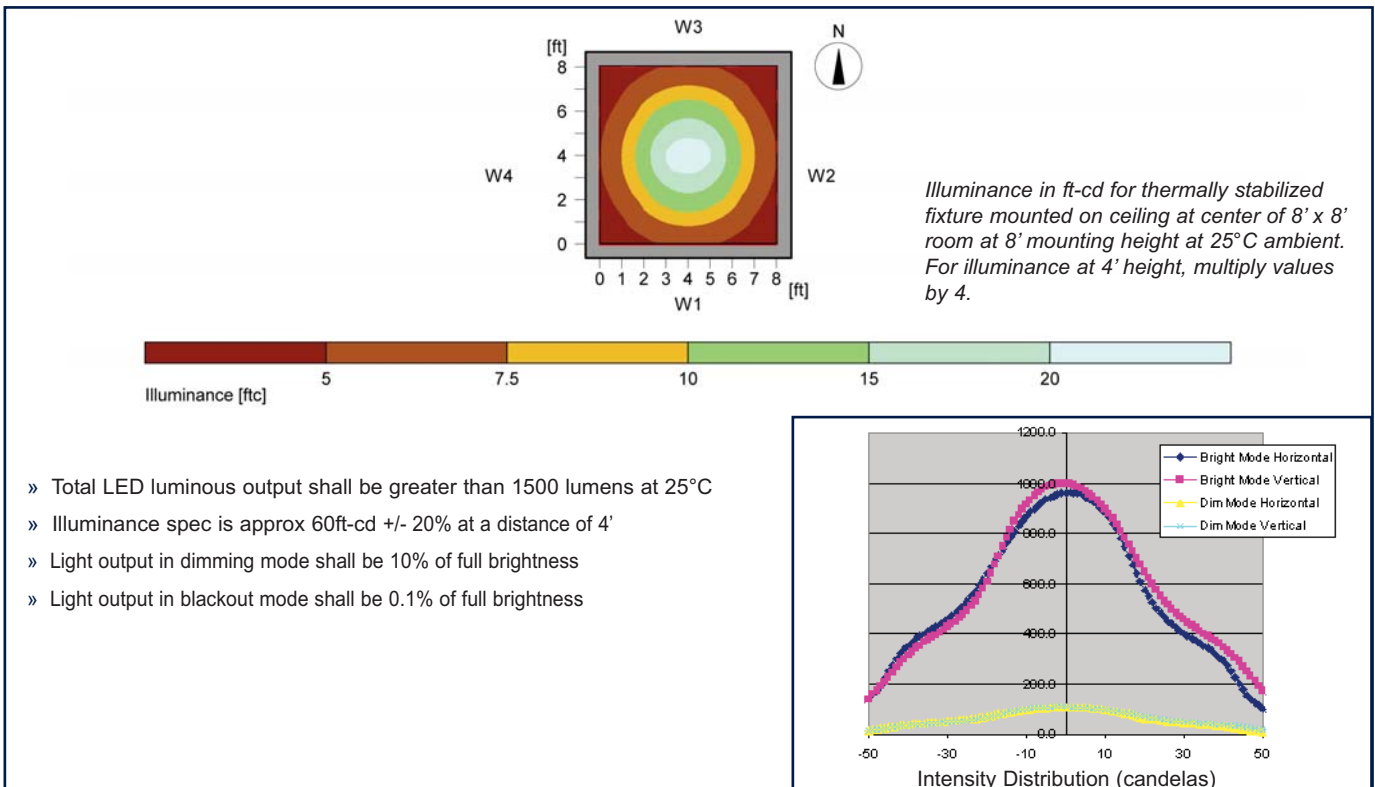

Please consult factory for photometric data on other models.

### Dialight-Lumidrives Ltd.

York House • Wetherby Road • Long Marston, York, YO26 7NH  
 Tel: +44(0) 1904 739150 • Fax: +44(0) 1904 737926 • www.dialight.com



### Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA  
 Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDTBTCSLX001\_B