

***THIS DOCUMENT IS FOR MAINTENANCE  
PURPOSES ONLY AND IS NOT  
RECOMMENDED FOR NEW DESIGNS***

# ZN404 / ZN404D

## 2.45V PRECISION REFERENCE REGULATOR

The ZN404 is a monolithic integrated circuit providing a precise stable reference source of 2.45V without the need for an external shaping capacitor.

### FEATURES

- Low Temperature Coefficient
- Low Slope Resistance
- Very Good Long Term Stability
- Low Noise
- Internally Shaped
- Tight Tolerance
- ZN404 - 2-Lead TO-18 Metal Can Package
- ZN404D - 8-Lead Miniature Plastic Surface Mount Package



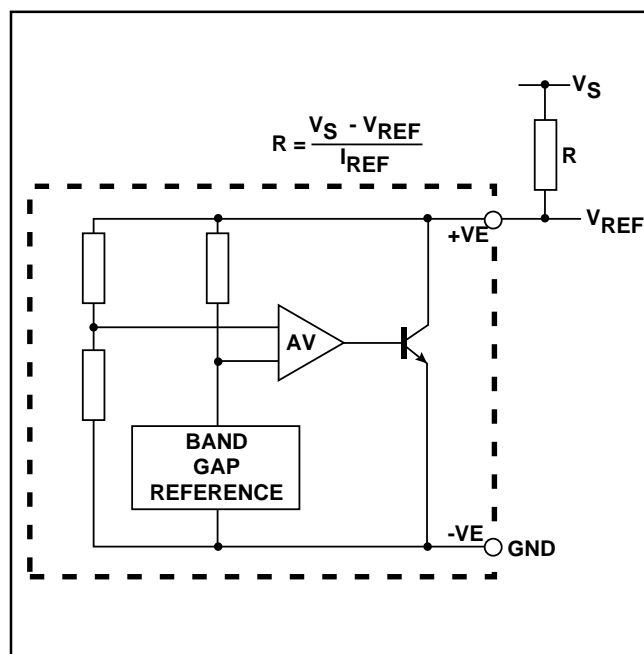


Fig.2 Circuit diagram

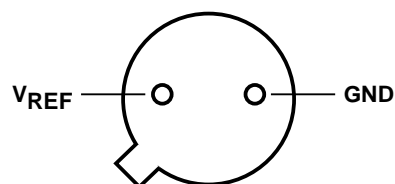

ZN404 (CM2) - BOTTOM VIEW

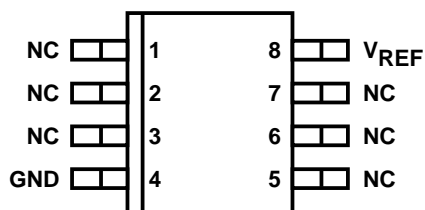

ZN404D (MP8) - TOP VIEW

Fig.1 Pin connections

### ORDERING INFORMATION

Device	Operating Temperature	Package
ZN404	-20°C to +70°C	CM2
ZN404D	-20°C to +70°C	MP8

### ABSOLUTE MAXIMUM RATINGS

Dissipation	300mW
Operating temperature range	
ZN404	-20°C to +70°C
ZN404D	-20°C to +70°C
Storage temperature range	-55°C to +125°C

ELECTRICAL CHARACTERISTICS (at  $T_{amb} = 25^{\circ}\text{C}$  unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Units	Test conditions
Output voltage	$V_{REF}$	2.38	2.45	2.52	V	Measured at 2mA
Slope resistance	$R_{REF}$	-	0.1	0.2	$\Omega$	
Reference current	$I_{REF}$	2.0	-	120	mA	
Maximum change in $V_{REF}$	$\Delta V_{REF}$	-	6	33	mV	-20 to +70°C
RMS noise voltage 1Hz-10kHz			10	-	$\mu\text{V}$	1kHz - 10kHz
$V_{REF}$ drift at 70°C			$\pm 10$	-	ppm/1000 hours	CM2 Package

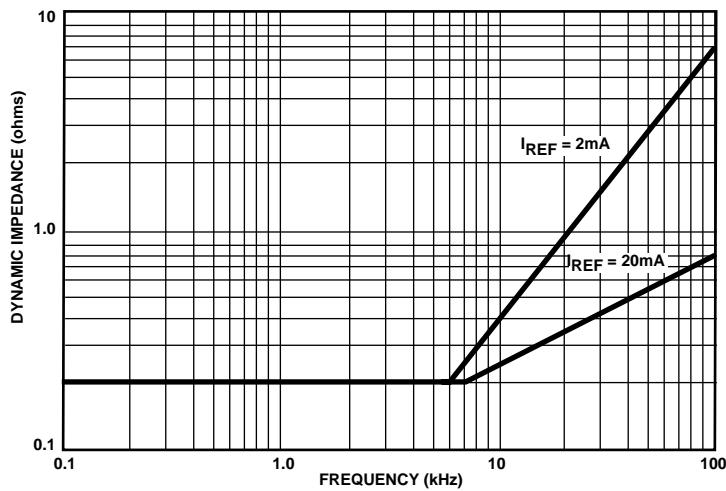


Fig.3 Dynamic impedance

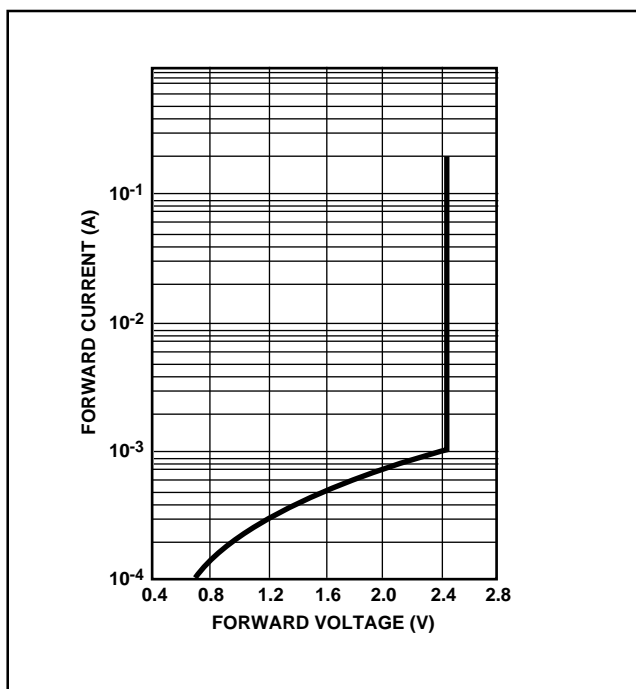


Fig.4 Forward characteristic (typical)

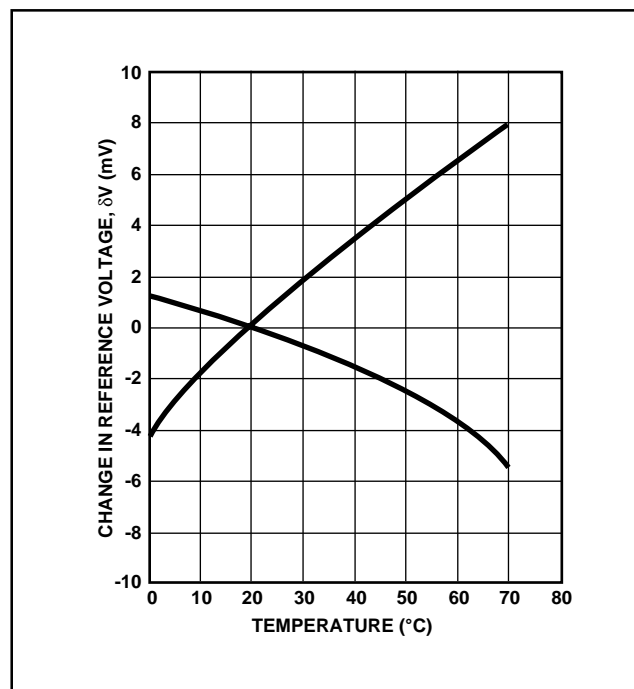


Fig.5 Temperature characteristic (typical)

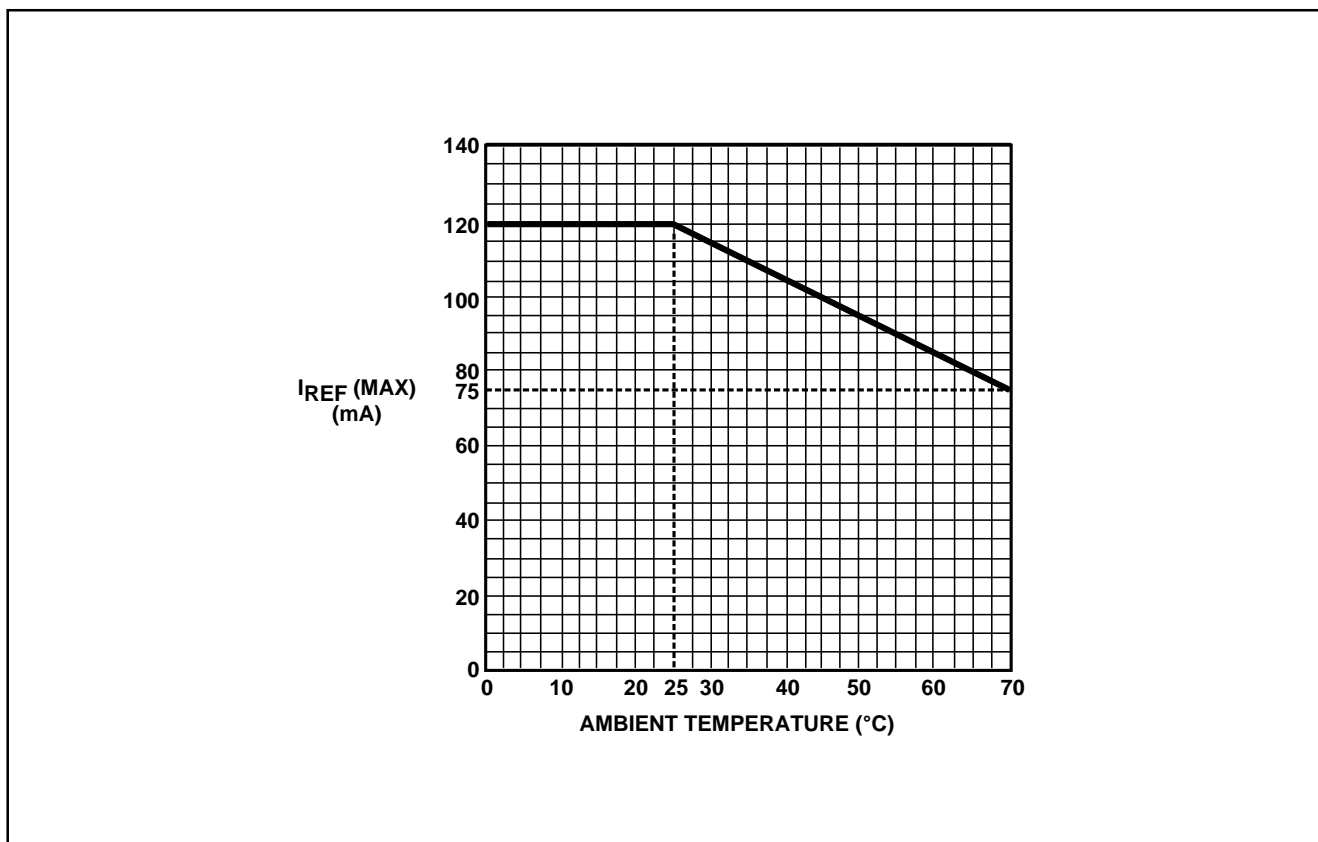


Fig.6 Derating curve



**G E C P L E S S E Y**  
**S E M I C O N D U C T O R S**

**HEADQUARTERS OPERATIONS**

**GEC PLESSEY SEMICONDUCTORS**

Cheney Manor, Swindon,  
Wiltshire SN2 2QW, United Kingdom.  
Tel: (0793) 518000  
Fax: (0793) 518411

**GEC PLESSEY SEMICONDUCTORS**

P.O. Box 660017  
1500 Green Hills Road,  
Scotts Valley, California 95067-0017,  
United States of America.  
Tel: (408) 438 2900  
Fax: (408) 438 5576

**CUSTOMER SERVICE CENTRES**

- **FRANCE & BENELUX** Les Ulis Cedex Tel: (1) 64 46 23 45 Fax : (1) 64 46 06 07
- **GERMANY** Munich Tel: (089) 3609 06-0 Fax : (089) 3609 06-55
- **ITALY** Milan Tel: (02) 66040867 Fax: (02) 66040993
- **JAPAN** Tokyo Tel: (03) 5276-5501 Fax: (03) 5276-5510
- **NORTH AMERICA** Scotts Valley, USA. Tel (408) 438 2900 Fax: (408) 438 7023.
- **SOUTH EAST ASIA** Singapore Tel: (65) 3827708 Fax: (65) 3828872
- **SWEDEN** Stockholm, Tel: 46 8 702 97 70 Fax: 46 8 640 47 36
- **UK, EIRE, DENMARK, FINLAND & NORWAY**  
Swindon Tel: (0793) 518510 Fax : (0793) 518582

These are supported by Agents and Distributors in major countries world-wide.

© GEC Plessey Semiconductors 1994 Publication No. DS3030 Issue No. 2.1 February 1994

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior knowledge the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.