


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
	Sn100%	No	No
LF3	Sn100%	Yes	Yes

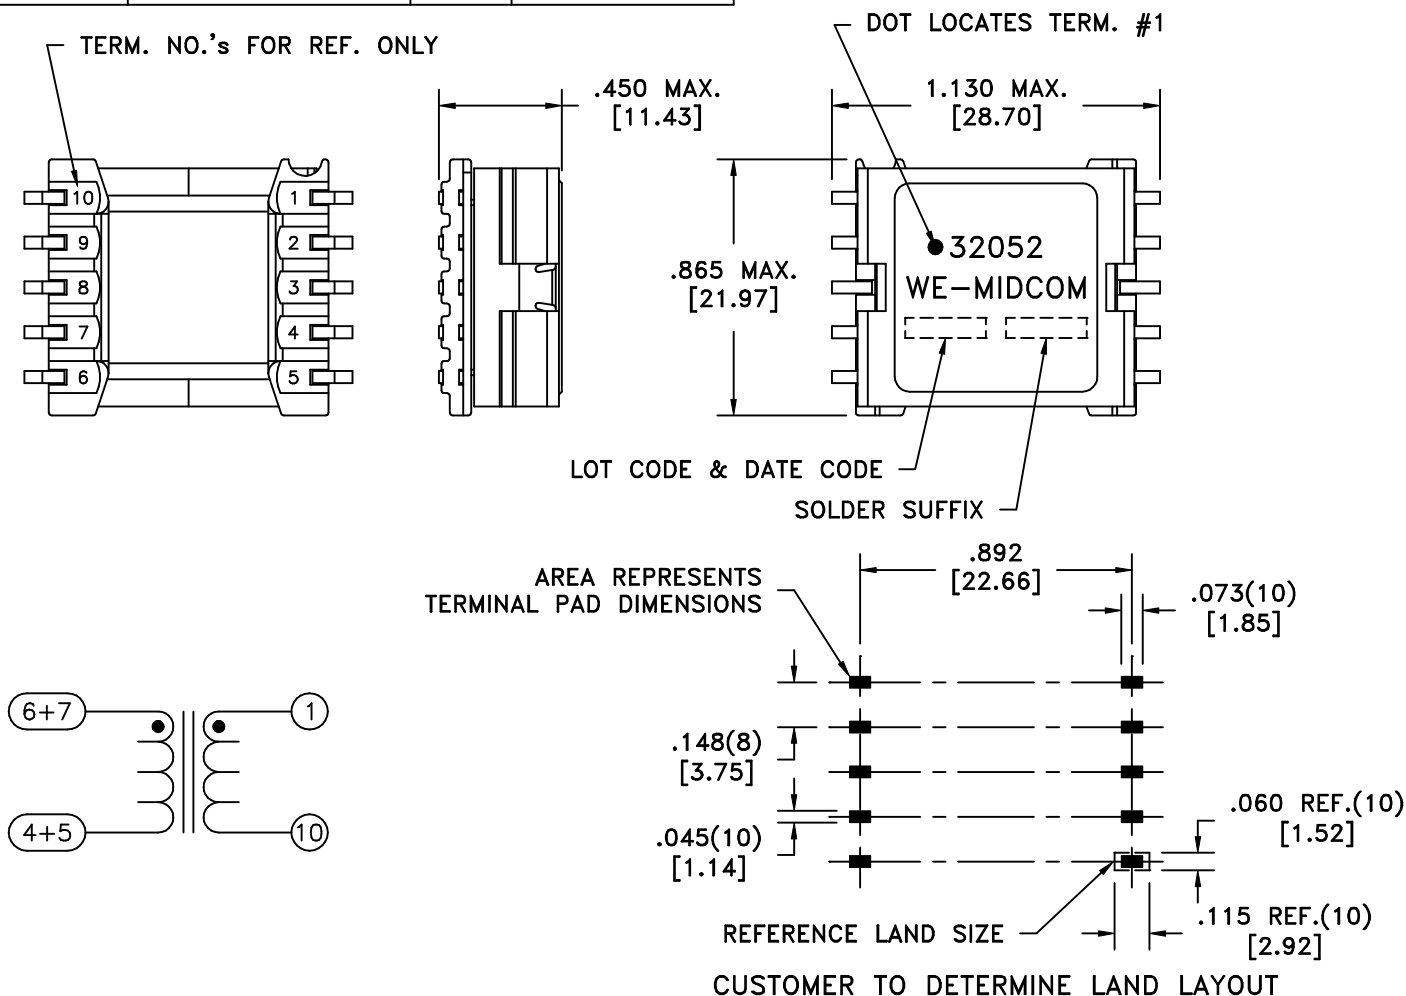

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):	5-6(tie 4+5, 6+7), 0.02 ohms max. 1-10, 1.06 ohms max.
DIELECTRIC RATING:	1000VDC, 1 minute tested by applying 1250VDC for 1 second between 1-6(tie 4+5).
INDUCTANCE:	10.0uH ±10%, 10kHz, 100mVAC, 5-6(tie 4+5, 6+7), Ls.
LEAKAGE INDUCTANCE:	0.3uH max., 100kHz, 10mAAC, 5-6(tie 1+10, 4+5, 6+7), Ls.
URNS RATIO:	(1-10):(6-5) = 10:1, tie(4+5, 6+7), ±2%.

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals:±.005[.13]	DRAWING TITLE		 Midcom www.midcom-inc.com	DWG.# 32052R/-LF3
	TRANSFORMER eiSos p/n:		DRAWING NO. 32052R/-LF3	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		REVISIONS: SEE SHEET 1	SCALE --- SHEET 2 OF 5	REV. 6B 8/06