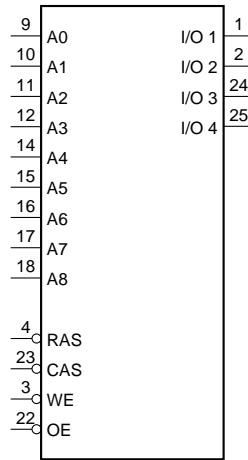
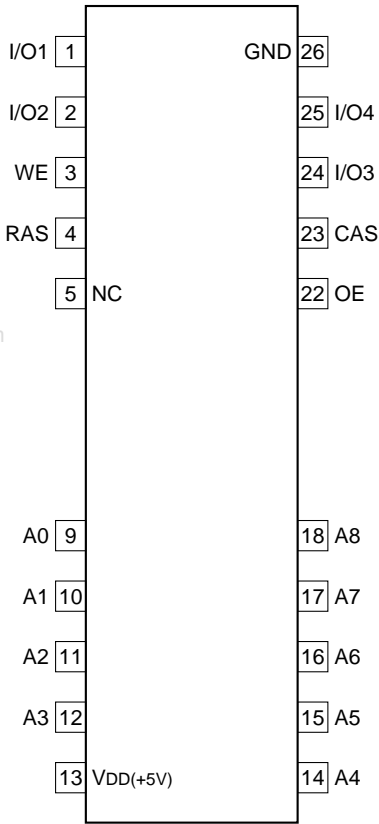

C-MOS 256 4 BITS DYNAMIC RAM
- TOP VIEW -



INPUT

A0 - A8 ; ADDRESS
 RAS ; ROW ADDRESS STROBE
 CAS ; COLUMN ADDRESS STROBE
 WE ; WRITE ENABLE (H : READ, L : WRITE)
 OE ; DATA OUTPUT ENABLE

INPUT/OUTPUT

I/O 1 - I/O 4 ; DATA

