

GJ70L02

N-CHANNEL ENHANCEMENT MODE POWER MOSFET

BVDSS	25V
RDS(ON)	9mΩ
ID	66A

Description

The GJ70L02 provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.




The TO-252 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

Features

- *Simple Drive Requirement

- *Low Gate Charge

- *Fast Switching

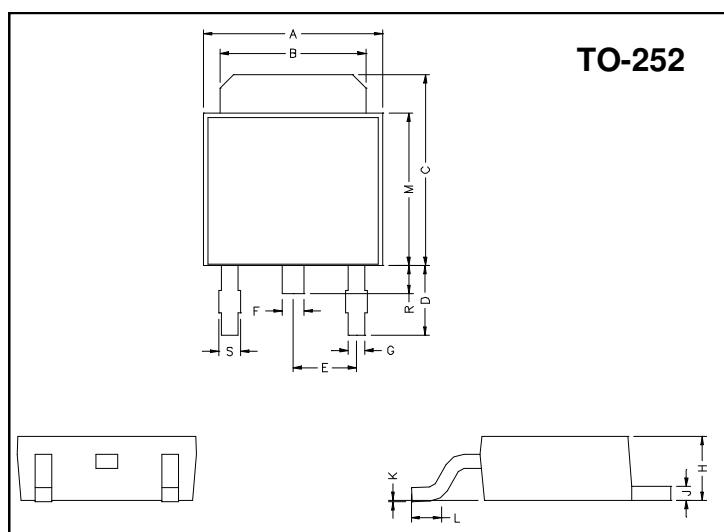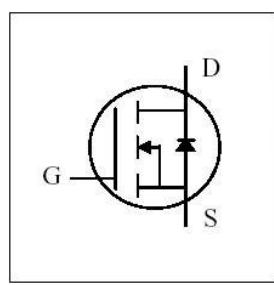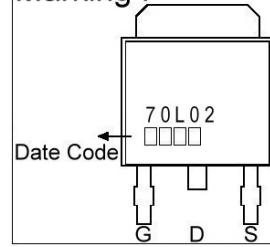Package Dimensions**Marking :**

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.40	6.80	G	0.50	0.70
B	5.20	5.50	H	2.20	2.40
C	6.80	7.20	J	0.45	0.55
D	2.40	3.00	K	0	0.15
E	2.30 REF.		L	0.90	1.50
F	0.70	0.90	M	5.40	5.80
S	0.60	0.90	R	0.80	1.20

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V _{DS}	25	V
Gate-Source Voltage	V _{GS}	±20	V
Continuous Drain Current, V _{GS} @10V	I _D @Tc=25°C	66	A
Continuous Drain Current, V _{GS} @10V	I _D @Tc=100°C	42	A
Pulsed Drain Current ¹	I _{DM}	210	A
Total Power Dissipation	P _D @Tc=25°C	66	W
Linear Derating Factor		0.53	W/°C
Operating Junction and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150	°C

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-case	R _{thj-case}	1.9	°C/W
Thermal Resistance Junction-ambient	R _{thj-amb}	110	°C/W

Electrical Characteristics ($T_j = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Drain-Source Breakdown Voltage	BV_{DSS}	25	-	-	V	$\text{V}_{\text{GS}}=0, \text{I}_D=250\mu\text{A}$
Breakdown Voltage Temperature Coefficient	$\Delta \text{BV}_{\text{DSS}} / \Delta T_j$	-	0.037	-	V/ $^\circ\text{C}$	Reference to 25°C , $\text{I}_D=1\text{mA}$
Gate Threshold Voltage	$\text{V}_{\text{GS}(\text{th})}$	1.0	-	3.0	V	$\text{V}_{\text{DS}}=\text{V}_{\text{GS}}, \text{I}_D=250\mu\text{A}$
Forward Transconductance	g_{fs}	-	28	-	S	$\text{V}_{\text{DS}}=10\text{V}, \text{I}_D=33\text{A}$
Gate-Source Leakage Current	I_{GSS}	-	-	± 100	nA	$\text{V}_{\text{GS}}= \pm 20\text{V}$
Drain-Source Leakage Current($T_j=25^\circ\text{C}$)	I_{DSS}	-	-	1	uA	$\text{V}_{\text{DS}}=25\text{V}, \text{V}_{\text{GS}}=0$
Drain-Source Leakage Current($T_j=150^\circ\text{C}$)		-	-	25	uA	$\text{V}_{\text{DS}}=20\text{V}, \text{V}_{\text{GS}}=0$
Static Drain-Source On-Resistance	$\text{R}_{\text{DS}(\text{ON})}$	-	-	9	m Ω	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_D=33\text{A}$
		-	-	18		$\text{V}_{\text{GS}}=4.5\text{V}, \text{I}_D=20\text{A}$
Total Gate Charge ²	Q_g	-	23	-	nC	$\text{I}_D=33\text{A}$ $\text{V}_{\text{DS}}=20\text{V}$ $\text{V}_{\text{GS}}=5\text{V}$
Gate-Source Charge	Q_{gs}	-	3	-		
Gate-Drain ("Miller") Change	Q_{gd}	-	17	-		
Turn-on Delay Time ²	$\text{T}_{\text{d}(\text{on})}$	-	8.8	-	ns	$\text{V}_{\text{DS}}=15\text{V}$ $\text{I}_D=33\text{A}$ $\text{V}_{\text{GS}}=10\text{V}$ $\text{R}_G=3.3\Omega$ $\text{R}_D=0.45\Omega$
Rise Time	T_r	-	95	-		
Turn-off Delay Time	$\text{T}_{\text{d}(\text{off})}$	-	24	-		
Fall Time	T_f	-	14	-		
Input Capacitance	C_{iss}	-	790	-	pF	$\text{V}_{\text{GS}}=0\text{V}$ $\text{V}_{\text{DS}}=25\text{V}$ $f=1.0\text{MHz}$
Output Capacitance	C_{oss}	-	475	-		
Reverse Transfer Capacitance	C_{rss}	-	195	-		

Source-Drain Diode

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Forward On Voltage ²	V_{SD}	-	-	1.26	V	$\text{I}_S=66\text{A}, \text{V}_{\text{GS}}=0\text{V}, \text{T}_j=25^\circ\text{C}$
Continuous Source Current (Body Diode)	I_S	-	-	66	A	$\text{V}_D=\text{V}_G=0\text{V}, \text{V}_S=1.26\text{V}$
Pulsed Source Current (Body Diode) ¹	I_{SM}	-	-	210	A	

Drain-Source Avalanche Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Single Pulse Avalanche Energy ¹	E_{AS}	-	-	61	mJ	$\text{V}_{\text{DD}}=25\text{V}, \text{I}_D=35\text{A},$ $\text{L}=100\mu\text{H}, \text{V}_{\text{GS}}=10\text{V}$
Avalanche Current	I_{AR}	-	-	35	A	

Notes: 1. Pulse width limited by safe operating area.

2. Pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.

Characteristics Curve

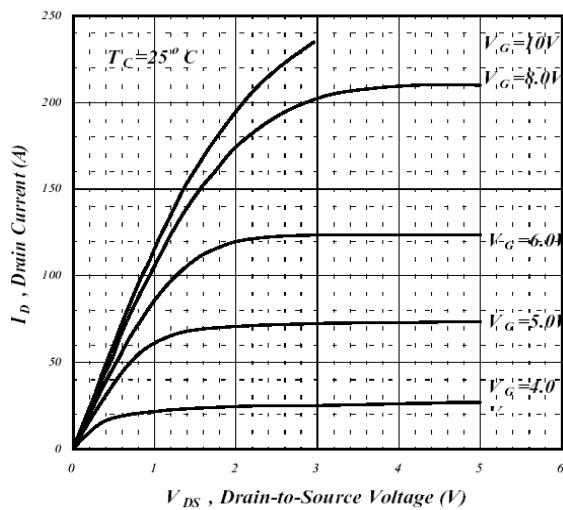


Fig 1. Typical Output Characteristics

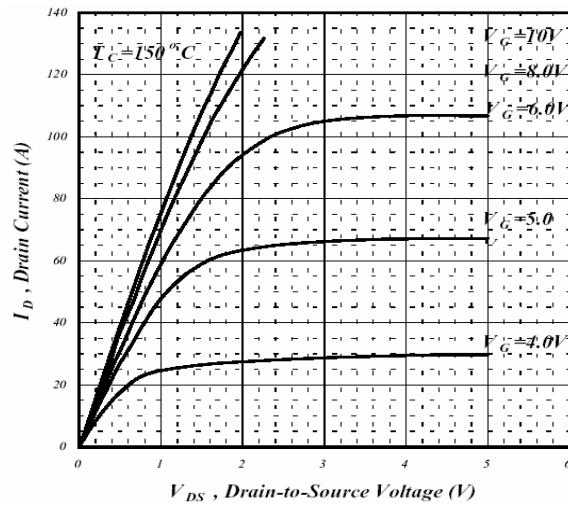


Fig 2. Typical Output Characteristics

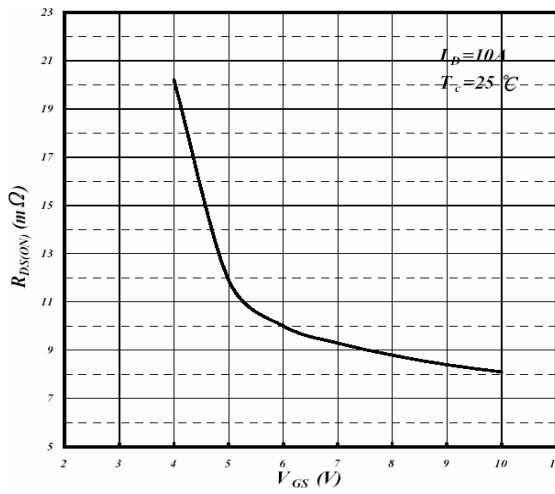


Fig 3. On-Resistance v.s. Gate Voltage

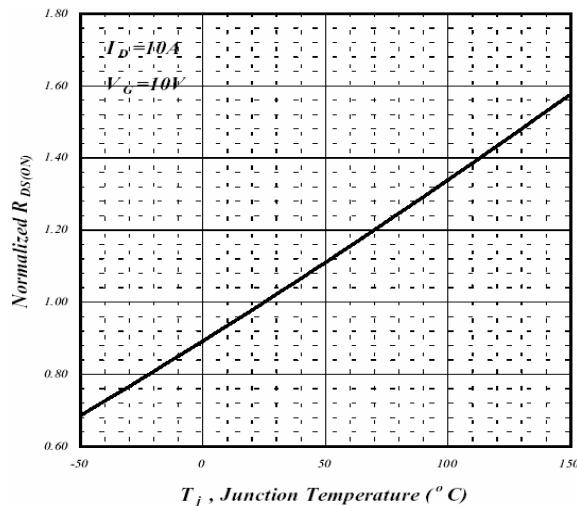


Fig 4. Normalized On-Resistance v.s. Junction Temperature

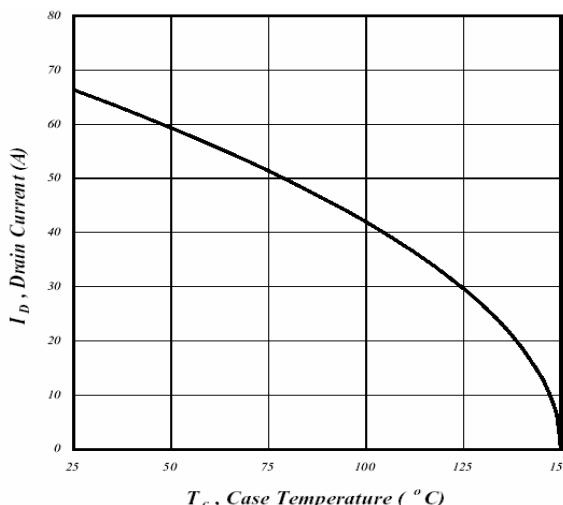


Fig 5. Maximum Drain Current v.s. Case Temperature

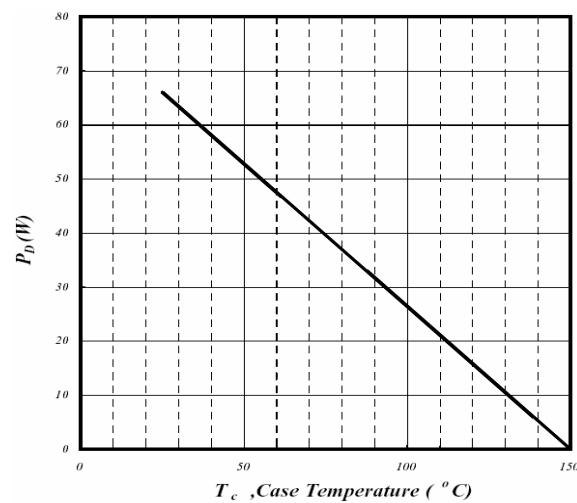
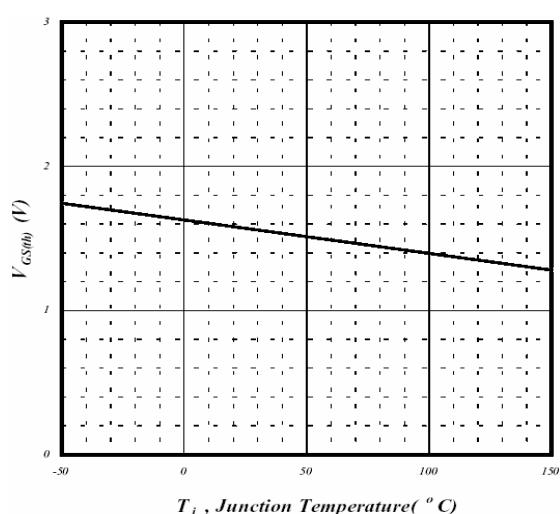
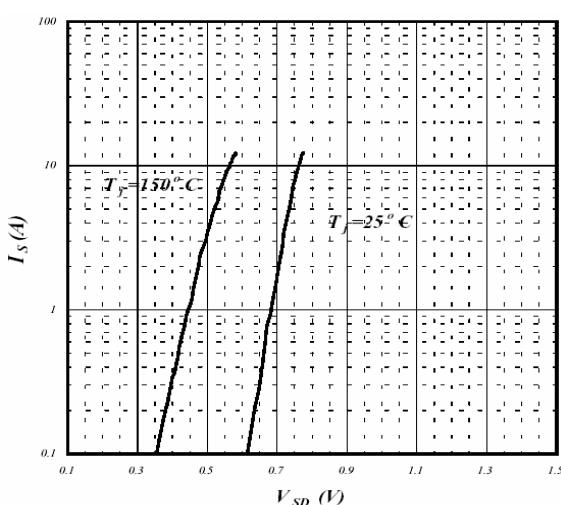
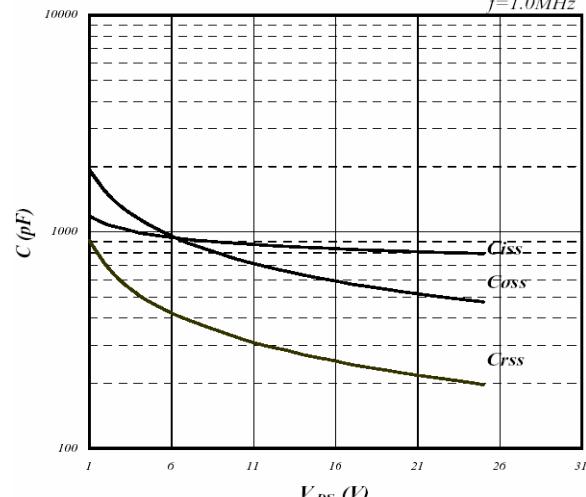
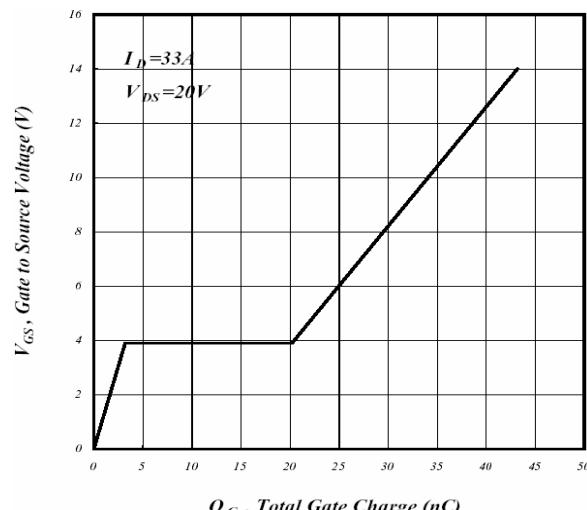
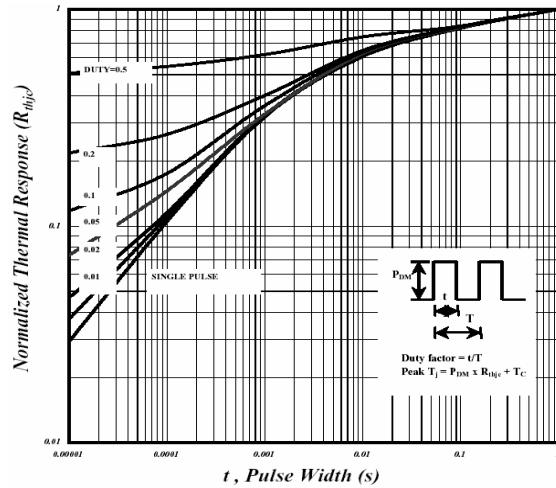
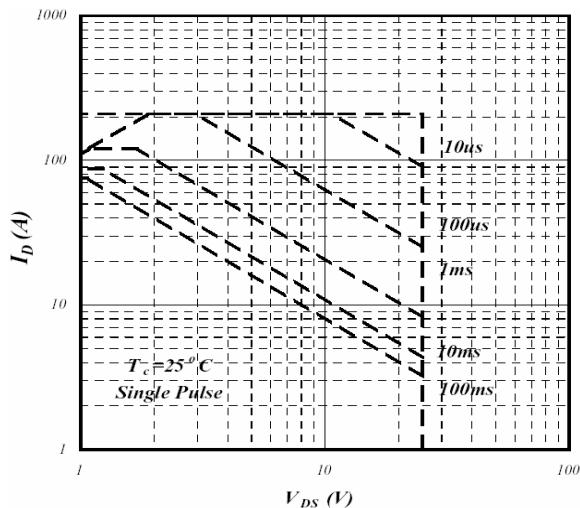


Fig 6. Type Power Dissipation



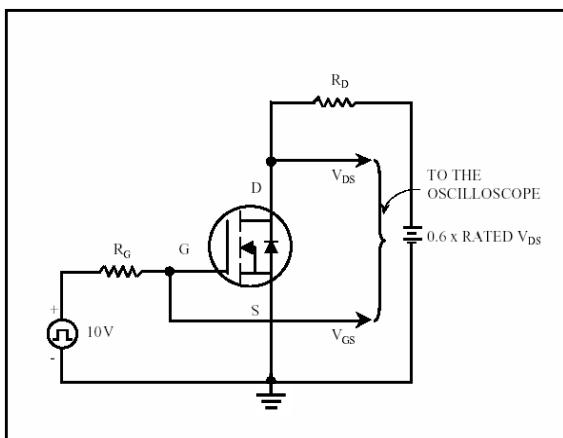


Fig 13. Switching Time Circuit

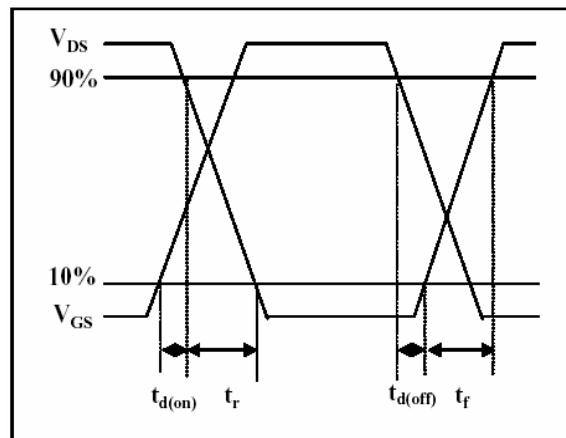


Fig 14. Switching Time Waveform

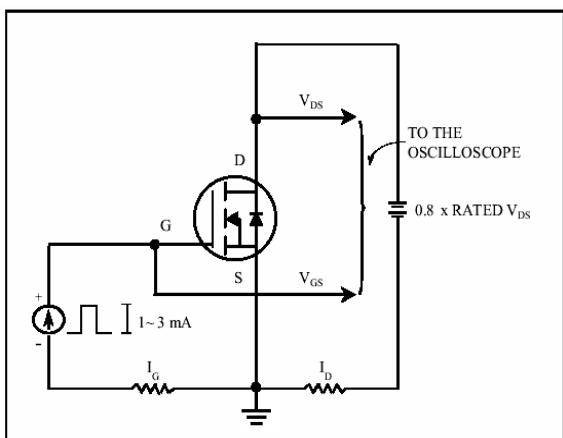


Fig 15. Gate Charge Circuit

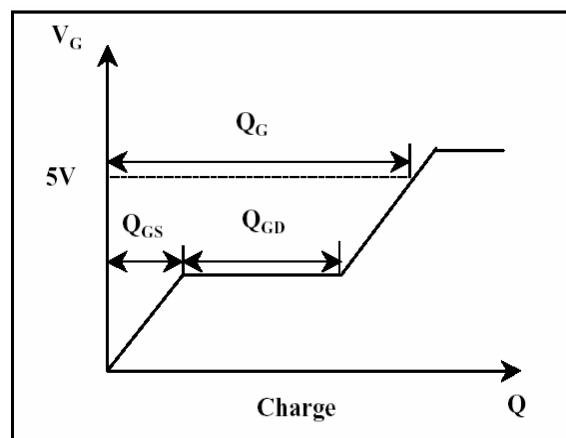


Fig 16. Gate Charge Waveform

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165