


Mini-Trim Delay Lines

SERIES: 1509 & 1509J




Specifications:

- Low cost unit.
- Fits standard DIP sockets.
- Continuously variable.
- 20 Turns approx.
- Resolution: .15 ns.
- Withstanding voltage: 100 Vdc.
- Temperature coefficient: 200 PPM/°C.
- Flat leads (.020 × .010).



Series 1509J



Specifications: Same as 1509, except adjusting screw has 60 turns approximately.
#20 Gauge Leads



Part No.	Total Delay (ns)	Impedance (Ω)	TR (ns)	Rdc (Ω)
SERIES 1509				
1509-05B	5	100	3	.4
1509-20C	20	200	8	1.0
1509-20D	20	250	8	1.0
1509-30F	30	400	10	7.0
1509-40H	40	500	15	13.0
SERIES 1509J				
1509J-10B	10	100	4	.8
1509J-40C	40	200	9	1.5
1509J-40E	40	300	9	6.0
1509J-75F	75	400	16	12.0
1509J-80H	80	500	16	20.0

Contact us for specific requirements. We customize.

SERIES 1509

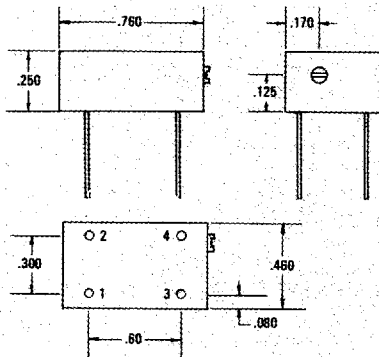

SERIES 1509J

