


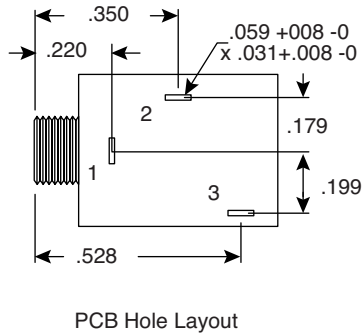
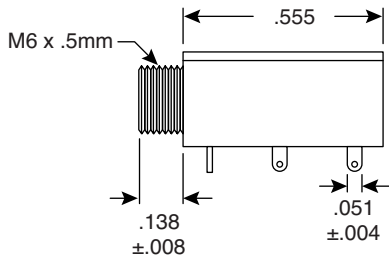



# Phone Jack

161-3501



Phone Jack



Dimensions: In.  
(except where noted)

SPECIFICATIONS	
Type:	hi-rel 3.5mm stereo, PCB mount
Insulation resistance:	100MΩ min. @ 250VDC
Contact resistance:	30mΩ max.
Withstand voltage:	250VAC for 1 minute
Insertion/extraction force:	.3Kg~1.5Kg
Temperature range:	-10°C to +70°C
Life:	10,000 cycles
Soldering temperature:	260°±5°C for 5±1 seconds
Bushing:	nickel plated brass
Body:	Noryl
Cover:	polycarbonate
Terminals:	silver plated brass
Hardware included:	knurled nut

Date Last Revised: 10-19-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-300074

161-3501