



## 1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part number. The complete part number shall be as shown in the following example:

5962-89633	01	X	X
Drawing number	Device type (1.2.1)	Case outline (1.2.2)	Lead finish per MIL-M-38510

1.2.1 Device type. The device type shall identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	HA-5033	Video buffer

1.2.2 Case outlines. The case outlines shall be as designated in appendix C of MIL-M-38510, and as follows:

<u>Outline letter</u>	<u>Case outline</u>
X	See figure 1 (12-lead, .615" x .150"), can package

1.3 Absolute maximum ratings.

Voltage between +V and -V terminals- - - - -	40 V dc
Input voltage- - - - -	Equal to supplies
Peak output current (50 ms on, 1.0 s off)- - - - -	±200 mA
Storage temperature range- - - - -	-65°C to +150°C
Maximum power dissipation (P <sub>D</sub> ) - - - - -	1.2 W
Lead temperature (soldering, 10 seconds) - - - - -	+275°C
Thermal resistance, junction-to-case (θ <sub>JC</sub> ) - - - - -	See MIL-M-38510, appendix C
Thermal resistance, junction-to-ambient (θ <sub>JA</sub> ) - - - - -	82°C/W
Junction temperature (T <sub>J</sub> ) - - - - -	+175°C

1.4 Recommended operating conditions.

Positive supply voltage range (+V) - - - - -	+12 V dc to +15 V dc
Negative supply voltage range (-V) - - - - -	-12 V dc to -15 V dc
Load resistance (R <sub>L</sub> ) - - - - -	100Ω
Ambient temperature range (T <sub>A</sub> ) - - - - -	-55°C to +125°C

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	<b>SIZE</b> <b>A</b>	5962-89633
	<b>REVISION LEVEL</b>	<b>SHEET</b> 2

DESC FORM 193A  
SEP 87

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-549-904

## 2. APPLICABLE DOCUMENTS

2.1 Government specification, standard, and bulletin. Unless otherwise specified, the following specification, standard, and bulletin of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

### SPECIFICATION

#### MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

### STANDARD

#### MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

### BULLETIN

#### MILITARY

MIL-BUL-103 - List of Standardized Military Drawing (SMD's).

(Copies of the specification, standard, and bulletin required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

## 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 2.

3.2.2 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in MIL-BUL-103 (see 6.6 herein).

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89633
		REVISION LEVEL	SHEET 3

DESC FORM 193A  
SEP 87

★ U. S. GOVERNMENT PRINTING OFFICE: 1988-549-904

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/ $-55^{\circ}\text{C} < T_A \leq +125^{\circ}\text{C}$ unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Input offset voltage	$V_{IO}$	$V_{IN} = 0\text{ V}$	1		$\pm 15$	mV
			2, 3		$\pm 25$	
Input bias current	$I_{IB}$	$R_S = 1.0\text{ k}\Omega$	1		$\pm 35$	$\mu\text{A}$
			2, 3		$\pm 50$	
Voltage gain	+A <sub>v1</sub>	$R_L = 100\Omega, V_{IN} = 2.0\text{ V}$	4	0.93		V/V
			5, 6	0.92		
	-A <sub>v1</sub>	$R_L = 100\Omega, V_{IN} = -2.0\text{ V}$	4	0.93		V/V
			5, 6	0.92		
	+A <sub>v2</sub>	$R_L = 1.0\text{ k}\Omega, V_{IN} = 10\text{ V},$ $T_A = +25^{\circ}\text{C}$	4	0.94		V/V
			4	0.94		
	-A <sub>v2</sub>	$R_L = 1.0\text{ k}\Omega, V_{IN} = -10\text{ V},$ $T_A = +25^{\circ}\text{C}$	4	0.94		V/V
			4	0.94		
Output voltage swing	+V <sub>OUT1</sub>	$R_L = 100\Omega, V_{IN} = 12\text{ V}$	1	8.5		V
			2, 3	8.0		
	-V <sub>OUT1</sub>	$R_L = 100\Omega, V_{IN} = -12\text{ V}$	1	-8.5		V
			2, 3	-8.0		

See footnotes at end of table.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89633
		REVISION LEVEL	SHEET 4

DESC FORM 193A  
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1986-749-033

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C < T <sub>A</sub> < +125°C unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Output voltage swing	+V <sub>OUT2</sub>	+V = 15 V, -V = -15 V, R <sub>L</sub> = 1.0 kΩ, V <sub>IN</sub> = 15 V	1, 2, 3	12		V
	-V <sub>OUT2</sub>	+V = 15 V, -V = -15 V, R <sub>L</sub> = 1.0 kΩ, V <sub>IN</sub> = -15 V	1, 2, 3	-12		
Output current	+I <sub>OUT</sub>	V <sub>IN</sub> = 12 V, T <sub>A</sub> = +25°C	1	80		mA
	-I <sub>OUT</sub>	V <sub>IN</sub> = -12 V, T <sub>A</sub> = +25°C	1	-80		
Power supply current	+I <sub>CC</sub>	V <sub>OUT</sub> = 0 V	1, 2, 3		25	mA
	-I <sub>CC</sub>	V <sub>OUT</sub> = 0 V	1, 2, 3		-25	
Power supply rejection ratio	+PSRR	+V = 7.0 V and 17 V, -V = -12 V	1, 2, 3	54		dB
	-PSRR	-V = -7.0 V and -17 V, +V = +12 V	1, 2, 3	54		
Input resistance <u>2/</u>	R <sub>IN</sub>	+V = 15 V, -V = -15 V, T <sub>A</sub> = +25°C V <sub>IN</sub> = 12 V, R <sub>L</sub> = 100Ω	4	1.0		MΩ
Slew rate <u>2/</u>	+SR	+V = 15 V, -V = -15 V, T <sub>A</sub> = +25°C V <sub>OUT</sub> = -5 V to 5 V	7	1.0		V/ns
	-SR	+V = 15 V, -V = -15 V, T <sub>A</sub> = +25°C V <sub>OUT</sub> = 5 V to -5 V	7	1.0		
Full power bandwidth <u>2/</u> <u>3/</u>	FPBW	T <sub>A</sub> = +25°C, V <sub>PK</sub> = 10 V	4	15.9		MHz

See footnotes at end of table.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89633
		REVISION LEVEL	SHEET 5

DESC FORM 193A  
SEP 87

\* U. S. GOVERNMENT PRINTING OFFICE: 1988-548-904

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C < T <sub>A</sub> < +125°C unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Rise time 2/ 4/	t <sub>r</sub>	V <sub>OUT</sub> = 0 V to +200 mV, T <sub>A</sub> = +25°C	9		6.0	ns
Fall time 2/ 4/	t <sub>f</sub>	V <sub>OUT</sub> = 0 V to -200 mV, T <sub>A</sub> = +25°C	9		6.0	ns
Output resistance 2/	R <sub>OUT1</sub>	+V = 15 V, -V = -15 V	4		10	Ω
			5, 6		12	
	R <sub>OUT2</sub>	+V = 15 V, -V = -15 V	4		10	Ω
			5, 6		12	
Quiescent power consumption 2/ 5/	P <sub>C1</sub>	+V = 15 V, -V = -15 V, V <sub>OUT</sub> = 0 V, I <sub>OUT</sub> = 0 mA	1, 2, 3		750	mW
	P <sub>C2</sub>	+V = 12 V, -V = -12 V, V <sub>OUT</sub> = 0 V, I <sub>OUT</sub> = 0 mA	1, 2, 3		600	

1/ +V = +12 V, -V = -12 V, R<sub>S</sub> = 50Ω, R<sub>L</sub> = 1.0 kΩ, C<sub>L</sub> ≤ 10 pF, and V<sub>OUT</sub> = 0 V, unless otherwise specified.

2/ If not tested, shall be guaranteed to the limits specified in table I.

3/ Full power bandwidth =  $\frac{SR}{2\pi V_{PK}}$ .


4/ Rise and fall times measured between 10 percent and 90 percent point.

5/ Quiescent power consumption based on quiescent supply current test maximum (no load on outputs).

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89633
		REVISION LEVEL	SHEET 6

DESC FORM 193A  
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1988-549-904

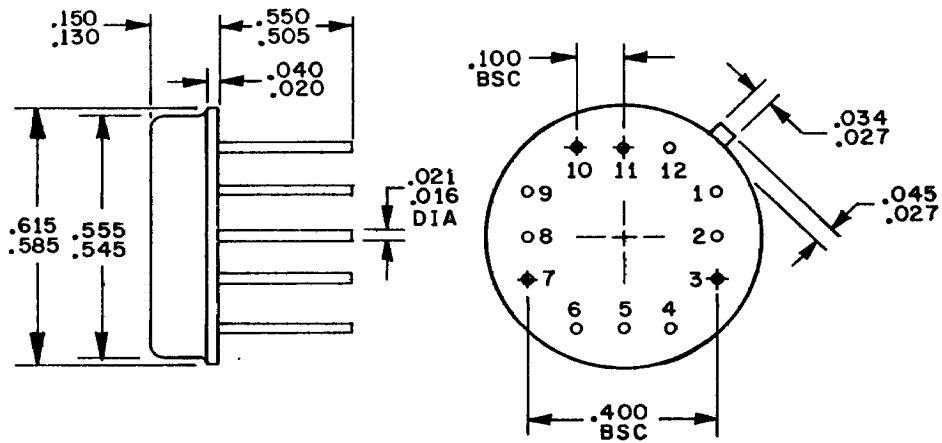

Inches	mm
.016	0.41
.020	0.51
.021	0.53
.027	0.69
.034	0.86
.040	1.02
.045	1.14
.100	2.54
.130	3.30
.150	3.81
.400	10.16
.505	12.83
.545	13.84
.550	13.97
.555	14.10
.585	14.86
.615	15.62

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Pin numbers are for reference only and do not appear on package.

FIGURE 1. Case outline X.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	<b>SIZE</b> <b>A</b>		5962-89633
		<b>REVISION LEVEL</b>	<b>SHEET</b> 7

DESC FORM 193A  
SEP 87

\* U. S. GOVERNMENT PRINTING OFFICE: 1986-549-904

Device type	01
Case outline	X
Terminal number	Terminal symbol
1	NC
2	CASE
3	NC
4	NC
5	+IN
6	NC
7	NC
8	NC
9	NC
10	-V
11	OUT
12	+V

FIGURE 2. Terminal connections.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89633
		REVISION LEVEL	SHEET 8

DESC FORM 193A  
SEP 87

☆ U. S. GOVERNMENT PRINTING OFFICE: 1988-549-904



3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-BUL-103 (see 6.6 herein). The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.9 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

#### 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

- a. Burn-in test, method 1015 of MIL-STD-883.
  - (1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).
  - (2)  $T_A = +125^{\circ}\text{C}$ , minimum.
- b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

##### 4.3.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 8, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

##### 4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
  - (1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).
  - (2)  $T_A = +125^{\circ}\text{C}$ , minimum.
  - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89633
		REVISION LEVEL	SHEET 9

DESC FORM 193A  
SEP 87

☆ U. S. GOVERNMENT PRINTING OFFICE: 1988-549-904

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	---
Final electrical test parameters (method 5004)	1*,2,3,4
Group A test requirements (method 5005)	1,2,3,4,5, 6,7**,9**
Groups C and D end-point electrical parameters (method 5005)	1

\* PDA applies to subgroup 1.

\*\* Subgroups 7 and 9 are guaranteed if not tested.

## 5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

## 6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-481 using DD Form 1693, Engineering Change Proposal (Short Form).

6.4 Record of users. Military and industrial users shall inform Defense Electronics Supply Center when a system application requires configuration control and the applicable SMD. DESC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DESC-ECS, telephone (513) 296-6022.

6.5 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone (513) 296-5375.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89633
		REVISION LEVEL	SHEET 10

DESC FORM 193A  
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1968-549-804

6.6 Approved source of supply. An approved source of supply is listed in MIL-BUL-103. Additional sources will be added to MIL-BUL-103 as they become available. The vendor listed in MIL-BUL-103 has agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DESC-ECS. The approved source listed below is for information purposes only and is current only to the date of the last action of this document.

Military drawing part number	Vendor CAGE number	Vendor similar part number <u>1/</u>
5962-8963301XX	34371	HA2-5033/883

1/ Caution. Do not use this number for item acquisition.  
Items acquired to this number may not satisfy the  
performance requirements of this drawing.

Vendor CAGE  
number

34371

Vendor name  
and address

Harris Semiconductor  
P.O. Box 883  
Melbourne, FL 32901

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89633
		REVISION LEVEL	SHEET 11

DESC FORM 193A  
SEP 87

☆ U. S. GOVERNMENT PRINTING OFFICE: 1988-549-904