



**CONNOR-WINFIELD
CORPORATION**

Aurora, IL. 60505

PHONE (708) 851-4722



FAX (708) 851-5040

CABLE: CONWINWCGO

OSCILLATORS

LOW CURRENT CMOS DIP MODELS C14R5, C15R5, C14R5L & C15R5L

SPECIFICATIONS	C14R5	C15R5	C14R5L	C15R5L
Fixed Frequencies Available	200Hz TO 8MHz		200Hz to 4MHz	
Frequency Tolerance	±.005%	±.01%	±.005%	±.01%
Temperature Range	-25°C TO +75°C	0°C TO +70°C	-25°C TO +75°C	0°C TO +70°C
Output	CMOS Squarewave Duty Cycle 50/50 ±2% TYP			
Supply Voltage	+5 to +15Vdc			
Supply Current	3-20mA		2mA at 5Vdc 15mA at 15Vdc	
Package	All metal,hermetically sealed, welded package.			

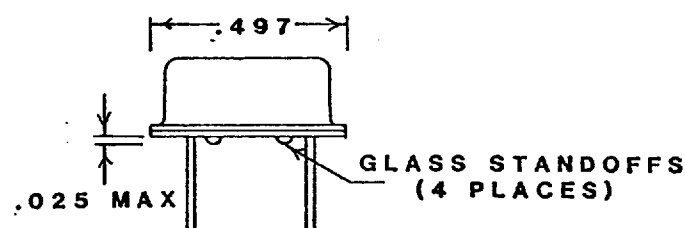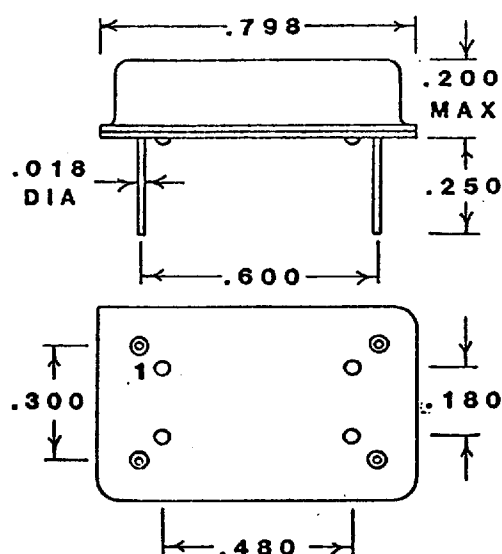

PIN	CONNECTION
1	N/C
7	GROUND
8	OUTPUT
14	(+) SUPPLY

Dimensional Tolerance: ±.005
ALL DIMENSIONS IN INCHES.