
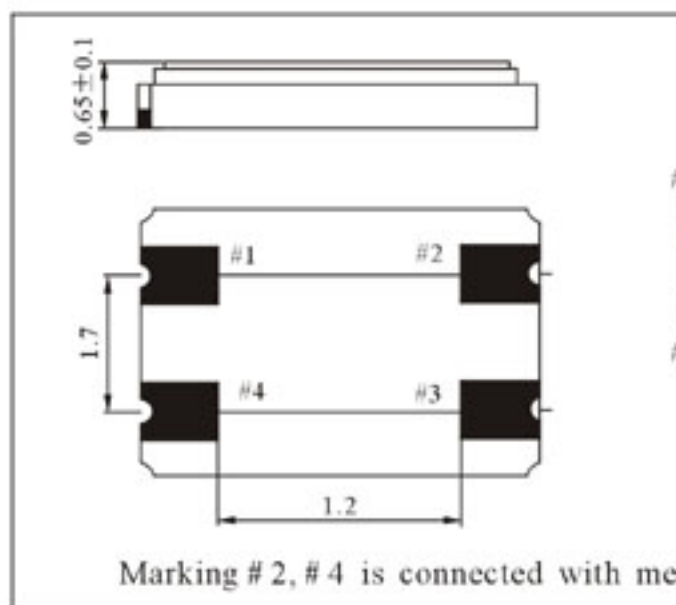


LAND PATTERN LAYOUT (EXAMPLE)

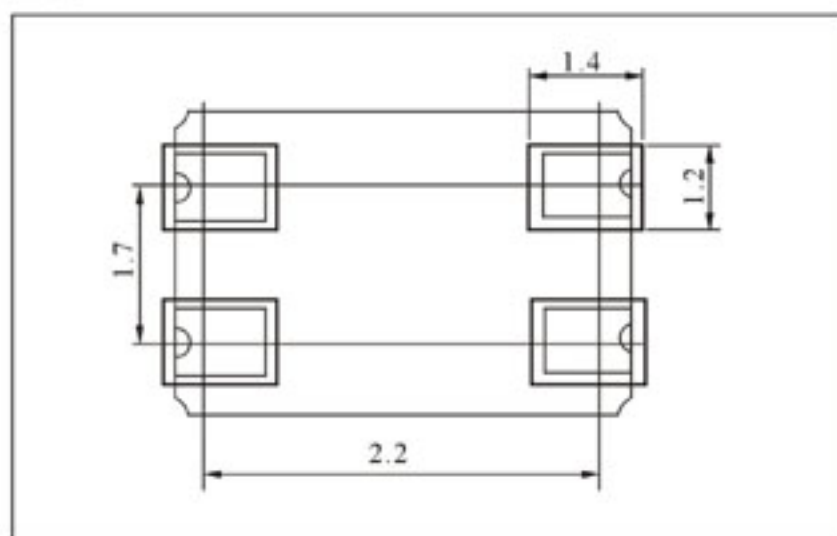

PART NUMBER GUIDE 部件号示例 e.g. FIX24.000M20SM3S (*SM3S=3.2X2.5 SMD S-SEAM TYP)

	Quartz Crystal Resonator 石英晶体谐振器	Frequency 频率	Load Capacitance 负载电容	
FT	X	24.000MHz	20	

PARAMETERS 技术参数

PARAMETERS	参数	SPECIFICATION 规格	
Frequency Range	频率范围	10MHz~ 40MHz	30MHz
Operation Mode	振动模式	Fundamental	Funda
Load Capacitance	负载电容	Series 8pF, 10pF, 12pF	Series 8p
Drive Level	激励电平	10uW(300uW Max)	10uW(3
Frequency Tolerance	频率偏差	±10ppm ~±50 ppm Std.	±10ppm ~
Motional Resistance	谐振电阻	100Ω max	50 Ω
Frequency Stability	频率稳定性	±10, ±15, ±20(Unit:ppm)	±10, ±15,
Operating Temp. Range	工作温度范围	-10°C ~ +60°C	-10 °C
Storage Temp. Range	储存温度范围	-40°C ~ +85°C	-40°C

© All specifications subject change without notice. 规格变化, 恕不另行通知