

# 2224-12L

# 12 Watts, 22 Volts, Class C Microwave 2200 - 2400 MHz

## **GENERAL DESCRIPTION**

The 2224-12L is a Common Base transistor capable of providing 12 Watts Class C, RF Output Power over the band 2200-2400 MHz, The transistor includes double input and output prematching for full broadband capability. Gold Metalization and diffused ballasting are used to provide high reliability and supreme ruggedness.

CASE OUTLINE 55AW Style 1 COMMON BASE

#### ABSOLUTE MAXIMUM RATINGS


Maximum Power Dissipation @ 25°C 44 Watts

**Maximum Voltage and Current** 

Collector to Emitter Voltage (BV<sub>CES</sub>) 45 V Emitter to Base Voltage (BV<sub>EBO</sub>) 3 VCollector Current ( $I_c$ ) 3.0 Amps

**Maximum Temperatures** 

Storage Temperature  $-40 \text{ to } +200 \text{ }^{\circ}\text{C}$ Operating Junction Temperature  $+200 \text{ }^{\circ}\text{C}$ 



### **ELECTRICAL CHARACTERISTICS @ 25°C**

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
P <sub>out</sub>	Power Out	F = 2200-2400 MHz	12			W
$P_{in}$	Power Input	$V_{CC} = 22 \text{ Volts}$			2.25	W
$P_{g}$	Power Gain		7.5			dB
$\eta_{\rm c}$	Collector Efficiency			42		%
VSWR	Load Mismatch Tolerance	Pout = 12 Watts Pk	9:1			

### FUNCTIONAL CHARACTERISTICS @ 25°C

$BV_{CES}$	Collector to Base Breakdown	Ic = 50  mA	45		V
$BV_{EBO}$	Emitter to Base Breakdown	Ie = 10  mA	3.0		V
$h_{FE}$	DC – Current Gain	Vce = 5V, $Ic = 1A$	15	100	
$C_{OB}$	Output Capacitance*	Vcb = 28v, F = 1MHz			
θјс	Thermal Resistance	$Tc = 25^{\circ}C$		4.0	°C/W


<sup>\*</sup>Not measureable due to internal prematch network




# Typical Performance

2224-12L


## **BROADBAND POWER OUTPUT (Typical)**

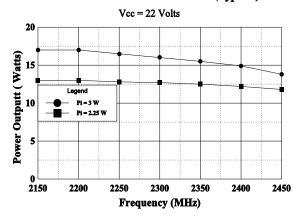

## INPUT IMPEDANCE

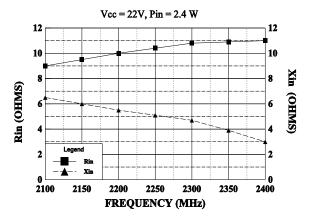


### **COLLECTOR LOAD IMPEDANCE**

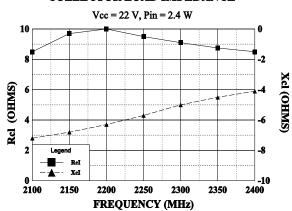


August 1996



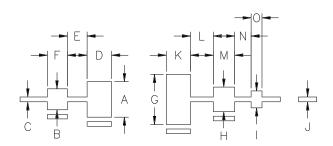

DIM	INCHES	
Α	.390	
В	.230	
С	.054	
D	.270	
Ε	.215	
F	.220	
G	.550	
Н	.270	
I	.185	
J	.054	
K	.265	
L	.250	
М	.235	
N	N .180	
0 .120		

# 2224-12L TEST CIRCUIT

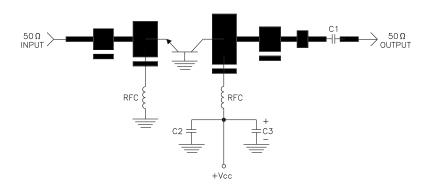

DIELECTRIC = 20 MIL THICK TFE Er = 2.55 C1, C2 = 62pF CHIP ATC "B" C3 = 10 MFD @ 35V RFC = 4 turns #22 wire 1/16" I.D.



cage OPJR2	DWG NO.	2224-12L	REV $f A$	
	SCALE	1/1	SHEET	