



**Materials and Finish**


Housing: PBT UL 94V-0  
 Color: Black  
 Barrel: Brass  
 Plating: Nickel Plated  
 Terminals: Brass  
 Plating: Tin Plated  
 ground pin: Nickel Plated  
 Operating Temp:  
 -25°C to +70°C

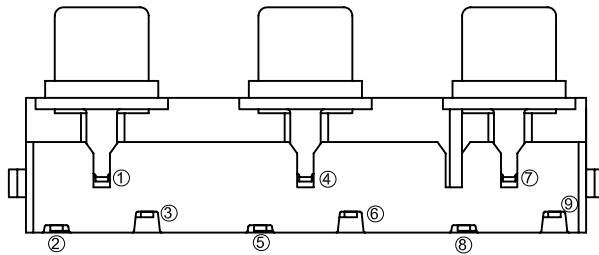

Recommended PCB Layout  
(Top View)

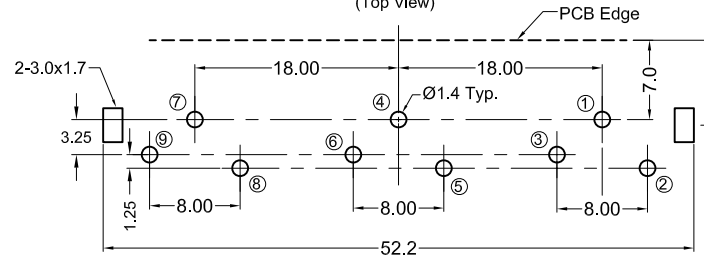

Part Number	Jack Color A	Jack Color B	Jack Color A1	Jack Color B1	Jack Color A2	Jack Color B2
KLP42X-62-BY/R/Y/WY	black	yellow	red	yellow	white	yellow
KLP42X-62-RR/WW/YY	red	red	white	white	yellow	yellow
KLP42X-62-RW/RW/RW	red	white	red	white	red	white
KLP42X-62-RW/RW/YY	red	white	red	white	yellow	yellow
KLP42X-62-WR/WR/WR	white	red	white	red	white	red
KLP42X-62-WW/RR/YY	white	white	red	red	yellow	yellow
KLP42X-62-YY/YY/YY	yellow	yellow	yellow	yellow	yellow	yellow
KLP42X-62RR/WG/YBL	red	red	white	green	yellow	blue
KLP42X62RR/BLW/GY	red	red	blue	white	green	yellow
KLP42X62RR/GG/BLBL	red	red	green	green	blue	blue

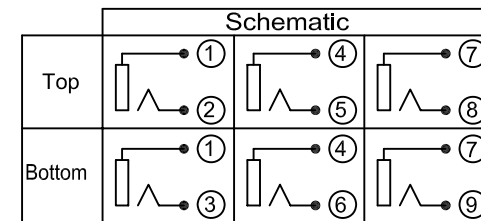

**RoHS COMPLIANT**  
EU Directive 2002/95/EC

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A2	3/28/06	Release Drawing	H. MA	N/A	R. Aguirre	12/02/05
A3	4/26/06	ECO#06-030	H. MA	C. Furumasu		
A4	9/21/06	Add more option	H. MA	C. Furumasu		
A5	10/26/06	Add more option	R. Aguirre	H. MA		
A6	03/12/08	ECO #08-020	R. Aguirre	H. Ma	UNITS	mm
A7	06/07/10	Add Dim	S. Vien	H. MA		

**KLP42X-62-xx/xx/xx**

Stacked RCA Jack ,RoHS Compliant  
 6 Jacks, Right Angle PCB Mount

