
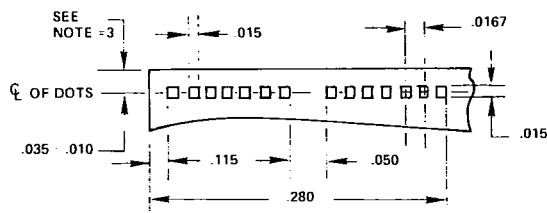


DM214-002 DOTHEAD

The DM214-002 contains two groups of seven dots on 0.0167" centers with a 0.050" gap between the two groups. It is used to add two rows of 5 x 7 dot matrix characters to a graphics printout such as an EKG trace or barcode label. Electrically, all information contained on the data-sheet for the standard DL110-36x12 ten dot standard unit applies to the DM214.

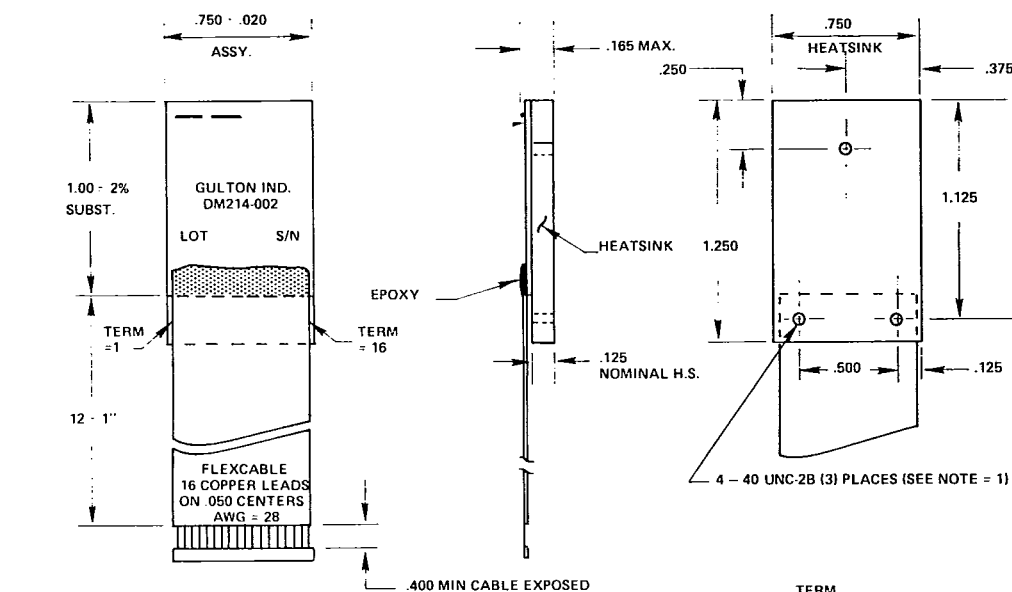

TERM NO.	FUNCTION
1	DOT 1
2	DOT 2
3	DOT 3
4	DOT 4
5	DOT 5
6	DOT 6
7	DOT 7
8	COMM 1
9	DOT 8
10	DOT 9
11	DOT 10
12	DOT 11
13	DOT 12
14	DOT 13
15	DOT 14
16	COMM 2

- NOTES:
1. CAUTION: PENETRATION OF SCREW INTO THE HEATSINK SHOULD NOT EXCEED .115" AT THE RISK OF CRACKING SUBSTRATE.
 2. PRINTING VOLTAGE 23 - 2V @ 10 MSEC.
 3. AS MEASURED TO EDGE OF ASSEMBLY.
 4. AVERAGE RESISTANCE 360 Ω.