

### POWER MANAGEMENT

#### Description

The EZ1117 series of high performance positive voltage regulators are designed for use in applications requiring low dropout performance at up to 0.8A (1A for EZ1117A).

Additionally, the EZ1117 series provides excellent regulation over variations in line, load and temperature. Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device.

The EZ1117 series of three terminal regulators offer fixed and adjustable voltage options available in the space saving SOT-223 and TO-263 packages.

#### Features


- ◆ Low dropout performance: 1.2V max. for EZ1117, 1.3V max. for EZ1117A
- ◆ Full current rating over line and temperature
- ◆ Fast transient response
- ◆  $\pm 2\%$  total output regulation over line, load and temperature
- ◆ Adjust pin current max 90 $\mu$ A over temperature
- ◆ Fixed/adjustable output voltage
- ◆ Line regulation 0.2% max.
- ◆ Load regulation 0.4% max.
- ◆ SOT-223 and TO-263 packages

#### Applications


- ◆ Low voltage microcontrollers
- ◆ Switching power supply post-regulation

### Typical Application Circuit

#### Fixed Voltage Regulator

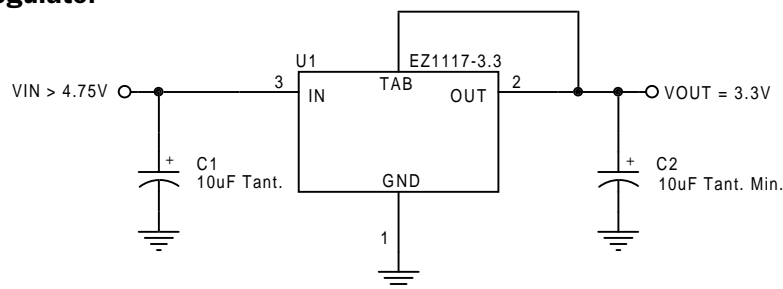

#### Adjustable Voltage Regulator

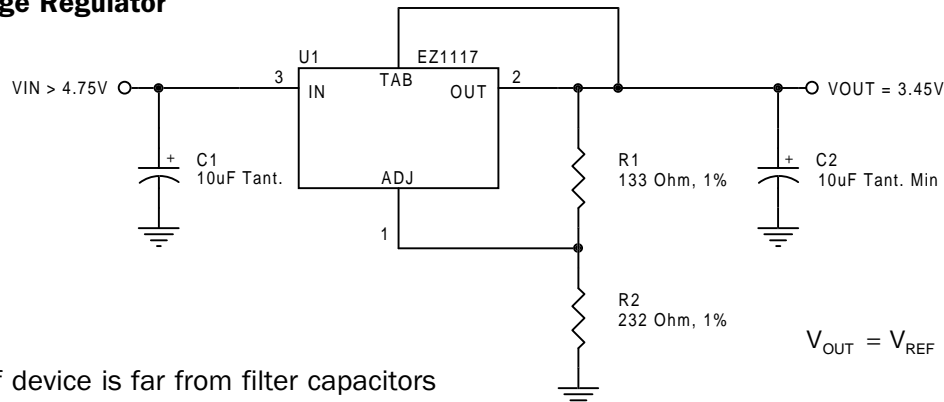

#### Notes:

- (1) C1 needed if device is far from filter capacitors
- (2) C2 minimum value required for stability

$$V_{OUT} = V_{REF} \cdot \left(1 + \frac{R2}{R1}\right) + I_{ADJ} \cdot R2$$

**POWER MANAGEMENT**
**Absolute Maximum Ratings**

Parameter	Symbol	Maximum	Units
Input Supply Voltage	$V_{IN}$	7	V
Power Dissipation	$P_D$	Internally Limited	W
Thermal Resistance Junction to Case SOT-223 TO-263	$\theta_{JC}$	15 3	°C/W
Thermal Resistance Junction to Ambient SOT-223 TO-263	$\theta_{JA}$	156 60	°C/W
Operating Junction Temperature Range	$T_J$	0 to 125	°C
Storage Temperature Range	$T_{STG}$	-65 to 150	°C
Lead Temperature (Soldering) 10 Sec.	$T_{LEAD}$	300	°C
ESD Rating (Human Body Model)	ESD	2	kV

**Electrical Characteristics<sup>(6)</sup>**

Unless otherwise specified: Adj. Option:  $V_{IN} = 2.65V$  to  $7.0V$  and  $I_o = 10mA$  to  $I_{RATED}$ . Fixed Options:  $I_o = 0mA$  to  $I_{RATED}$ ,  $V_{IN} (2.5V) = 3.9V$  to  $7.0V$ ,  $V_{IN} (2.85V) = 4.25V$  to  $7.0V$ ,  $V_{IN} (3.3V) = 4.75V$  to  $7.0V$ .

Parameter	Symbol	$V_{IN}$	$I_o$	$T_J^{(5)}$	Min	Typ	Max	Units
Output Voltage <sup>(1)</sup> (Fixed Voltage Versions)	$V_O$	5V	0mA	25°C	-1%	$V_O$	+1%	V
				O.T.	-2%		+2%	
Reference Voltage <sup>(1)</sup> (Adj Voltage Version)	$V_{REF}$	5V	10mA	25°C	1.238	1.250	1.262	V
				O.T.	1.225		1.275	
Line Regulation <sup>(1)</sup>	$REG_{(LINE)}$		10mA	O.T.		0.035	0.2	%
Load Regulation <sup>(1)</sup>	$REG_{(LOAD)}$	5V		O.T.		0.2	0.4	%
Dropout Voltage <sup>(1)(2)</sup> EZ1117A	$V_D$		100mA 500mA 800mA 1000mA	O.T.		1.00 1.05 1.10 1.10	1.10 1.15 1.20 1.30	V
Current Limit EZ1117 EZ1117A	$I_{CL}$			O.T.	0.8 1.0			A
Quiescent Current Fixed Voltage Version	$I_Q$	5V		O.T.		10	13	mA
Temperature Coefficient	$T_C$			O.T.		0.005		%/°C

**POWER MANAGEMENT**
**Electrical Characteristics (Cont.)<sup>(6)</sup>**

Unless otherwise specified: Adj. Option:  $V_{IN} = 2.65V$  to  $7.0V$  and  $I_O = 10mA$  to  $I_{RATED}$ . Fixed Options:  $I_O = 0mA$  to  $I_{RATED}$ ,  $V_{IN} (2.5V) = 3.9V$  to  $7.0V$ ,  $V_{IN} (2.85V) = 4.25V$  to  $7.0V$ ,  $V_{IN} (3.3V) = 4.75V$  to  $7.0V$ .


Parameter	Symbol	$V_{IN}$	$I_O$	$T_J^{(5)}$	Min	Typ	Max	Units
Adjust Pin Current	$I_{ADJ}$			O.T.		55	90	$\mu A$
Adjust Pin Current Change	$\Delta I_{ADJ}$			O.T.		0.2	5	$\mu A$
Temperature Stability	$T_S$			O.T.		0.5		%
Minimum Load Current Adj Voltage Version	$I_O$	5V		O.T.		5	10	mA
RMS Output Noise <sup>(3)</sup>	$V_N$			25°C		0.003		% $V_O$
Ripple Rejection Ratio <sup>(4)</sup>	$R_A$	5V	$I_{RATED}$	O.T.	60	72		dB

**NOTES:**

- (1) Low duty cycle pulse testing with Kelvin connections required.
- (2)  $\Delta V_{OUT}, \Delta V_{REF} = 1\%$ .
- (3) Bandwidth of 10 Hz to 10kHz.
- (4) 120Hz input ripple ( $C_{ADJ}$  for ADJ = 25 $\mu F$ ).
- (5) O.T. = over specified operating junction temperature range.
- (6)  $I_{RATED} = 1A$  for EZ1117A and 800mA for EZ1117.

## POWER MANAGEMENT

### Pin Configuration

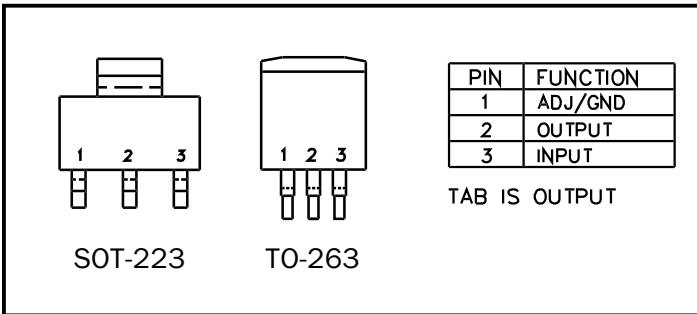

### Ordering Information


Device <sup>(1)(2)</sup>	Package
EZ1117CST-X.X.TR EZ1117ACST-X.X.TR	SOT-223
EZ1117CM-X.X.TR EZ1117ACM-X.X.TR	TO-263



#### Notes:

(1) Where X.X denotes voltage options. Available voltages are: 2.5V, 2.85V and 3.3V. Leave blank for adjustable version (1.3 to 5.7V). Contact factory for additional voltage options.

(2) Only available in tape and reel packaging. A reel contains 2500 (SOT-223) or 800 (TO-263) devices.


### Block Diagram

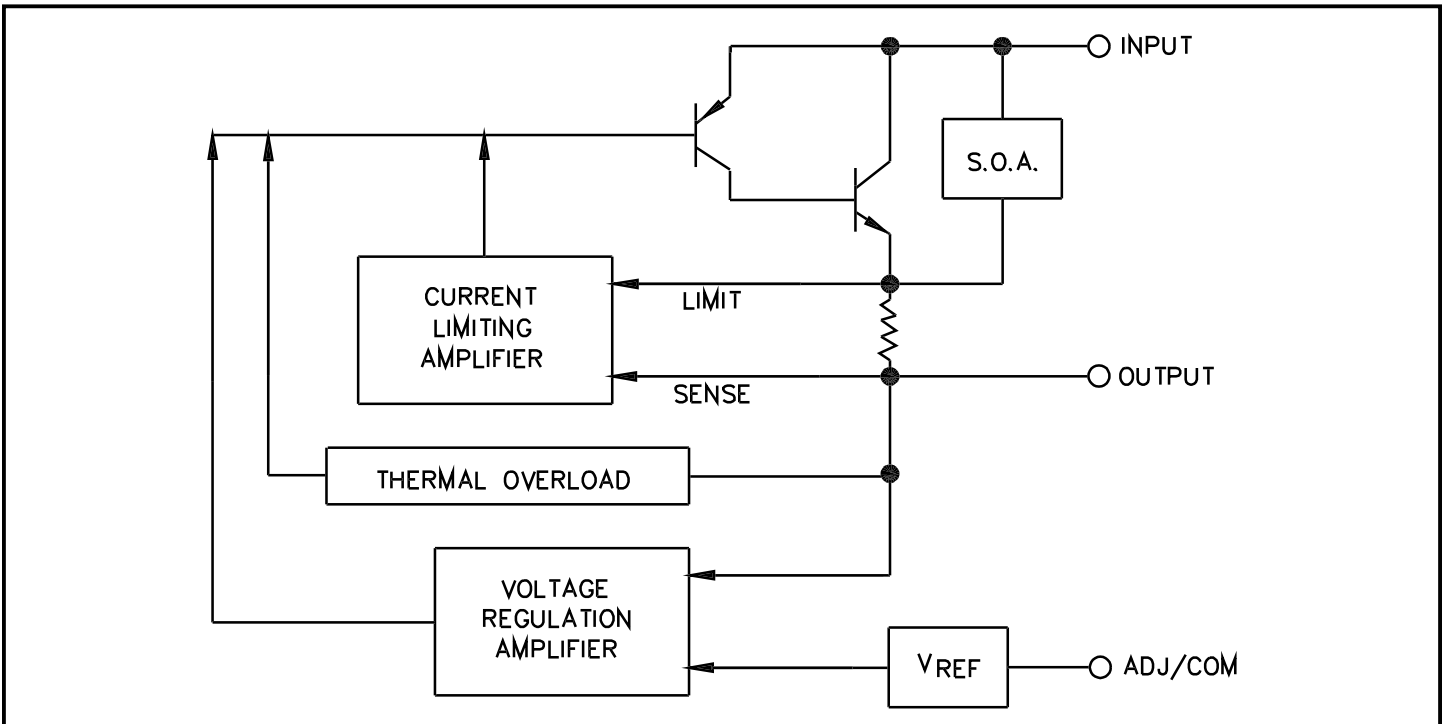

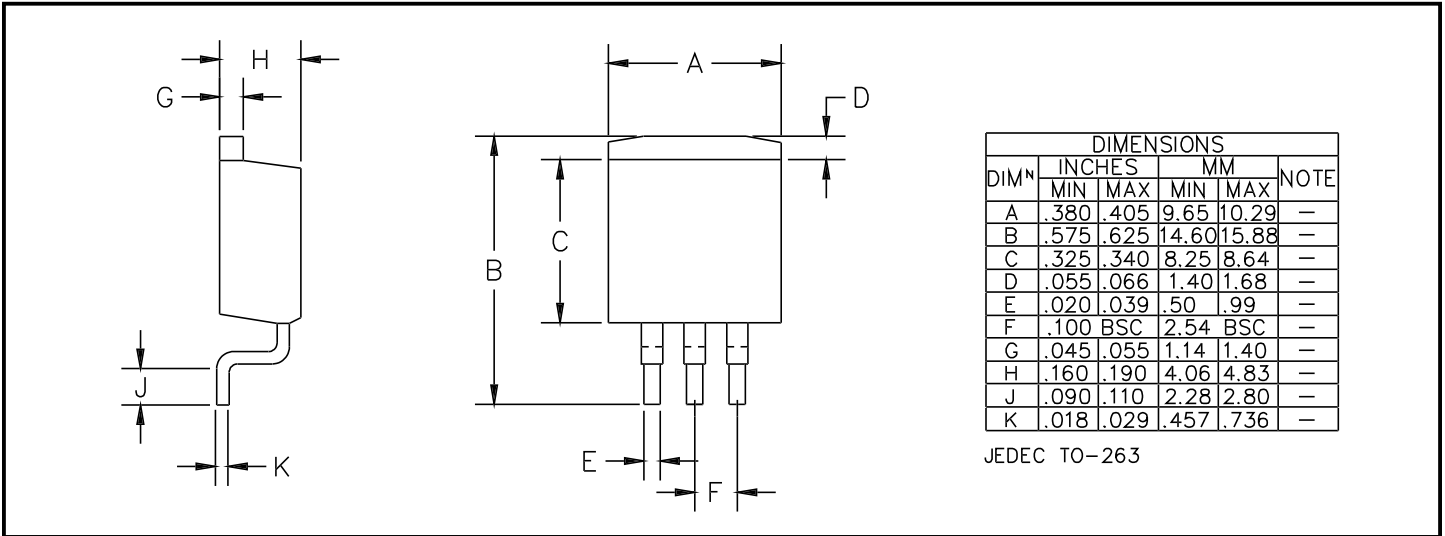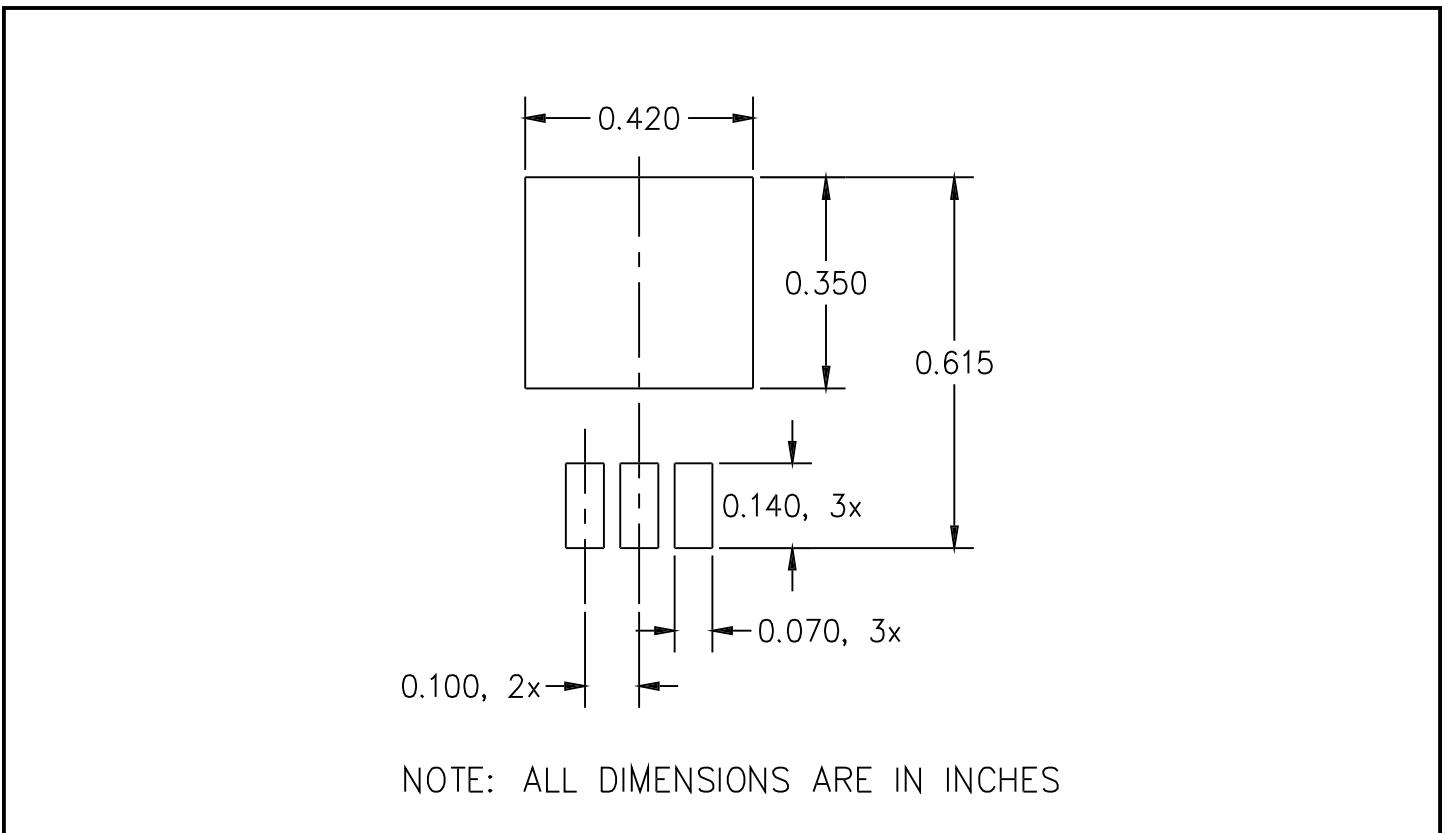
**POWER MANAGEMENT**
**Outline Drawing - TO-263**

**Land Pattern - TO-263**


## POWER MANAGEMENT
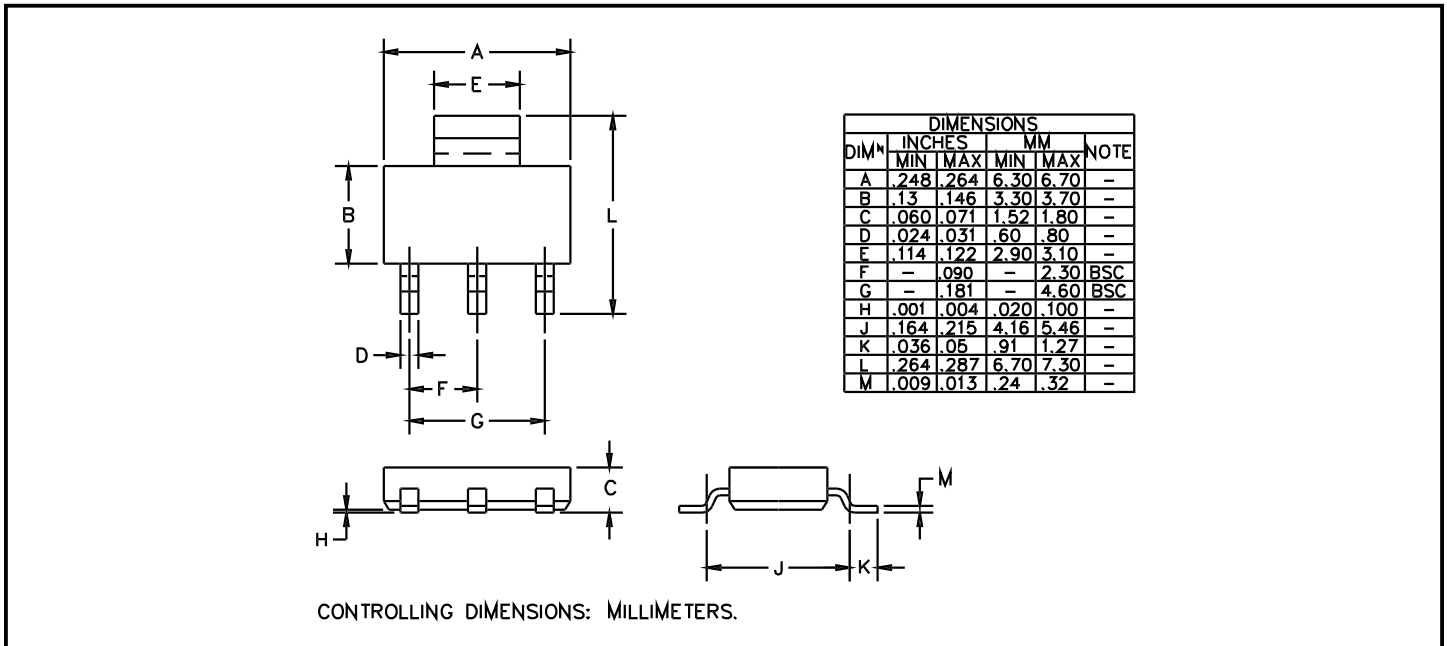
### Outline Drawing - SOT-223

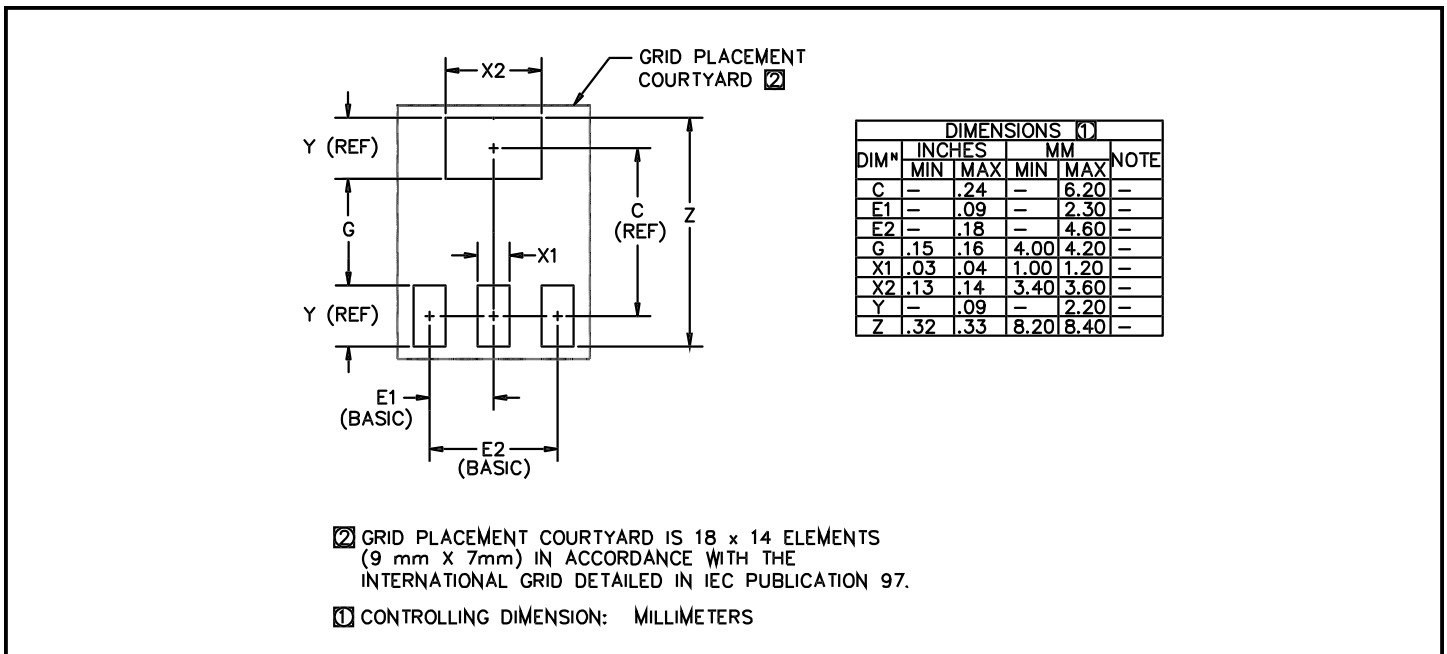

### Land Pattern - SOT-223



### Contact Information

Semtech Corporation  
 Power Management Products Division  
 652 Mitchell Rd., Newbury Park, CA 91320  
 Phone: (805)498-2111 FAX (805)498-3804