


## PA-1000B 30W Amplifier

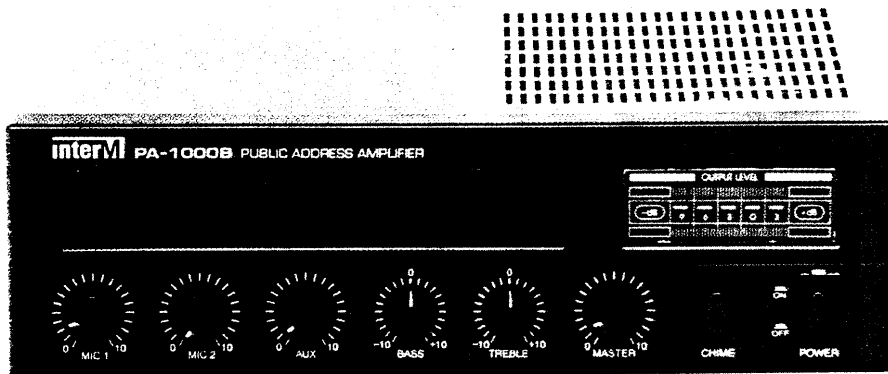


155 627

### FEATURES...

- Output Power: 30W / 100V Line
- Inputs:
  - 3 Inputs - MIC 1, MIC 2 & AUX
  - MIC Inputs have both XLR and 1/4" Jacks
- Muting for Priority:
  - Input MIC 1 has automatic priority over MIC 2 and AUX (defeatable)
  - Telephone Input has automatic priority over all other inputs
- Remote Chime

## PA-935 35W Amplifier

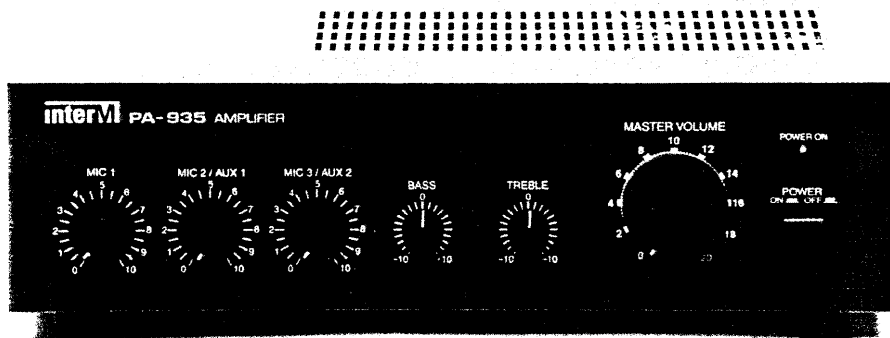

### FEATURES...

- Output Power: 35W / 100V Line
- Inputs:
  - 3 Inputs - MIC 1, MIC 2/AUX & MIC 3/AUX
  - Telephone Input @ 600ohm
- Muting for Priority:
  - Input MIC 1 has automatic priority over MIC 2 and MIC 3 (defeatable)
  - Telephone Input has automatic priority over all other inputs

amplifiers

DED




CAT

cie

## TECHNICAL SPECIFICATIONS...

Rated Power Output (THD 1%)	30W
Output Level/Impedance (Transformer)	100V/333ohm, 15V/8ohm, 11V/4ohm
Pre Amp Out	1V/600ohm
<b>Input Sensitivity/Impedance:</b>	
Mic 1, 2	PL55 1mV/600ohm XLR 0.3mV/600ohm
AUX	100mV/10Kohm
Amp In	1V/10Kohm
Telephone In	0.775V/600ohm
<b>Frequency Response (at Rated Output 1KHz):</b>	
Amp In	60 - 15KHz
AUX	80 - 15KHz
Mic 1, 2	120 - 10KHz
Telephone In	330 - 3.3KHz
<b>Tone Control:</b>	
Treble (10KHz)	± 10dB
Bass (100KHz)	± 10dB
Idle Current	20 - 50mA
DC Offset Voltage	0V
Power Source	AC 120V/240V 50Hz/60Hz
Dimensions	300(W) x 88(H) x 260(D) mm
Weight	4.6kg

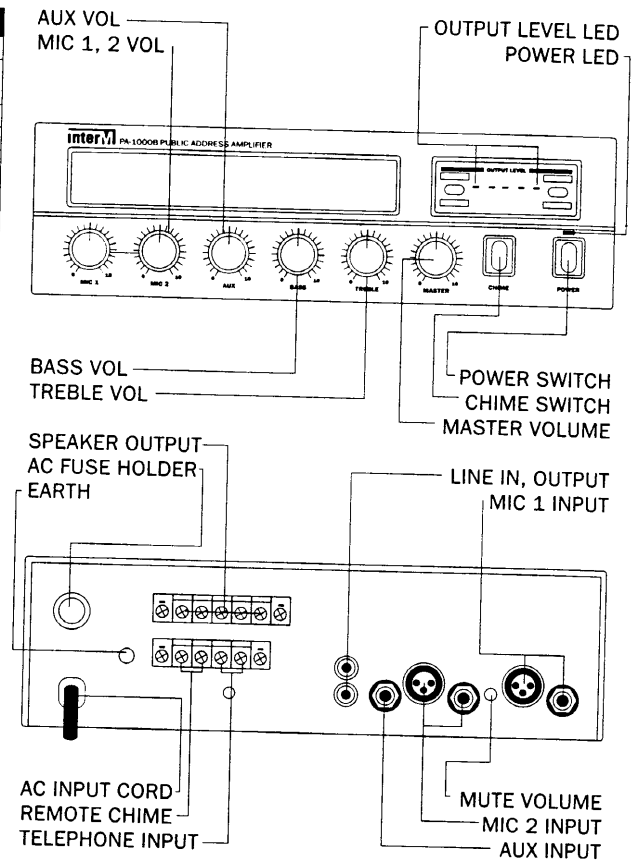

## TECHNICAL SPECIFICATIONS...

Power Output	35W (RMS) 11.8V/4ohm, 16.7V/8ohm, 100V/285ohm, 70V/140ohm
Frequency Response	150Hz - 15KHz
Total Harmonic Distortion	Less than 5%
Tone Control Effect	± 10dB
Signal to Noise Ratio	Better than 60dB
<b>Input Sensitivity/Impedance:</b>	
Mic	2mV/600ohm
AUX	150mV/1Kohm
Telephone	0.775V/600ohm
Power Source	AC 120V/240V 50Hz/60Hz
Dimensions	290(W) x 76(H) x 196(D) mm
Weight	4.4kg

