

DESCRIPTION

The HY532120 is a 1M x 32-bit Fast page mode CMOS DRAM module consisting of two HY518160 in 42/42 pin SOJ or TSOPII on a 72 pin glass-epoxy printed circuit board. 0.22 μ F decoupling capacitor is mounted for each DRAM.

The HYM532120W/SLW/TW/SLTW are Tin-Lead plated and HYM532120WG/SLWG /TWG/SLTWG are Gold plated socket type Single In-line Memory Modules suitable for easy interchange and addition of 4M byte memory.

FEATURES

- **Low power dissipation**
 - Max. self-refresh 5.50mW (SL-part)
 - Max. battery back-up 6.60mW (SL-part)
 - Max. CMOS standby 4.40mW (SL-part)
 - 11.0mW
 - Max. TTL standby 22.0mW
 - Max. operating

Speed	Power
70	1.76W
80	1.54W
100	1.10W


- Single power supply of $5V \pm 10\%$
 - TTL compatible inputs and outputs
 - Fast access time
- | Speed | t _{RAC} | t _{CAC} | t _{PC} |
|-------|------------------|------------------|-----------------|
| 70 | 70ns | 20ns | 45ns |
| 80 | 80ns | 20ns | 50ns |
| 100 | 100ns | 25ns | 60ns |
- Fast page mode operation
 - CAS-before-RAS, RAS-only, Hidden refresh, Self-refresh
 - 1024 refresh cycles / 256ms (SL-part)
 - 1024 refresh cycles / 16ms

Speed	tRAC	tCAC	tPC
70	70ns	20ns	45ns
80	80ns	20ns	50ns
100	100ns	25ns	60ns

PIN DESCRIPTION

RAS0, RAS2	Row Address Strobe
CAS0-CAS3	Column Address Strobe
WE	Write Enable
A0-A9	Address Input
DQ0-DQ34	Data Input/Output
PD1-PD4	Presence Detect
Vcc	Power (+ 5V)
Vss	Ground

PIN CONNECTION

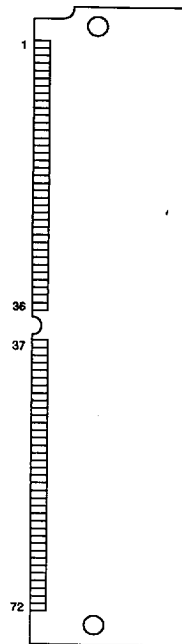

This document is a general product description and is subject to change without notice. Hyundai electronics does not assume any responsibility for use of circuits described. No patent licences are implied.


4675088 0005501 639

©1994 Hyundai Semiconductor
137

PIN NAME

#	NAME	#	NAME
1	Vss	37	NC
2	DQ0	38	NC
3	DQ18	39	Vss
4	DQ1	40	CAS0
5	DQ19	41	CAS2
6	DQ2	42	CAS3
7	DQ20	43	CAST
8	DQ3	44	RAS0
9	DQ21	45	NC
10	Vcc	46	NC
11	NC	47	WE
12	A0	48	NC
13	A1	49	DQ9
14	A2	50	DQ27
15	A3	51	DQ10
16	A4	52	DQ28
17	A5	53	DQ11
18	A6	54	DQ29
19	NC	55	DQ12
20	DQ4	56	DQ30
21	DQ22	57	DQ13
22	DQ5	58	DQ31
23	DQ23	59	Vcc
24	DQ6	60	DQ32
25	DQ24	61	DQ14
26	DQ7	62	DQ33
27	DQ25	63	DQ15
28	A7	64	DQ34
29	NC	65	DQ16
30	Vcc	66	NC
31	A8	67	PD1
32	A9	68	PD2
33	NC	69	PD3
34	RAS2	70	PD4
35	NC	71	NC
36	NC	72	Vss

BLOCK DIAGRAM

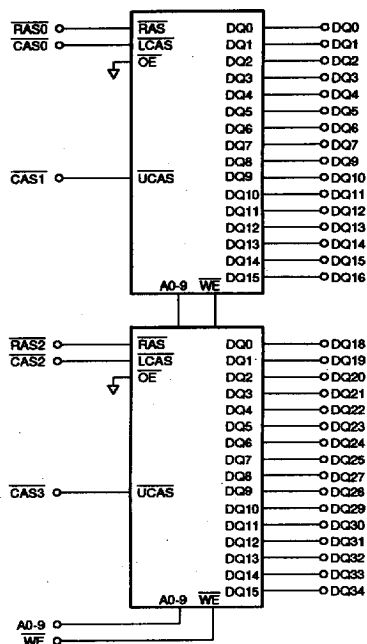

PRESENCE DETECT PINS

PIN	-70	-80	-100
PD1	Vss	Vss	Vss
PD2	Vss	Vss	Vss
PD3	Vss	NC	Vss
PD4	NC	Vss	Vss

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING	UNIT
TA	Ambient Temperature	0 to 70	°C
TSTG	Storage Temperature	-55 to 150	°C
VIN, VOUT	Voltage on Any Pin Relative to Vss	-1.0 to 7.0	V
Vcc	Voltage on Vcc Relative to Vss	-1.0 to 7.0	V
Ios	Short Circuit Output Current	50	mA
Pd	Power Dissipation	2.2	W

NOTE : Operation at or above Absolute Maximum Ratings can adversely affect device reliability.

RECOMMENDED DC OPERATING CONDITIONS

(TA= 0°C to 70°C)

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT
Vcc	Supply Voltage	4.5	5.0	5.5	V
Vih	Input High Voltage	2.4	-	Vcc+ 1.0	V
Vil	Input Low Voltage	-1.0	-	0.8	V

NOTE : All voltages are referenced to Vss.

■ 4675088 0005503 401 ■

DC CHARACTERISTICS

(TA= 0°C to 70°C, VCC= 5V± 10%, VSS= 0V, unless otherwise noted.)

SYMBOL	PARAMETER	TEST CONDITIONS	SPEED/ POWER	MIN.	MAX.	UNIT	NOTE
ILI	Input Leakage Current (Any Input Pin)	VSS ≤ VIN ≤ VCC+ 1.0, All other pins not under test= VSS		-20	20	μA	
ILO	Output Leakage Current (High Impedance State)	VSS ≤ VOUT ≤ VCC, RAS & CAS at VIH		-10	10	μA	
Icc1	VCC Supply Current, Operating	trC= trC (min.)	70 80 100	- - -	320 280 240	mA	1,2,3
Icc2	VCC Supply Current, TTL Standby	RAS & CAS at VIH, other inputs ≥ VSS		-	4	mA	
Icc3	VCC Supply Current, RAS-only refresh	trC= trC (min.)	70 80 100	- - -	320 280 240	mA	1,3
Icc4	VCC Supply Current, Fast Page mode	trC= trC (min.)	70 80 100	- - -	240 220 200	mA	1,2,3
Icc5	VCC Supply Current, CMOS Standby	RAS & CAS ≥ VCC-0.2V	SL-part	- -	2 0.8	mA	5
Icc6	VCC Supply Current, CAS-before-RAS refresh	trC= trC (min.)	70 80 100	- - -	320 280 240	mA	1,3
Icc7	VCC Supply Current, Battery Back Up (SL-part only)	trC= 250μs, CAS= CBR cycling or 0.2V WE= VCC-0.2V A0-A9= VCC-0.2V or 0.2V DQ0-DQ31= VCC-0.2V, 0.2V, or open	trAS ≤ 300ns trAS ≤ 1μs	- - -	9 1.2	mA	1,4,5
Icc8	VCC Supply Current, Self Refresh (SL-Part only)	RAS & CAS ≤ 0.2v other pins same as Icc7			1.0	mA	
VOL	Output Low Voltage	IOL= 4.2mA		-	0.4	V	
VOH	Output High Voltage	IOH= -5mA		2.4	-	V	

NOTE :

- Icc1, Icc3, Icc4, Icc6 and Icc7 depend on cycle rate.
- Icc1, Icc3, Icc4 and Icc6 depend on output loading. Specified values are obtained with the output open.
- Icc is specified as average current. for Icc1, Icc3 and Icc6, address can be changed maximum two times while RAS= VIL. for Icc4, address can be changed maximum once while CAS= VIH.
- Only trAS(max.)= 1μs is applied to refresh of battery backup but trAS(max.)= 10μs is applied to normal functional operation.
- Icc5(max.)= 2mA, Icc7 and Icc8 are applied to SL-part only (HYM532120SLW/SLTW/SLWG/SLTWG).

■ 4675088 0005504 348 ■

AC CHARACTERISTICS

(TA= 0°C to 70°C, VCC= 5V± 10%, VSS= 0V, unless otherwise noted.) NOTE : 1, 2, 3

TYPICAL V _{CC} = 0 V, V _{CC} = 5V ± 0.7V, V _{SS} = 0V, unless otherwise noted.) NOTE 1, 2, 3										
#	SYMBOL	PARAMETER	HYM532120W-Series						UNIT	NOTE
			-70		-80		-100			
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
1	tRC	Random Read or Write Cycle Time	130	-	150	-	180	-	ns	
2	tRPC	RAS to CAS Precharge Time	0	-	0	-	245	-	ns	
3	tPC	Fast Page Mode Cycle Time	45	-	50	-	60	-	ns	
4	tRHCP	RAS Hold Time from CAS Precharge	45	-	45	-	125	-	ns	
5	tRAC	Access Time from RAS	-	70	-	80	-	100	ns	5,10,11
6	tCAC	Access Time from CAS	-	20	-	20	-	25	ns	5,10
7	tAA	Access Time from Column Address	-	35	-	40	-	50	ns	5,11
8	tCPA	Access Time from CAS Precharge	-	40	-	45	-	55	ns	5
9	tCLZ	CAS to Output Low Impedance	0	-	0	-	0	-	ns	5
10	tOFF	Output Buffer Turn-off Delay	0	20	0	20	0	15	ns	6
11	tT	Transition Time (Rise and Fall)	3	50	3	50	3	50	ns	4
12	tRP	RAS Precharge Time	50	-	60	-	70	-	ns	
13	tRAS	RAS Pulse Width	70	10K	80	10K	100	10K	ns	
14	tRASP	RAS Pulse Width (Fast Page Mode)	70	100K	80	100K	100	100K	ns	
15	tRSH	RAS Hold Time	20	-	20	-	25	-	ns	
16	tCSH	CAS Hold Time	70	-	80	-	100	-	ns	
17	tCAS	CAS Pulse Width	20	10K	20	10K	25	10K	ns	
18	tRCD	RAS to CAS Delay	20	50	20	60	25	75	ns	10
19	tRAD	RAS to Column Address Delay Time	15	35	15	40	20	50	ns	11
20	tCRP	CAS to RAS Precharge Time	5	-	5	-	10	-	ns	
21	tCP	CAS Precharge Time	10	-	10	-	10	-	ns	
22	tASR	Row Address Set-up Time	0	-	0	-	0	-	ns	
23	tRAH	Row Address Hold Time	10	-	10	-	15	-	ns	
24	tASC	Column Address Set-up Time	0	-	0	-	0	-	ns	
25	tCAH	Column Address Hold Time	15	-	15	-	20	-	ns	
26	tAR	Column Address Hold Time from RAS	55	-	60	-	75	-	ns	
27	tRAL	Column Address to RAS Lead Time	35	-	40	-	50	-	ns	
28	tRCS	Read Command Set-up Time	0	-	0	-	0	-	ns	
29	tRCH	Read Command Hold Time Referenced to CAS	0	-	0	-	0	-	ns	7
30	tRRH	Read Command Hold Time Referenced to RAS	0	-	0	-	0	-	ns	7
31	tWCH	Write Command Hold Time	15	-	15	-	20	-	ns	
32	tWCR	Write Command Hold Time from RAS	55	-	60	-	75	-	ns	
33	tWP	Write Command Pulse Width	15	-	15	-	20	-	ns	
34	tRWL	Write Command to RAS Lead Time	20	-	20	-	25	-	ns	
35	tCWL	Write Command to CAS Lead Time	20	-	20	-	25	-	ns	
36	tDS	Data-In Set-up Time	0	-	0	-	0	-	ns	8
37	tDH	Data-In Hold Time	15	-	15	-	20	-	ns	8
38	tDHR	Data-In Hold Time Referenced to RAS	55	-	60	-	75	-	ns	
39	tREF	Refresh Period (1024 cycles)	-	16	-	16	-	16	ms	
		SL-part	-	256	-	256	-	256		12
40	twCS	Write Command Set-up Time			0	-	0	-	ns	9

4675088 0005505 284

AC CHARACTERISTICS

(continued)

(continued)

#	SYMBOL	PARAMETER	HYM532120W-Series						UNIT	NOTE
			-70		-80		-100			
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
41	tCSR	CAS Set-up Time (CBR Cycle)	10	-	10	-	10	-	ns	
42	tCHR	CAS Hold Time (CBR Cycle)	15	-	15	-	20	-	ns	
43	tCPT	CAS Precharge Time (CBR Counter Test)	40	-	40	-	50	-	ns	
44	tRPS	RAS Precharge Time (Self Refresh Cycle)	130	-	150	-	180	-	ns	
45	tCHS	CAS Hold Time (Self Refresh Cycle)	-50	-	-50	-	-50	-	ns	
46	tRASS	RAS Pulse Width (Self Refresh Cycle)	100	-	100	-	100	-	ns	
47	tRPS	RAS Precharge Time (Self Refresh Cycle)	130	-	130	-	130	-	ns	
48	tCHS	CAS Hold Time (Self Refresh Cycle)	-50	-	-50	-	-50	-	ns	

■ 4675088 0005506 110 ■

NOTE :

1. An initial pause of 200 μ s is required after power-up followed by 8 RAS cycles before proper device operation is achieved. In case of using internal refresh counter, a minimum of 8 CAS-before-RAS initialization cycles instead of 8 RAS-only refresh cycles are required. The device should be carefully initialized to be prevented from being entered into multi bit test mode.
2. If RAS= Vss during power-up, the HYM532120 could begin an active cycle. This condition results in higher power-up current than necessary demands from the power-up. It is recommended that RAS and CAS track with Vcc during power-up or be held at a valid VIH in order to minimize the power-up current.
3. VIH(min.) and VIL(max.) are reference levels for measuring timing of input signals. Transition time is measured between VIH and VIL and assumed to be 5ns for all inputs.
4. Refer to the HY5118160 data sheet for detailed information.
5. Measured with a load equivalent to 2 TTL loads and 100pF.
6. toFF(max.) defines the time at which the output achieves the open circuit condition and is not referenced to output voltage levels.
7. Either tRCH or tRRH must be satisfied for a read cycle.
8. These parameters are referenced to CAS leading edge in early write cycles.
9. twCS is not a restrictive operating parameter. It is included in the data sheet as electrical characteristics only. If twCS $\geq$ twCS(min.), the cycle is an early write cycle and data out pin will remain open circuit (high impedance) through the entire cycle.
10. Operation within the tRCD(max.) limit insures that tRAC(max.) can be met. tRCD(max.) is specified as a reference point only. If tRCD is greater than the specified tRCD(max.) limit, then access time is controlled by tCAC.
11. Operation within the tRAD(max.) limit insures that tRAC(max.) can be met. tRAD(max.) is specified as a reference point only. If tRAD is greater than the specified tRAD(max.) limit, then access time is controlled by tAA.
12. tREF(max.)= 256ms is applied to SL-part only (HYM532120SLW/SLTW/SLWG/SLTWG).

CAPACITANCE


(TA= 25°C, Vcc= 5V $\pm$ 10%, Vss= 0V, f= 1MHz, unless otherwise noted.)

SYMBOL	PARAMETER	TYP.	MAX.	UNIT
CIN1	Input Capacitance (A0-A9)	-	25	pF
CIN2	Input Capacitance (WE)	-	25	pF
CIN3	Input Capacitance (RAS0-RAS2)	-	20	pF
CIN4	Input Capacitance (CAS0-CAS3)	-	20	pF
CDQ	Data Input/Output Capacitance (DQ0-DQ31)	-	15	pF


4675088 0005507 057

PACKAGE INFORMATION

72 pin Single In-line Memory Module (W; Tin-Lead plated, WG; Gold plated)
HYM532120/SL (SOJ Mounted)

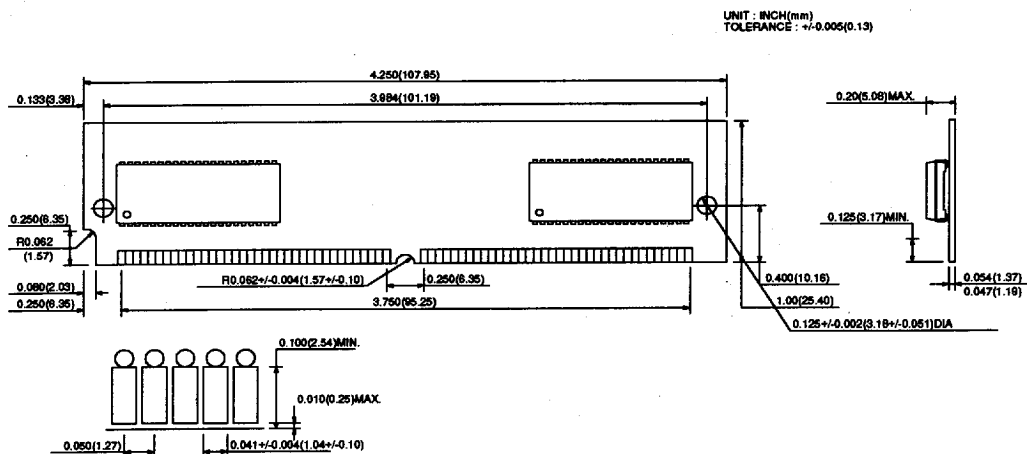

HYM532120T/SLT (TSOPII Mounted)

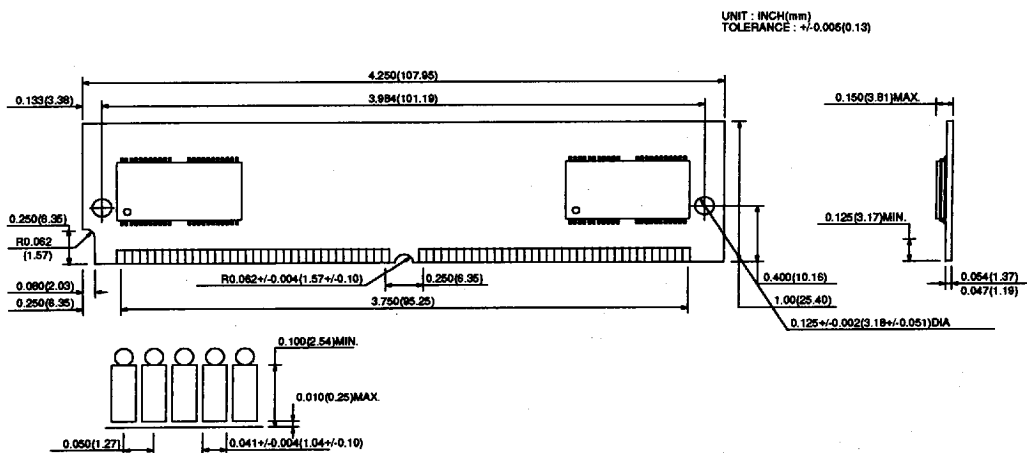

4675088 0005508 T93

ORDERING INFORMATION

PART NUMBER	SPEED	POWER	PACKAGE	PLATING
HYM532120W	70/80/100		SIMM	Tin-Lead
HYM532120SLW	70/80/100	SL-part	SIMM	Tin-Lead
HYM532120TW	70/80/100		SIMM	Tin-Lead
HYM532120SLTW	70/80/100	SL-part	SIMM	Tin-Lead
HYM532120WG	70/80/100		SIMM	Gold
HYM532120SLWG	70/80/100	SL-part	SIMM	Gold
HYM532120TWG	70/80/100		SIMM	Gold
HYM532120SLTWG	70/80/100	SL-part	SIMM	Gold

■ 4675088 0005509 92T ■