


2.1GHz Band LNA GaAs MMIC

■GENERAL DESCRIPTION

NJG1116HB3 is a LNA IC designed for 2.1GHz band W-CDMA cellular phone .This IC has the function which passes LNA, and high gain mode or low gain mode can be chosen.

An ultra small and ultra thin package of USB8 is adopted.

■PACKAGE OUTLINE




NJG1116HB3

■FEATURES

- Low voltage operation +2.7V typ
- Low current consumption 2.0mA typ. @ $V_{CTL}=2.7V$
2uA typ. @ $V_{CTL}=0V$
- High gain 14.7dB typ. @ $V_{CTL}=2.7V$, fRF =2140MHz
- Low noise figure 1.6dB typ. @ $V_{CTL}=2.7V$, fRF=2140MHz
- Pout at 1dB Gain Compression point -13.0dBm typ. @ $V_{CTL}=2.7V$, fRF=2140MHz
+11.0dBm typ. @ $V_{CTL}=0V$, fRF=2140MHz
- High input IP3 -3dBm typ. @ $V_{CTL}=2.7V$, fRF=2140MHz
+3dBm typ. @ $V_{CTL}=0V$, fRF=2140MHz
- Small package USB8-B3 (Package size: 1.5x1.5x0.75mm)

■PIN CONFIGURATION

HB3 Type
(Top View)

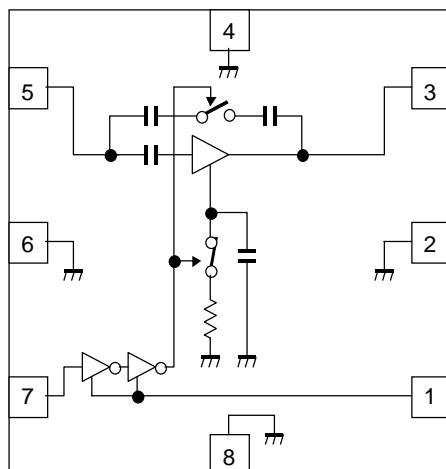

Pin Connection

1. V_{INV}
2. GND
3. RF OUT
4. GND
5. RF IN
6. GND
7. V_{CTL}
8. GND

Note: Specifications and description listed in this catalog are subject to change without prior notice.

NJG1116HB3

■ABSOLUTE MAXIMUM RATINGS

($T_a=+25^\circ\text{C}$, $Z_s=Z_l=50\Omega$)

PARAMETERS	SYMBOL	CONDITIONS	RATINGS	UNITS
Operating voltage	V_{DD}		5.0	V
Inverter supply voltage	V_{INV}		5.0	V
Control voltage	V_{CTL}		5.0	V
Input power	P_{in}	$V_{DD}=2.7\text{V}$	+15	dBm
Power dissipation	P_D		135	mW
Operating temperature	T_{opr}		-40~+85	°C
Storage temperature	T_{stg}		-55~+125	°C

■ELECTRICAL CHARACTERISTICS 1 (DC)

($V_{DD}=V_{INV}=2.7\text{V}$, $T_a=+25^\circ\text{C}$, $Z_s=Z_l=50\Omega$)

PARAMETERS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Operating voltage	V_{DD}		2.5	2.7	4.5	V
Inverter supply voltage	V_{INV}		2.5	2.7	4.5	V
Control voltage (High)	$V_{CTL(H)}$		2.0	2.7	V_{INV}	V
Control voltage (Low)	$V_{CTL(L)}$		0	0	0.8	V
Operating current1	I_{DD1}	RF OFF, $V_{CTL}=2.7\text{V}$	-	2.0	2.7	mA
Operating current2	I_{DD2}	RFOFF, $V_{CTL}=0\text{V}$	-	2	30	UA
Inverter current1	I_{INV1}	RF OFF, $V_{CTL}=2.7\text{V}$	-	50	100	UA
Inverter current2	I_{INV2}	RF OFF, $V_{CTL}=0\text{V}$	-	110	200	UA
Control current	I_{CTL}	RF OFF, $V_{CTL}=2.7\text{V}$	-	20	50	UA

■ELECTRICAL CHARACTERISTICS 2 (LNA High Gain Mode)(V_{DD}=V_{INV}=2.7V, V_{CTL}=2.7V, freq=2140MHz, T_a=+25°C, Z_s=Z_l=50Ω, TEST CIRCUIT)

PARAMETERS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Operating frequency	freq		2110	2140	2170	MHz
Small signal gain1	Gain1		13.0	14.7	16.0	dB
Noise figure1	NF1		-	1.6	2.0	dB
Pin at 1dB gain compression point1	P _{-1dB(IN)1}		-16.0	-13.0	-	dBm
Input 3rd order intercept point	IIP3_1	f ₁ =fRF, f ₂ =fRF+100kHz, Pin=-36dBm	-6.0	-3.0	-	dBm
RF Input VSWR1	VSWR _I 1		-	1.5	2.0	-
RF Output VSWR1	VSWR _o 1		-	1.5	2.2	-

■ELECTRICAL CHARACTERISTICS 2 (LNA Low Gain Mode)(V_{DD}=V_{INV}=2.7V, V_{CTL}=0V, freq=2140MHz, T_a=+25°C, Z_s=Z_l=50Ω, TEST CIRCUIT)

PARAMETERS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Operating frequency	freq		2110	2140	2170	MHz
Small signal gain2	Gain2		-5.0	-4.0	-2.5	dB
Noise figure2	NF2		-	4.0	5.0	dB
Pin at 1dB gain compression point2	P _{-1dB(IN)2}		+8.0	+11.0	-	dBm
Input 3rd order intercept point2	IIP3_2	F ₁ =fRF, f ₂ =fRF+100kHz, Pin=-36dBm	0	+3.0	-	dBm
RF Input VSWR2	VSWR _I 2		-	1.9	2.3	-
RF Output VSWR2	VSWR _o 2		-	1.7	2.1	-

NJG1116HB3

■TERMINAL INFOMATION

No.	SYMBOL	DESCRIPTION
1	VINV	Inverter voltage supplies terminal.
2	GND	Ground terminal. (0V)
3	RFOUT	RF output terminal. The RF signal is output through external matching circuit connected to this terminal. Please connected inductance L3 and power supply as shown in test circuit, since this terminal is also the terminal of LNA power supply.
4	GND	Ground terminal. (0V)
5	RFIN	RF input terminal. The RF signal is input through external matching circuit connected to this terminal. A DC blocking capacitor is not required.
6	GND	Ground terminal. (0V)
7	VCTL	Control voltage supply terminal. The High level voltage of this terminal controls LNA High Gain Mode. The Low level voltage of this terminal controls LNA Low Gain Mode.
8	GND	Ground terminal. (0V)

CAUTION







- 1) Ground terminal (No.2, 4, 6, 8) should be connected to the ground plane as low inductance as possible.

■TRUTH TABLE

V_{CTL}	Operating Current	Bypass circuit	LNA Mode
L	OFF	ON	Low Gain Mode
H	ON	OFF	High Gain Mode

"H"= $V_{CTL}(H)$, "L"= $V_{CTL}(L)$


ELECTRICAL CHARACTERISTICS (LNA High Gain Mode)

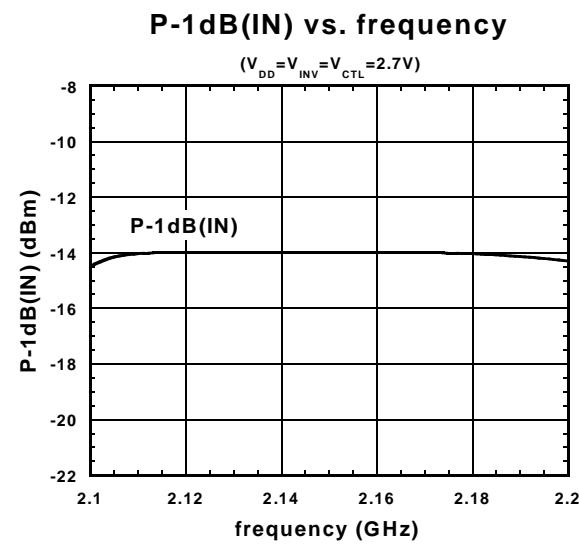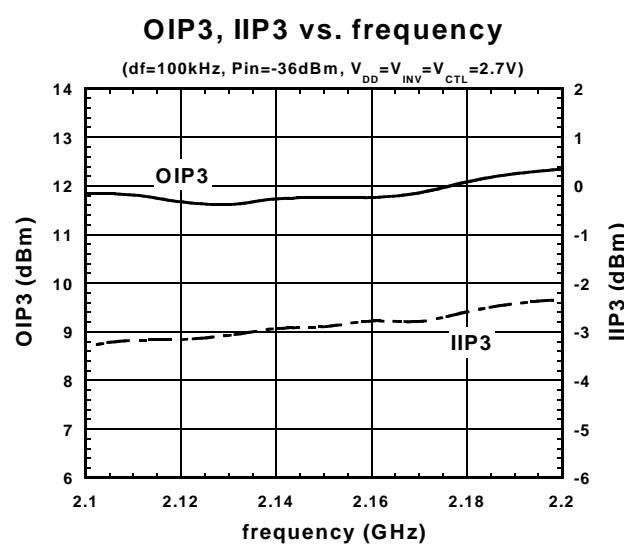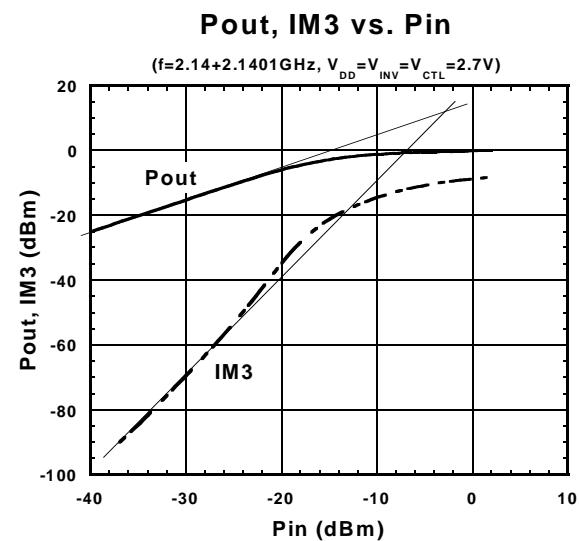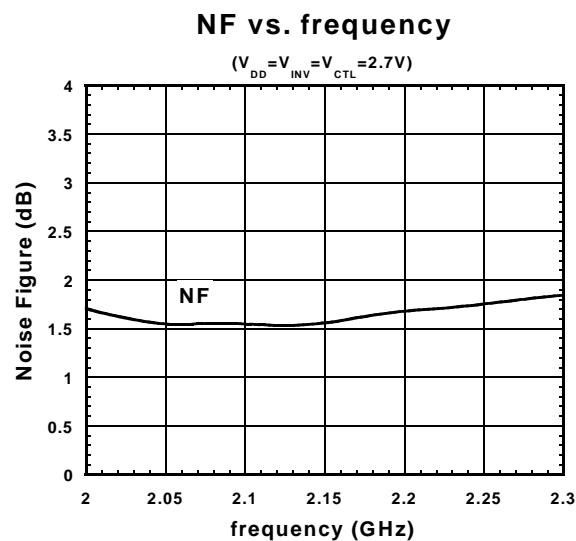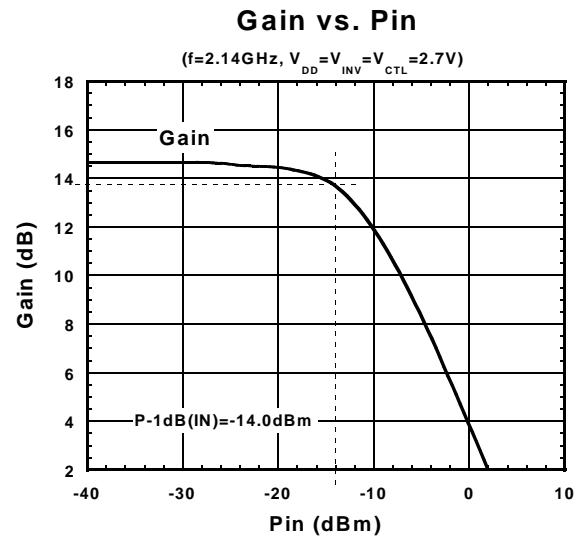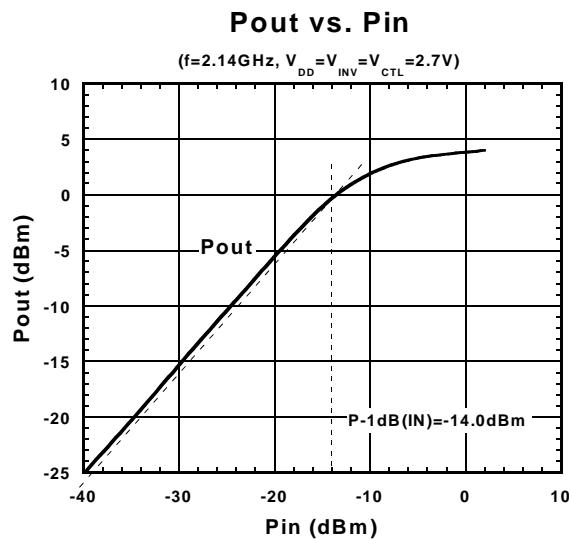


NJG1116HB3

ELECTRICAL CHARACTERISTICS (LNA High Gain Mode)


Gain, NF vs. V_{DD}

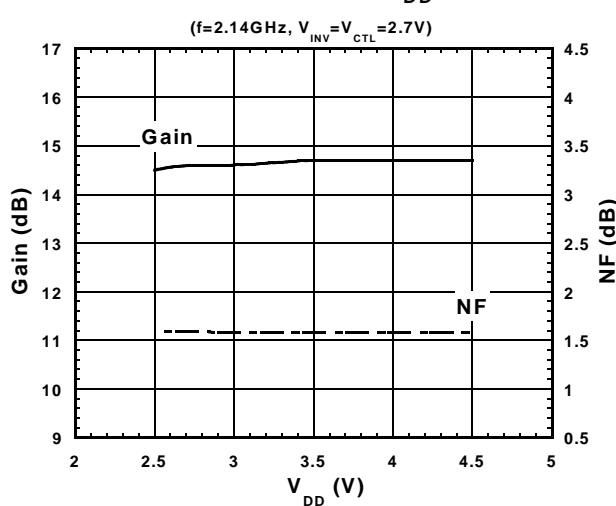


OIP3, IIP3 vs. V_{DD}

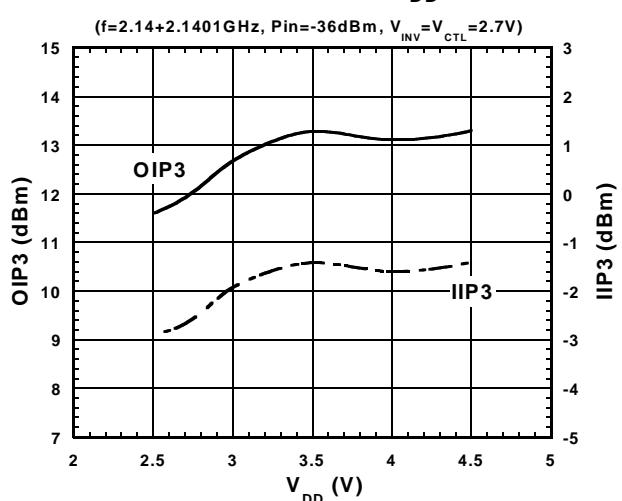


P-1dB(IN) vs. V_{DD}

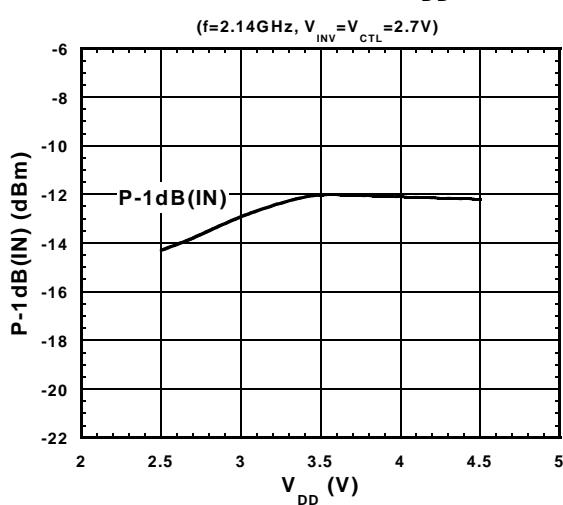






VSWR vs. V_{DD}

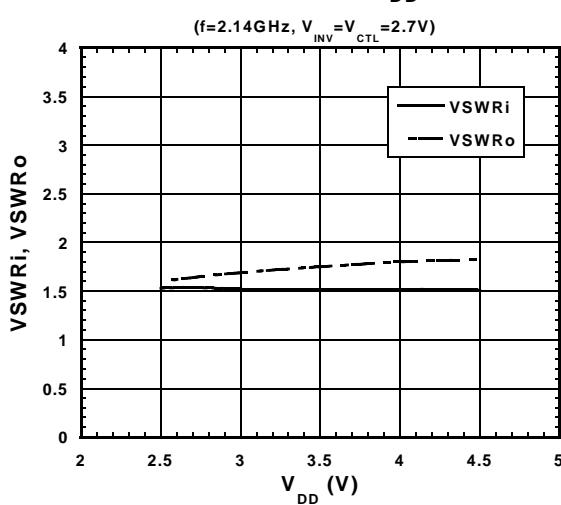

I_{DD} vs. V_{DD}

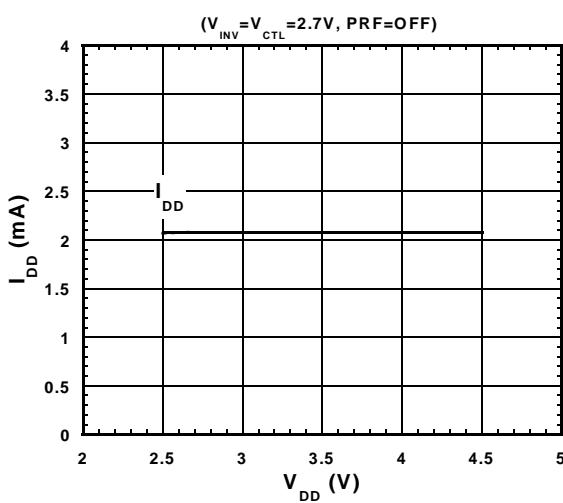


ELECTRICAL CHARACTERISTICS (LNA High Gain Mode)

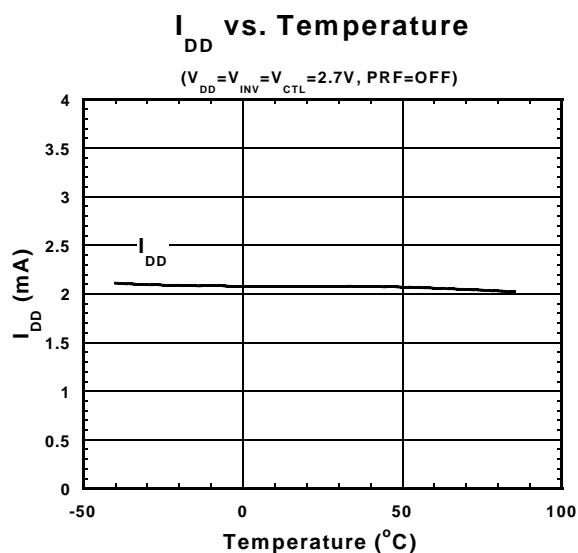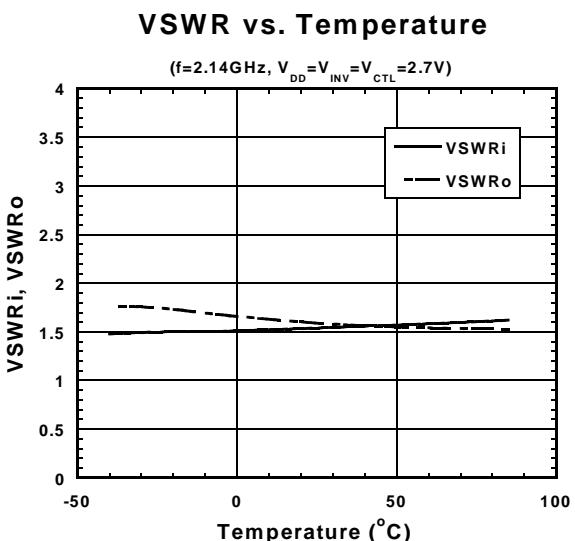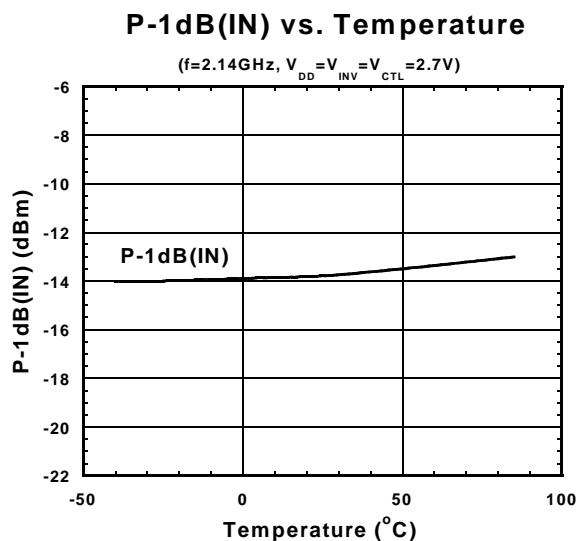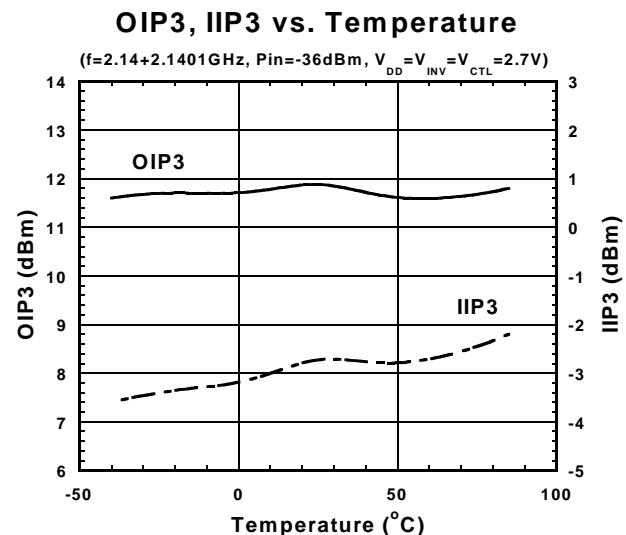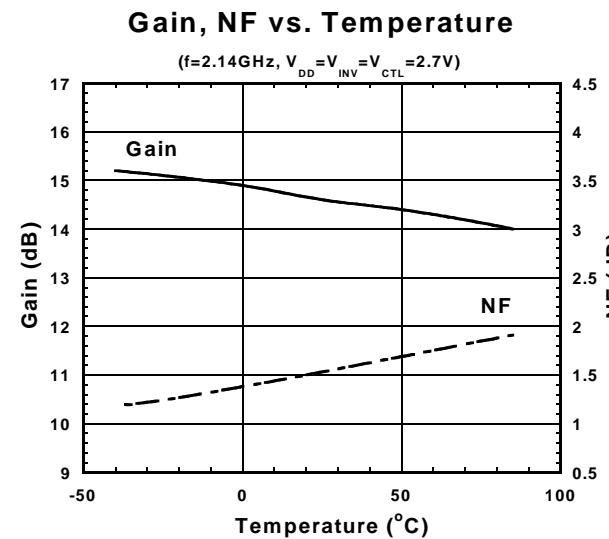


NJG1116HB3


ELECTRICAL CHARACTERISTICS (LNA High Gain Mode)

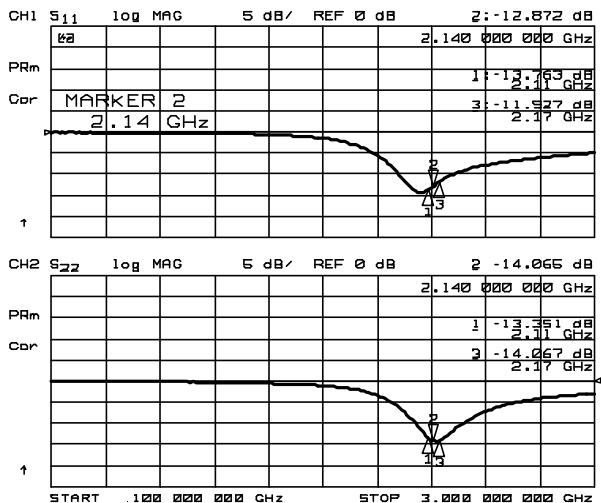


S11, S22

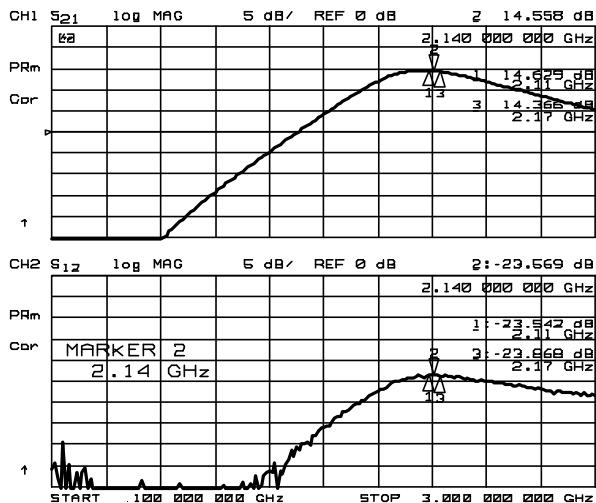


S21, S12

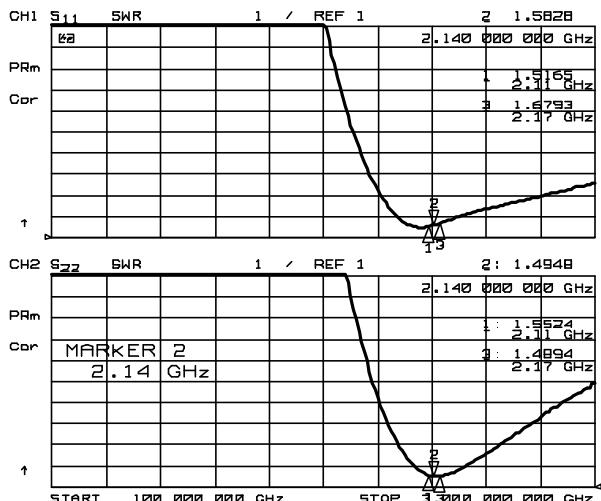


VSWR

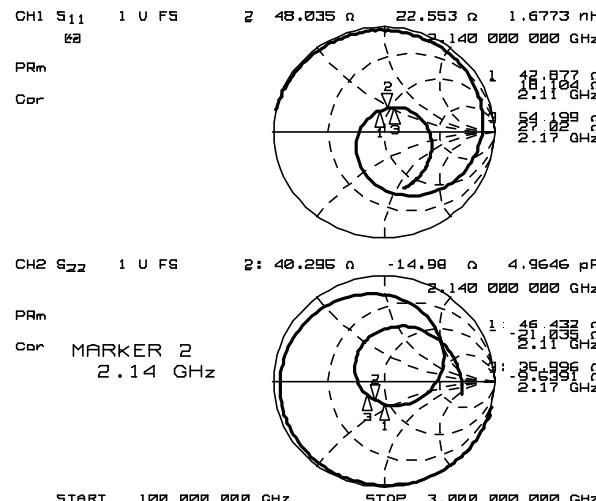

Zin, Zout

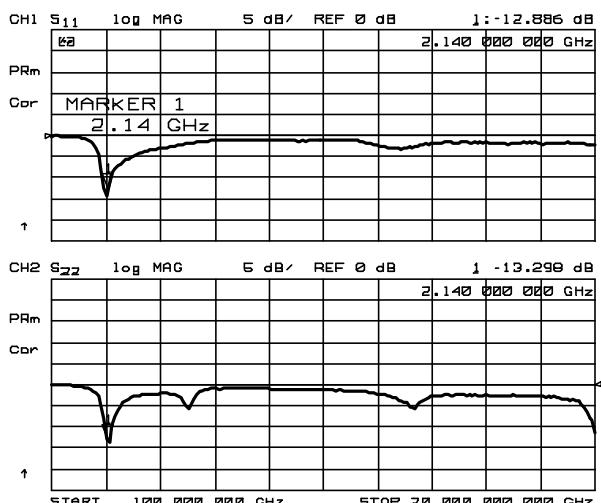


S11, S22 (100MHz~20GHz)

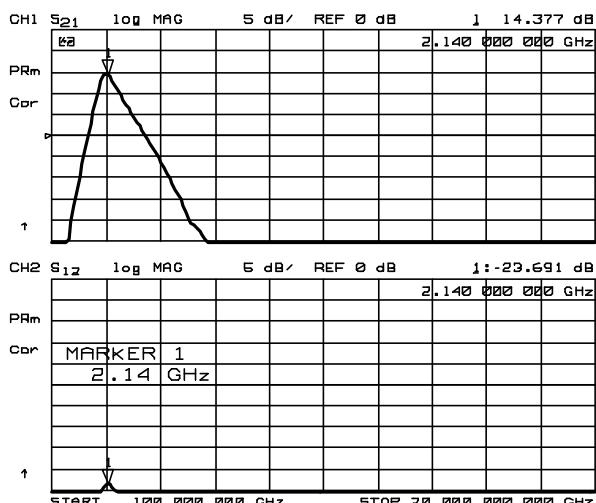


S21, S12 (100MHz~20GHz)

ELECTRICAL CHARACTERISTICS (LNA Low Gain Mode)


Pout vs. Pin

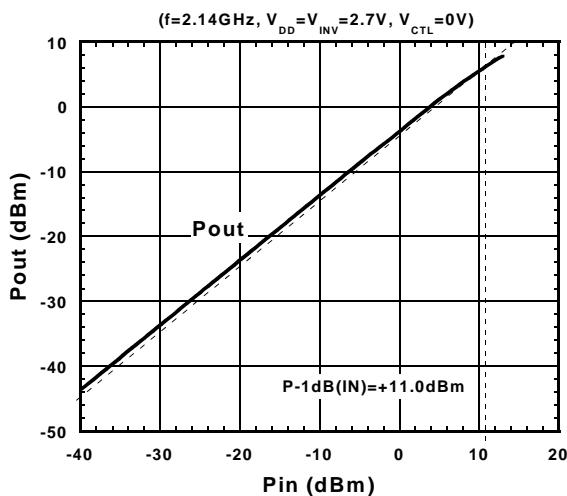


Gain vs. Pin

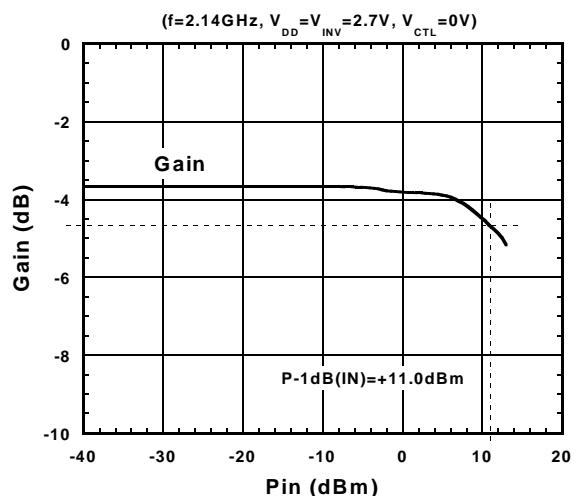


NF vs. frequency

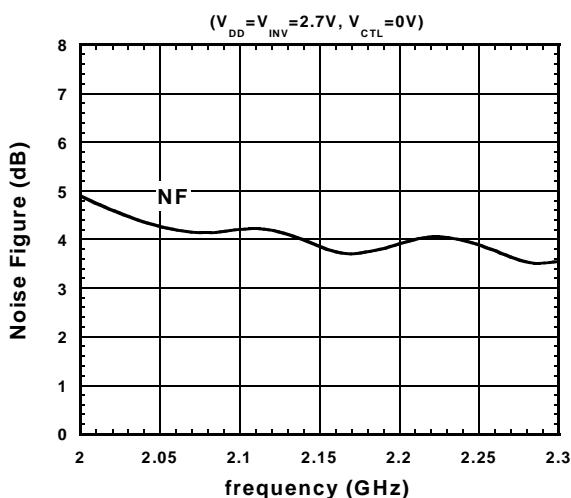


Pout, IM3 vs. Pin

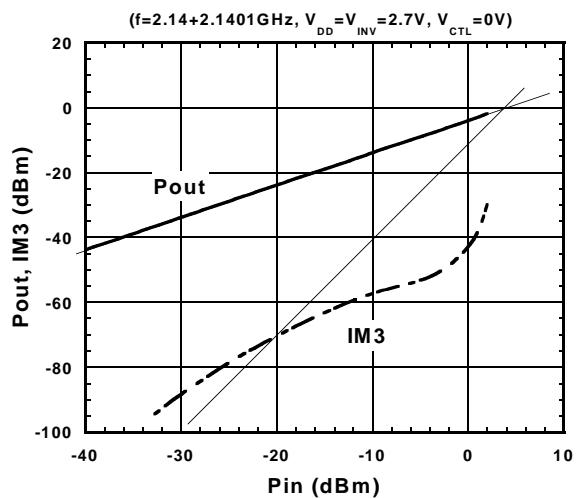

OIP3, IIP3 vs. frequency

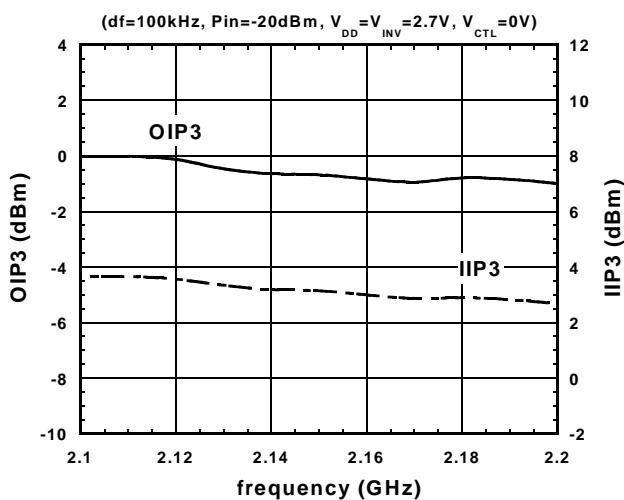


P-1dB(IN) vs. frequency

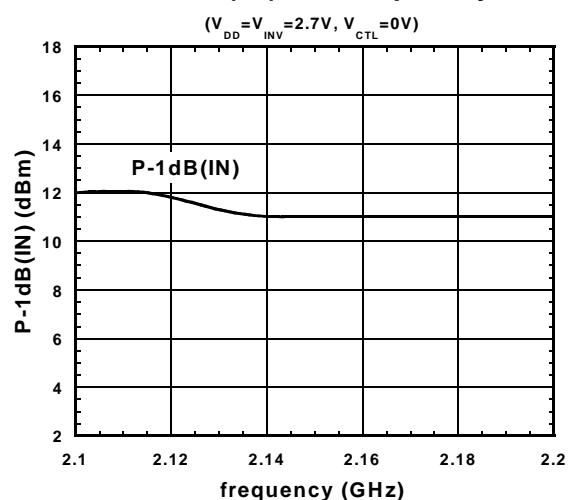


NJG1116HB3

ELECTRICAL CHARACTERISTICS (LNA Low Gain Mode)


Gain, NF vs. V_{DD}

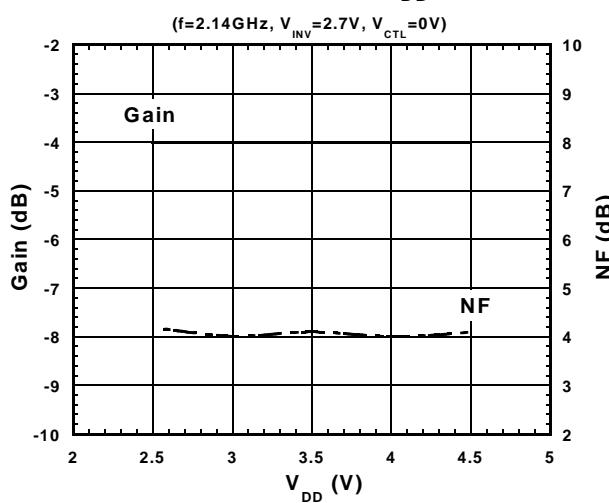


OIP3, IIP3 vs. V_{DD}

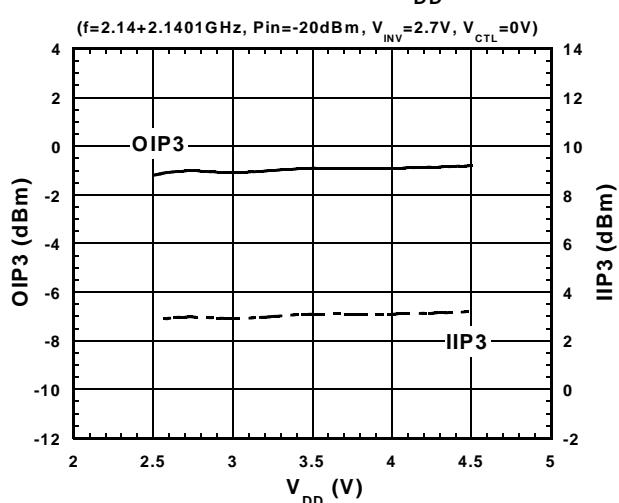


P-1dB(IN) vs. V_{DD}

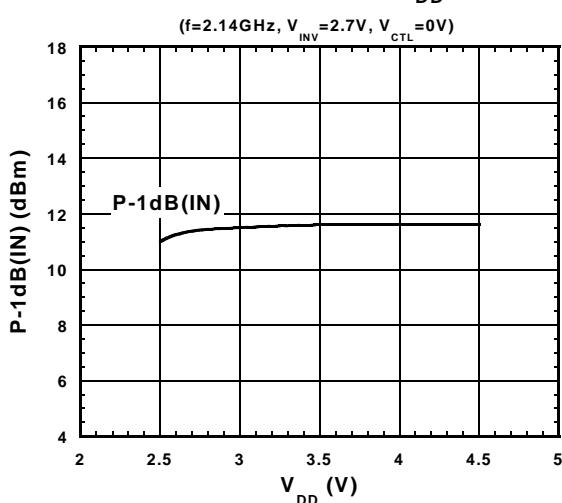






VSWR vs. V_{DD}

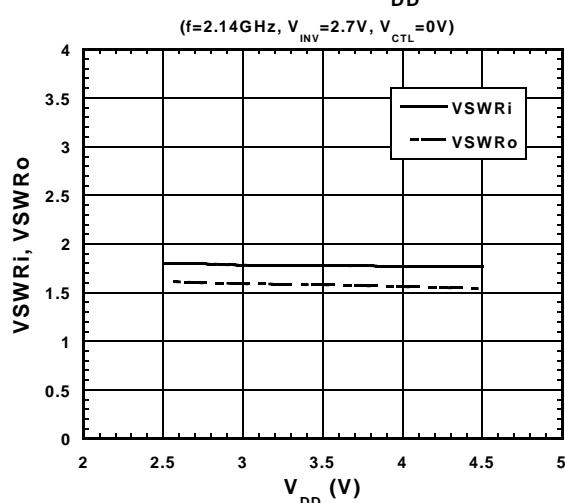

I_{DD} vs. V_{DD}

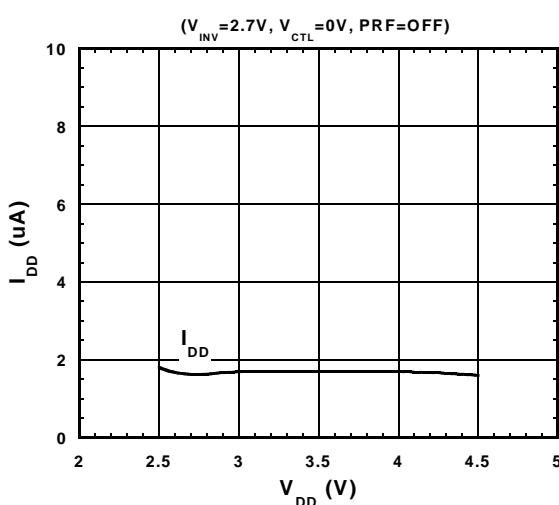


ELECTRICAL CHARACTERISTICS (LNA Low Gain Mode)

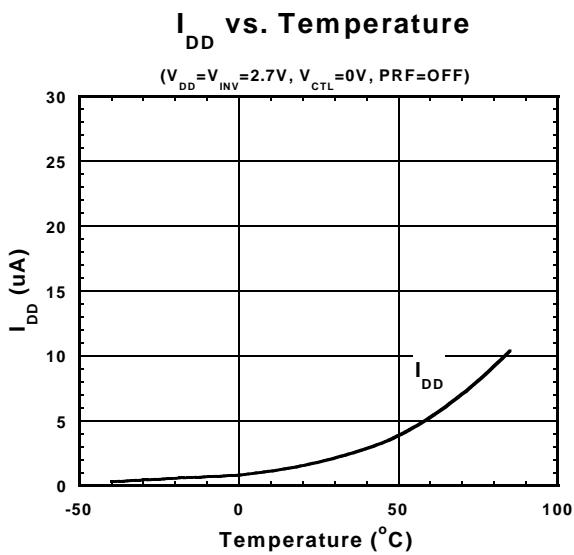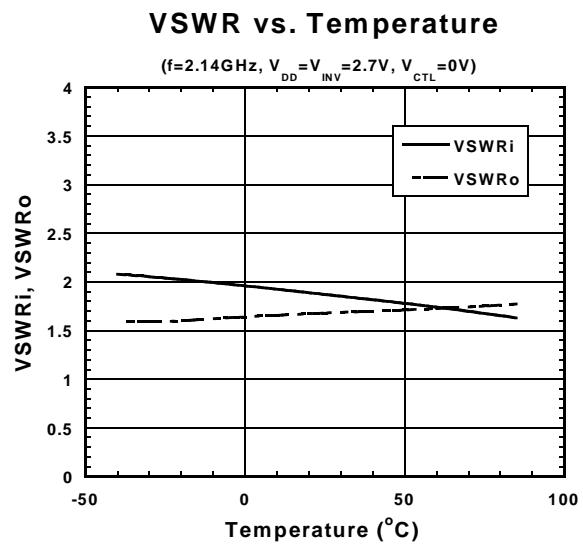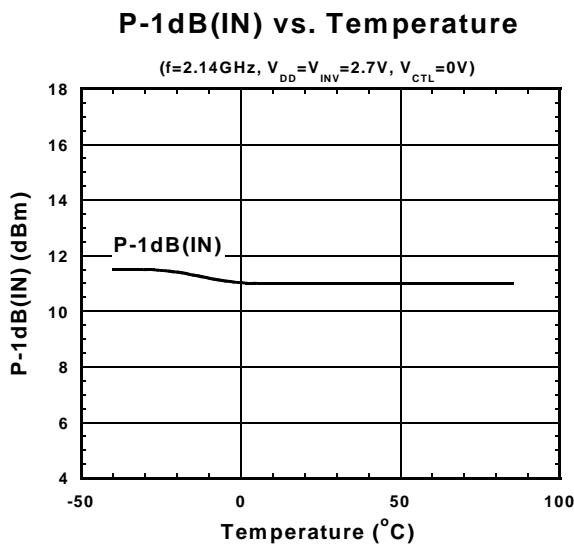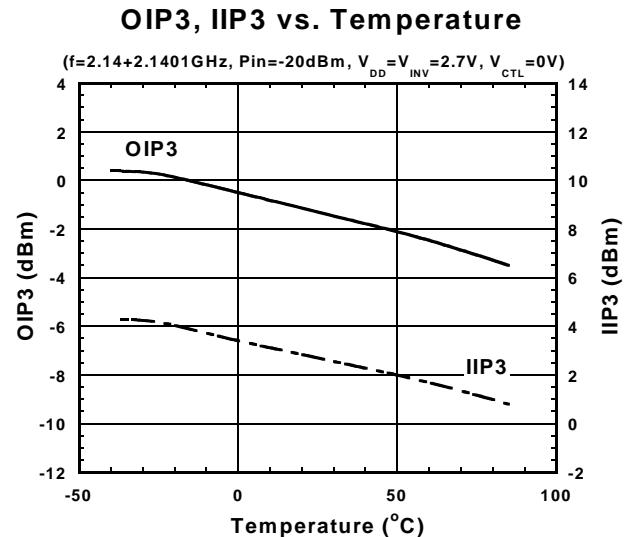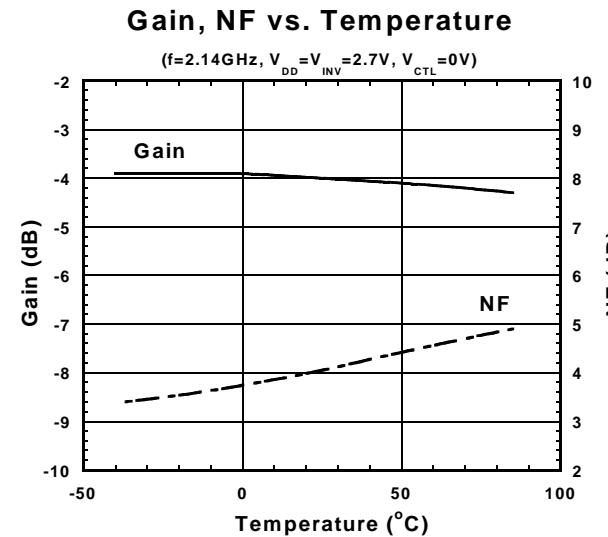


NJG1116HB3


ELECTRICAL CHARACTERISTICS (LNA Low Gain Mode)

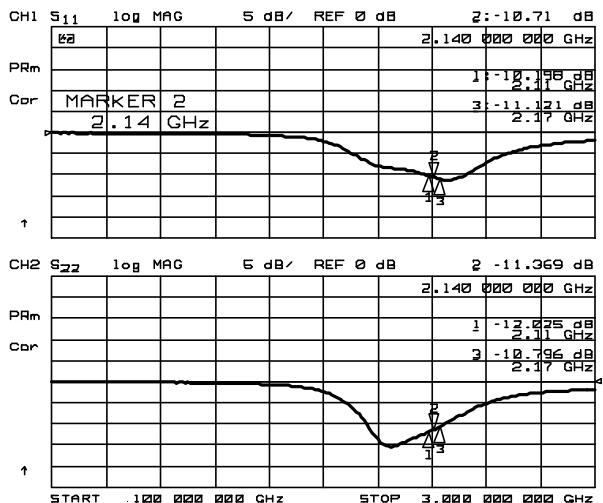


S11, S22

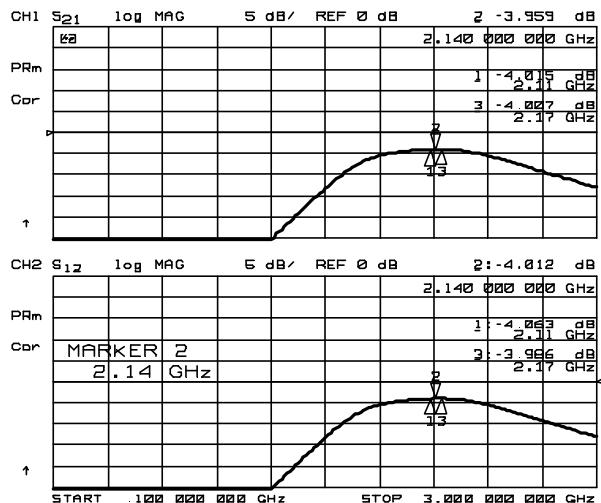


S21, S12

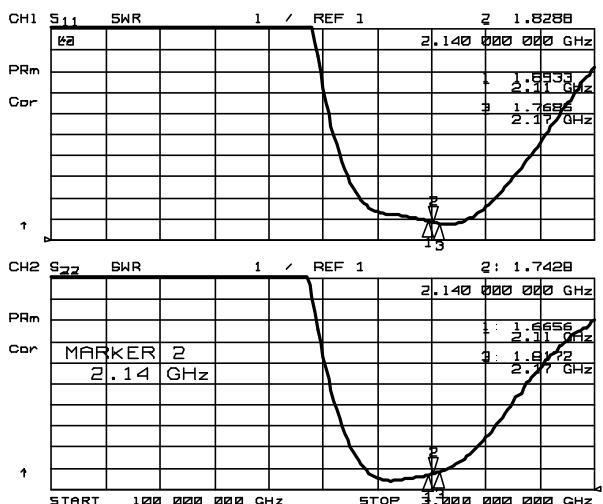


VSWR

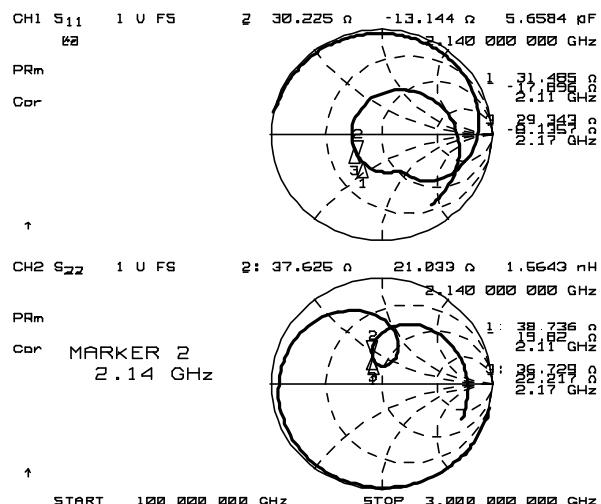

Zin, Zout

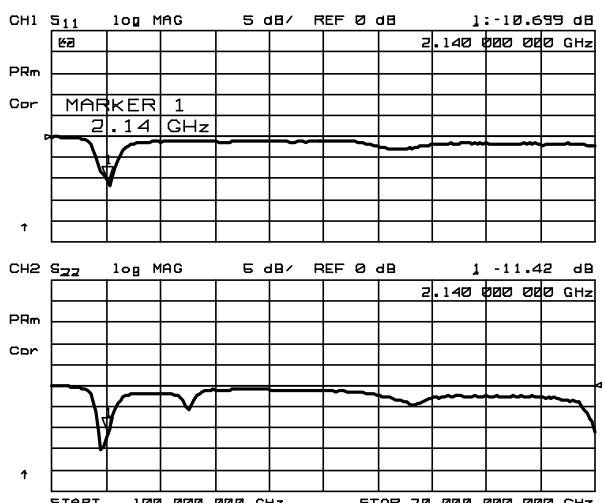


S11, S22 (100MHz~20GHz)

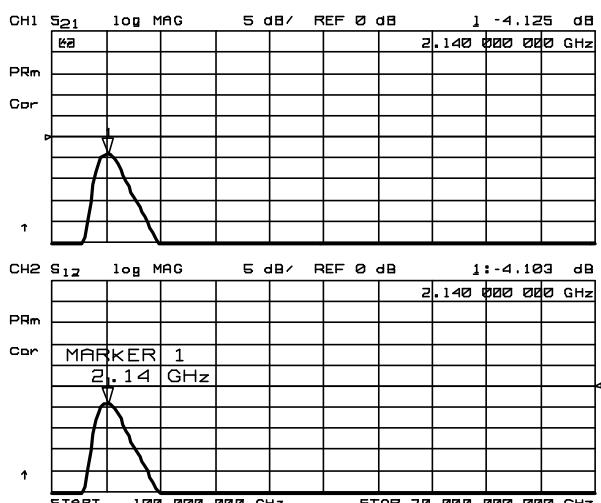

S21, S12 (100MHz~20GHz)


■TEST CIRCUIT

(Top View)

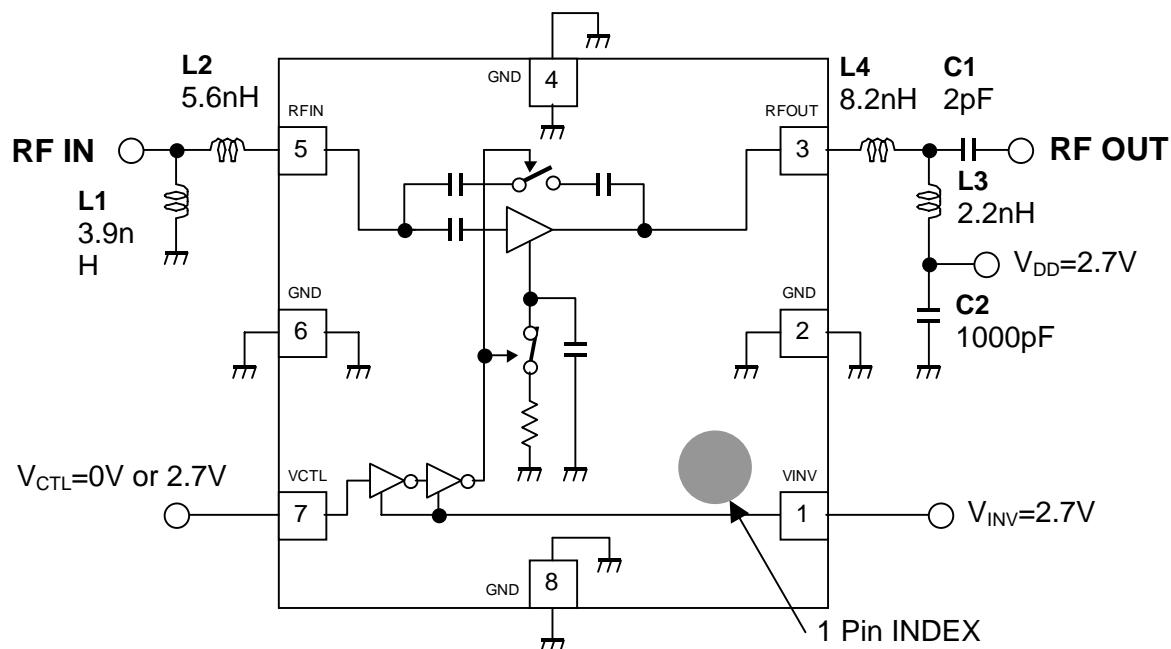

■RECOMMENDED PCB DESIGN

(Top View)

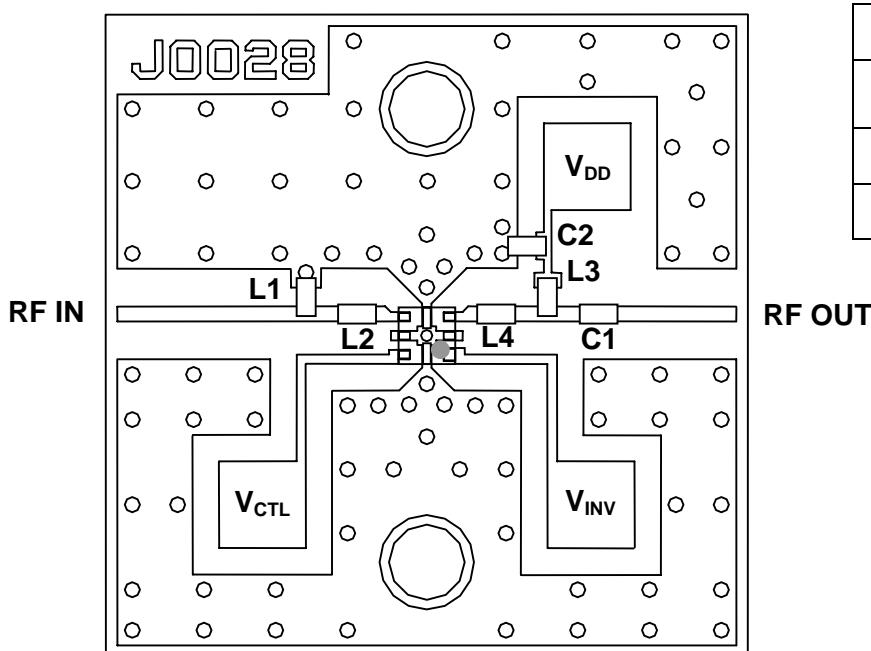


Parts ID	Comment
L1, L3,	TAIYO-YUDEN (HK1005)
L2, L4	MATUSHITA (ELJRF)
C1, C2	MURATA (GRP15)

RF OUT

PCB (FR-4) :
 $t=0.2\text{mm}$
 MICROSTRIP LINE WIDTH
 $=0.4\text{mm } (Z_0=50\Omega)$
 PCB SIZE=17.0mmx17.0mm

NJG1116HB3

■PACKAGE OUTLINE (USB8-B3)

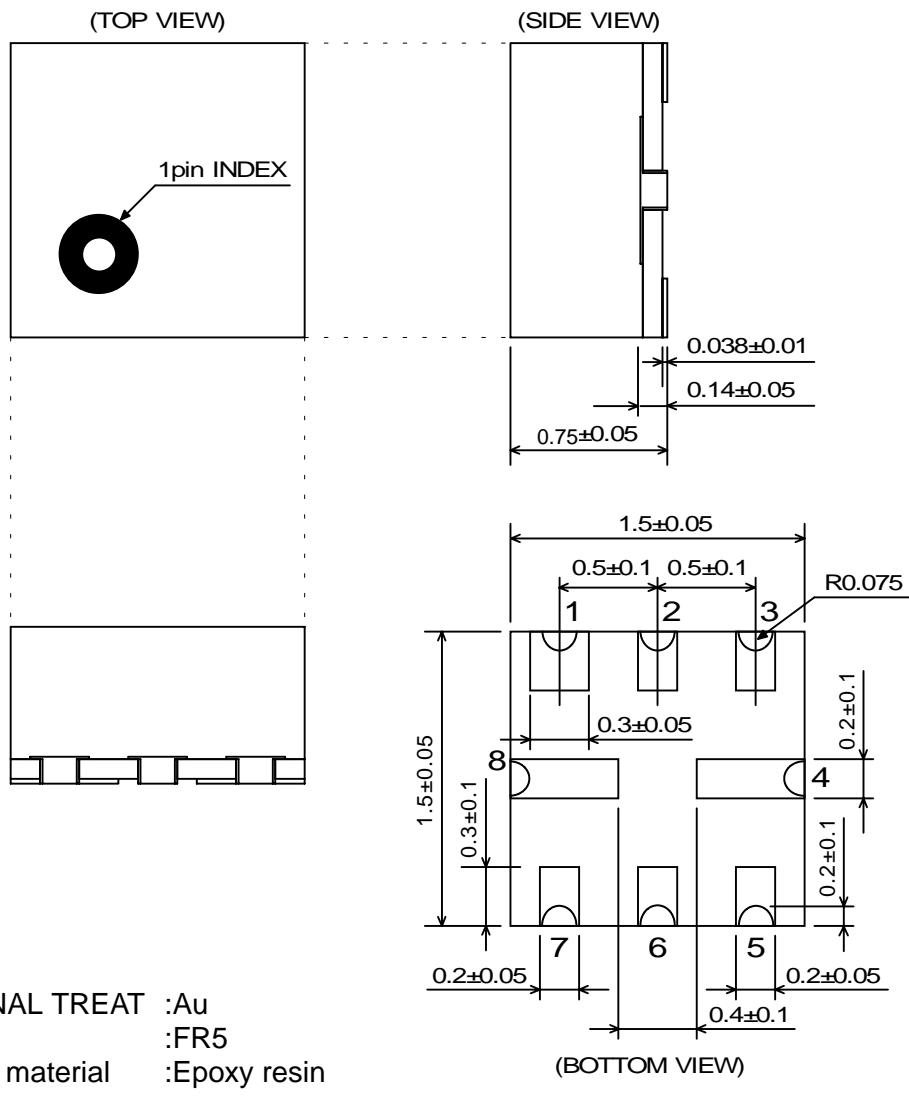

TERMINAL TREAT :Au
PCB :FR5
Molding material :Epoxy resin
UNIT :mm
WEIGHT :4mg

Cautions on using this product

This product contains Gallium-Arsenide (GaAs) which is a harmful material.

- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.