
Brighter in emergencies, lighter on your pocket.




What a bright idea. An emergency light which is more powerful yet costs less than most other lights on the market. Introducing the Fairlite, an emergency light whose quality simply shines out.

Quality is of vital importance, so all our design and production procedures adhere to the strict requirements of ISO9001/BS5750 Pt 1.

It's very stylish too. Compact, with a modern shape to enhance its low profile appearance. Plus it's easy to install and backed by our unrivalled reputation in the field of emergency lighting. In fact, the only place the Fairlite won't lighten is your pocket.

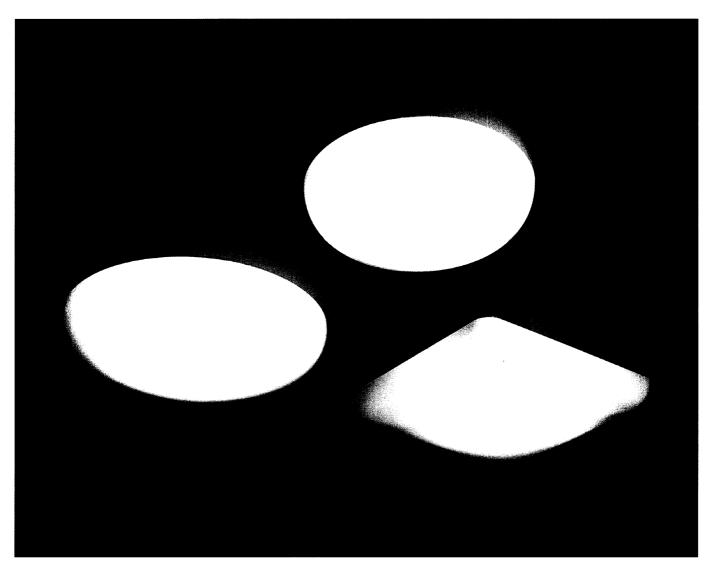



Just take a look at these features.


- Light grey body in fire retardant polycarbonate which blends in with most interiors.
- Attractive opal polycarbonate diffuser.
- Compact dimensions.
- Simple to install with quick clip-fit diffuser and gear tray.
- Mains luminaires available with 16 and 28 watt
 2D high efficiency compact fluorescent lamps.
- 3-hour emergency luminaires are also available in 4, 10, 16 and 28 watt 2D versions.

So if you're looking around for an emergency light which combines low cost with high quality, look no further than the Fairlite.



| Catalogue No. | Category | Туре | Rated Voltage | Lamp | Lamp C | |
|-----------------|----------------|----------------|----------------------|---------------------------|-----------------|------------|
| RP4/3/240 | Non-Maintained | Self Contained | 230-240v 50/60 Hz | 4 watt Fluorescent | Emergency 60 | Mains — |
| RP4/3M/240 | Maintained | Self Contained | 230-240v 50/60 Hz | 4 watt Fluorescent | 60 | 60 |
| RP10/3/240 | Non-Maintained | Self Contained | 230-240v 50/60 Hz | 10 watt Fluorescent | 210 | - |
| RP10/3M/240 | Maintained | Self Contained | 230-240v 50/60 Hz | 10 watt Fluorescent | 210 | 210 |
| RP1161/240/HPF | N/A | Mains HPF | 230-240v 50/60 Hz | 16 watt 2D Fluorescent | _ | 925 |
| RG16/3/240 | Non-Maintained | Self Contained | 230-240v 50/60 Hz | 16 watt 2D Fluorescent | 190 | - |
| RG16/3M/240 | Maintained HPF | Self Contained | 230-240v 50/60 Hz | 16 watt 2D Fluorescent | 190 | 925 |
| RG1161/240/HPF | N/A | Mains HPF | 230-240v 50/60 Hz | 16 watt 2D Fluorescent | - | 925 |
| RG 1281/240/HPF | N/A | Mains HPF | 230-240v 50/60 Hz | 28 watt 2D Fluorescent | - | 1800 |
| SG16/3/240 | Non-Maintained | Self Contained | 230-240v 50/60 Hz | 16 watt 2D Fluorescent | 190 | - |
| SG16/3M/240 | Maintained HPF | Self Contained | 230-240v 50/60 Hz | 16 watt 2D Fluorescent | 190 | 925 |
| SG28/3/240 | Non-Maintained | Self Contained | 230-240v 50/60 Hz | 28 watt 2D Fluorescent | 220 | - |
| SG28/3M/240 | Maintained HPF | Self Contained | 230-240v 50/60 Hz | 28 watt 2D Fluorescent | 220 | 1800 |
| SG1281/240/HPF | N/A | Mains HPF | 230-240v 50/60 Hz | 28 watt 2D Fluorescent | - | 1800 |

For Self Contained Luminaires emergency duration is 3 hours and battery is 3 cell.

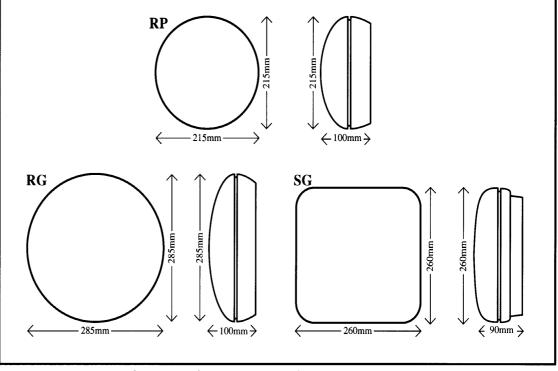

FOR MORE INFORMATION CALL OUR