

MONOLITHIC DUAL H BRIDGE DRIVER CIRCUIT

DESCRIPTION

The μ PD16818 is a monolithic dual H bridge driver IC which uses N-channel power MOS FETs in its output stage. By employing the power MOS FETs for the output stage, this driver circuit has a substantially improved saturation voltage and power consumption as compared with conventional driver circuits that use bipolar transistors.

In addition, the drive current can be adjusted by an external resistor in power-saving mode.

The μ PD16818 is therefore ideal as the driver circuit of a 2-phase excitation, bipolar-driven stepping motor for the head actuator of an FDD.

FEATURES

- Compatible with 3V-/5V- supply voltage
- Pin compatible with μ PD16803
- Low ON resistance (sum of ON resistors of top and bottom MOS FETs)
 - $R_{ON1} = 1.2 \, \Omega$ ($V_M = 3.0 \, V$)
 - $R_{ON2} = 1.0 \, \Omega$ ($V_M = 5.0 \, V$)
- Low current consumption: $I_{DD} = 0.4 \, mA$ TYP. ($V_{DD} = 2.7 \, V$ to $3.6 \, V$)
- Stop mode function that turns OFF all output MOS FETs
- Drive current can be set in power-saving mode (set by external resistor)
- Compact surface mount package

ORDERING INFORMATION

Part Number	Package
μ PD16818GS	20-pin plastic SOP (300 mil)
μ PD16818GR-8JG	20-pin plastic SSOP (225 mil)

ABSOLUTE MAXIMUM RATINGS ($T_A = 25 \, ^\circ C$)

Parameter		Symbol	Condition	Rating	Unit
Supply voltage	Motor block	V_M		-0.5 to +7.0	V
	Control block	V_{DD}		-0.5 to +7.0	
Power consumption	μ PD16818GS	P_{D1}		1.0 ^{Note 1}	W
		P_{D2}		1.25 ^{Note 2}	
	μ PD16818GR-8JG	P_{D2S}		0.79 ^{Note 2}	
Instantaneous H bridge drive current		I_D (pulse)	PW $\leq$ 5 ms, Duty $\leq$ 40 %	± 1.0 ^{Note 2}	A
Input voltage		V_{IN}		-0.5 to $V_{DD} + 0.5$	V
Operating temperature range		T_A		0 to 60	$^\circ C$
Operation junction temperature		T_J (MAX)		150	$^\circ C$
Storage temperature range		T_{stg}		-55 to +150	$^\circ C$

Notes 1. IC only

2. When mounted on a glass epoxy printed circuit board (100 mm $\times$ 100 mm $\times$ 1 mm)

The information in this document is subject to change without notice.

RECOMMENDED OPERAING CONDITIONS

Parameter		Symbol	MIN.	TYP.	MAX.	Unit
Supply voltage	Motor block	V_M	2.7		6.0	V
	Control block	V_{DD}	2.7		6.0	
Rx pin connection resistance		R_X	2			k Ω
H bridge drive current ($V_{DD} = V_M = 3$ V) ^{Note}	μ PD16818GS	I_{DR}			430	mA
	μ PD16818GR-8JG	I_{DRS}			340	
Charge pump capacitor capacitance		C_1 - C_3	5		20	nF
Operating temperature		T_A	0		60	$^{\circ}\text{C}$

Note When mounted on a glass epoxy printed circuit board (100 mm $\times$ 100 mm $\times$ 1 mm)

ELECTRICAL SPECIFICATIONS (Within recommended operating conditions unless otherwise specified)

$V_{DD} = V_M = 4.0$ V to 6.0 V

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
OFF V_M pin current	I_M	INC pin low $V_M = V_{DD} = 6$ V			1.0	μA
V_{DD} pin current	I_{DD}	Note 1		1.0	2.0	mA
High-level input current (IN_1 , IN_2 , INC)	I_{IH1}	$T_A = 25^{\circ}\text{C}$, $V_{IN} = V_{DD}$			1.0	μA
		$0 \leq T_A \leq 60^{\circ}\text{C}$, $V_{IN} = V_{DD}$			2.0	
Low-level input current (IN_1 , IN_2 , INC)	I_{IL1}	$T_A = 25^{\circ}\text{C}$, $V_{IN} = 0$			-0.15	mA
		$0 \leq T_A \leq 60^{\circ}\text{C}$, $V_{IN} = 0$			-0.2	
PS pin high-level input current	I_{IH2}	$T_A = 25^{\circ}\text{C}$, $V_{IN} = V_{DD}$			0.15	mA
		$0 \leq T_A \leq 60^{\circ}\text{C}$, $V_{IN} = V_{DD}$			0.2	
PS pin low-level input voltage	I_{IL2}	$T_A = 25^{\circ}\text{C}$, $V_{IN} = 0$			-1.0	μA
		$0 \leq T_A \leq 60^{\circ}\text{C}$, $V_{IN} = 0$			-2.0	
Input pull-up resistance (IN_1 , IN_2 , INC)	R_{INU}	$T_A = 25^{\circ}\text{C}$	35	50	65	k Ω
		$0 \leq T_A \leq 60^{\circ}\text{C}$	25		75	
PS pin input pull-down resistance	R_{IND}	$T_A = 25^{\circ}\text{C}$	35	50	65	k Ω
		$0 \leq T_A \leq 60^{\circ}\text{C}$	25		75	
Control pin high-level input voltage	V_{IH}		3.0		$V_{DD} + 0.3$	V
Control pin low-level input voltage	V_{IL}		-0.3		0.8	V
H bridge ON resistance ^{Note 2}	R_{ON2}	$V_{DD} = V_M = 5$ V		1.0	2.0	Ω
R_{ON} relative accuracy	ΔR_{ON}	Excitation direction <1>, <3>			± 15	%
		Excitation direction <2>, <4> ^{Note 3}			± 5	
Charge pump circuit turn ON time	t_{ONG}	$V_{DD} = V_M = 5$ V		0.3	2.0	ms
H bridge turn ON time	t_{ONH}	$C_1 = C_2 = C_3 = 10$ nF $R_M = 20$ Ω			2.0	μs
H bridge turn OFF time	t_{OFFH}				5.0	μs

Notes 1. When $IN_1 = IN_2 = INC = \text{"H"}$, $PS = \text{"L"}$

2. Sum of ON resistances of top and bottom MOS FETs

3. For the excitation direction, refer to **FUNCTION TABLE**.

ELECTRICAL SPECIFICATIONS (Within recommended operating conditions unless otherwise specified)

$V_{DD} = V_M = 2.7 \text{ V to } 3.6 \text{ V}$

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
OFF V_M pin current	I_M	INC pin low $V_M = V_{DD} = 3.6 \text{ V}$			1.0	μA
V_{DD} pin current	I_{DD}	Note 1		0.4	1.0	mA
High-level input current (IN_1 , IN_2 , INC)	I_{IH1}	$T_A = 25 \text{ }^\circ\text{C}$, $V_{IN} = V_{DD}$			1.0	μA
		$0 \leq T_A \leq 60 \text{ }^\circ\text{C}$, $V_{IN} = V_{DD}$			2.0	
Low-level input current (IN_1 , IN_2 , INC)	I_{IL1}	$T_A = 25 \text{ }^\circ\text{C}$, $V_{IN} = 0$			-0.09	mA
		$0 \leq T_A \leq 60 \text{ }^\circ\text{C}$, $V_{IN} = 0$			-0.12	
PS pin high-level input current	I_{IH2}	$T_A = 25 \text{ }^\circ\text{C}$, $V_{IN} = V_{DD}$			0.09	mA
		$0 \leq T_A \leq 60 \text{ }^\circ\text{C}$, $V_{IN} = V_{DD}$			0.12	
PS pin low-level input voltage	I_{IL2}	$T_A = 25 \text{ }^\circ\text{C}$, $V_{IN} = 0$			-1.0	μA
		$0 \leq T_A \leq 60 \text{ }^\circ\text{C}$, $V_{IN} = 0$			-2.0	
Input pull-up resistance (IN_1 , IN_2 , INC)	R_{INU}	$T_A = 25 \text{ }^\circ\text{C}$	35	50	65	k Ω
		$0 \leq T_A \leq 60 \text{ }^\circ\text{C}$	25		75	
PS pin input pull-down resistance	R_{IND}	$T_A = 25 \text{ }^\circ\text{C}$	35	50	65	k Ω
		$0 \leq T_A \leq 60 \text{ }^\circ\text{C}$	25		75	
Control pin high-level input voltage	V_{IH}		2.0		$V_{DD} + 0.3$	V
Control pin low-level input voltage	V_{IL}		-0.3		0.8	V
H bridge ON resistance Note 2	R_{ON1}	$V_{DD} = V_M = 3 \text{ V}$		1.2	2.4	Ω
R_{ON} relative accuracy	ΔR_{ON}	Excitation direction <1>, <3>			± 15	%
		Excitation direction <2>, <4> Note 3			± 5	
V_x voltage in power-saving mode Note 4	V_x	$V_{DD} = V_M = 3 \text{ V}$ $R_x = 270 \text{ k}\Omega$	1.0	1.2	1.4	V
V_x relative accuracy in power-saving mode	ΔV_x	Excitation direction <1>, <3>			± 5	%
		Excitation direction <2>, <4>			± 5	
Charge pump circuit turn ON time	t_{ONG}	$V_{DD} = V_M = 3 \text{ V}$		0.3	2.0	ms
H bridge turn ON time	t_{ONH}	$C_1 = C_2 = C_3 = 10 \text{ nF}$			2.0	μs
H bridge turn OFF time	t_{OFFH}	$R_M = 20 \text{ }\Omega$			5.0	μs

Notes 1. When $IN_1 = IN_2 = INC = \text{"H"}$, PS = "L"

2. Sum of ON resistances of top and bottom MOS FETs


3. For the excitation direction, refer to **FUNCTION TABLE**.

4. V_x is a voltage at point A (FORWARD) or B (REVERSE) of the H bridge in **FUNCTION TABLE**.

PIN CONFIGURATION (Top View)

20-pin plastic SOP (300 mil)

20-pin plastic SSOP (225 mil)


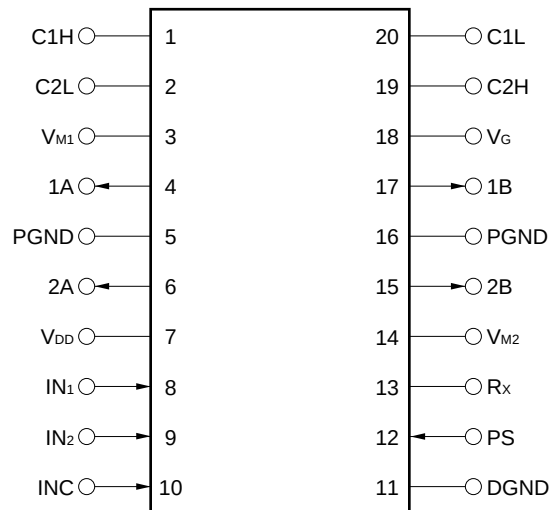


FUNCTION TABLE


Excitation Direction	INc	IN1	IN2	H1	H2
<1>	H	H	H	F	F
<2>	H	L	H	R	F
<3>	H	L	L	F	R
<4>	H	H	L	R	R
—	L	x	x	Stop	

F: FORWARD

R: REVERSE

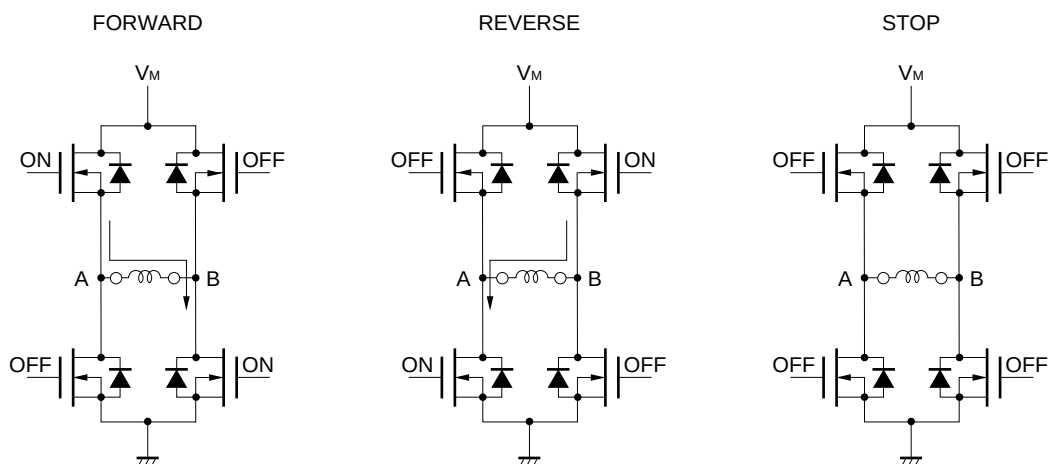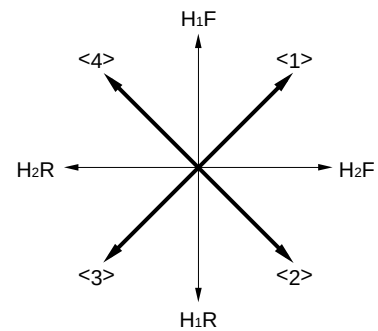

BLOCK DIAGRAM

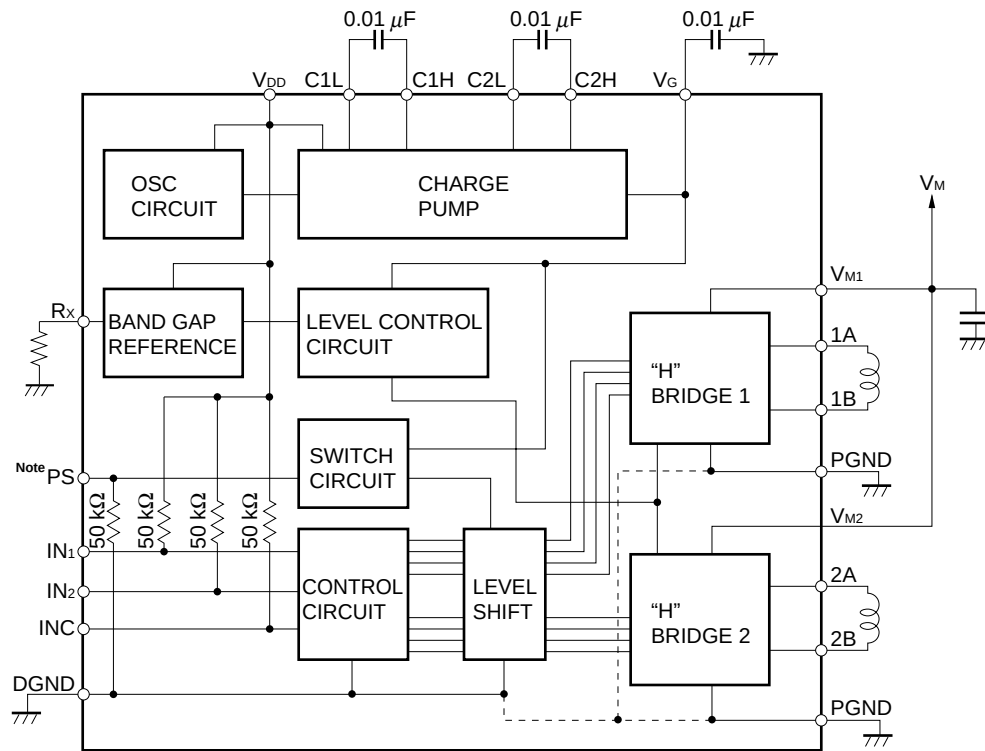


Note The power-saving mode is set when the PS pin goes high. In this mode, the voltage of the charge pump circuit is lowered and the ON resistance of the H bridge driver transistor increases, limiting the current.


Remark ----- is connected in diffusion layer.

CHARACTERISTIC CURVES


P_D vs. T_A Characteristics (μ PD16818GS)

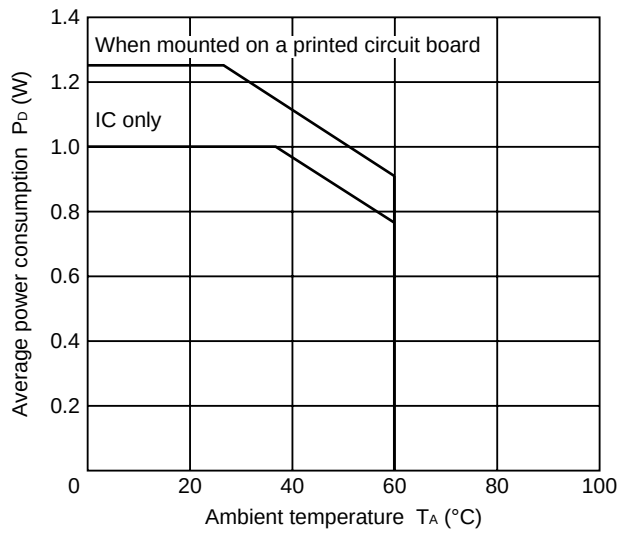


P_D vs. T_A Characteristics (μ PD16818GR-8JG)




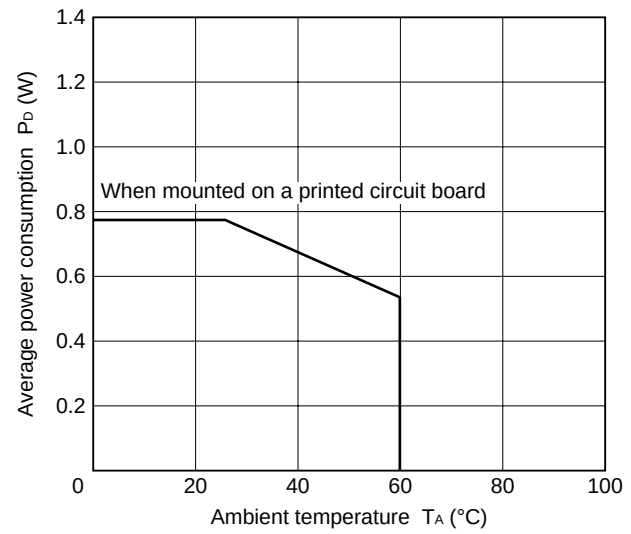






I_{DD} vs. T_A Characteristics




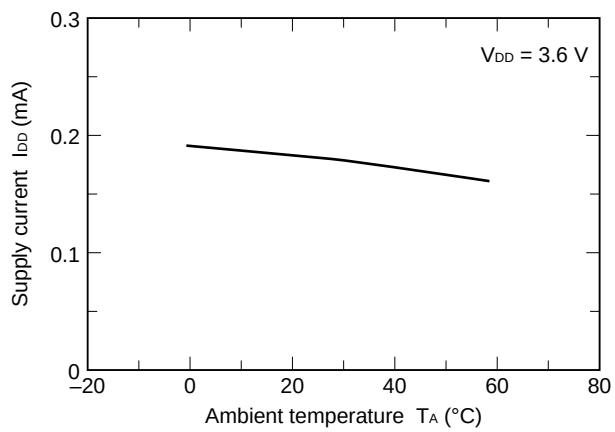






I_{DD} vs. T_A Characteristics




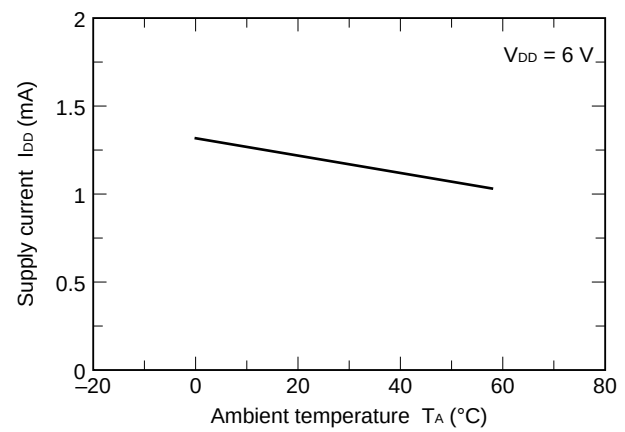


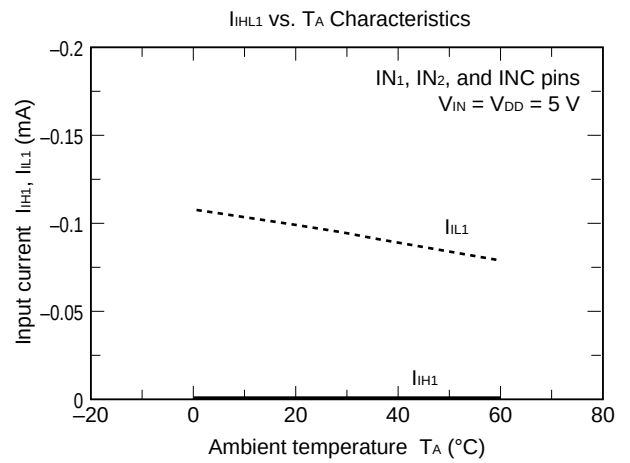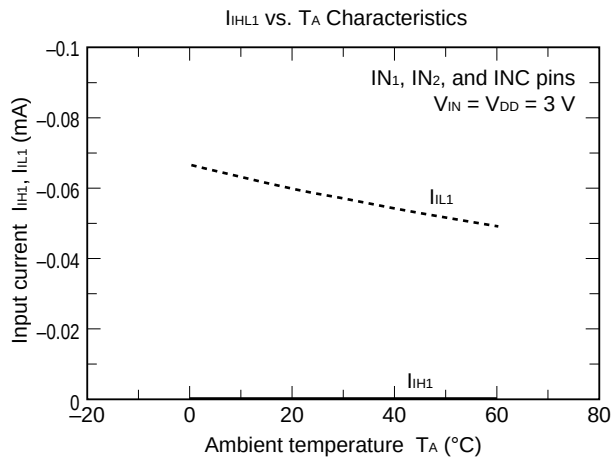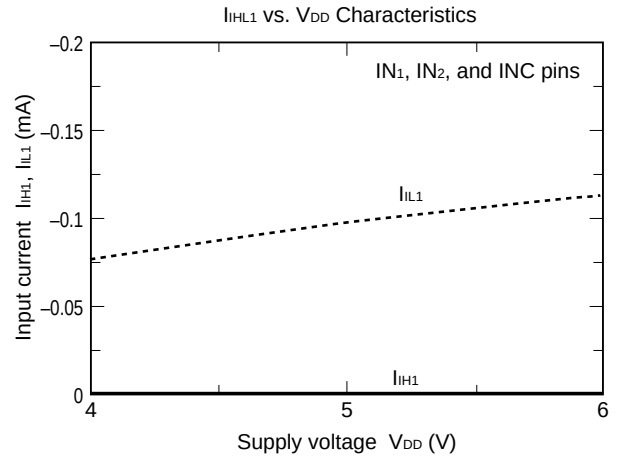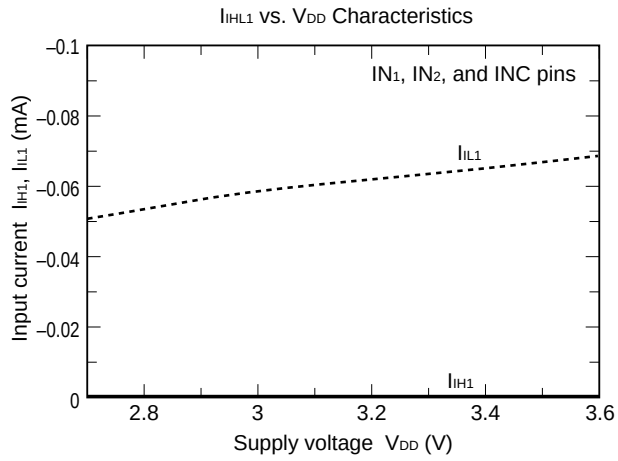

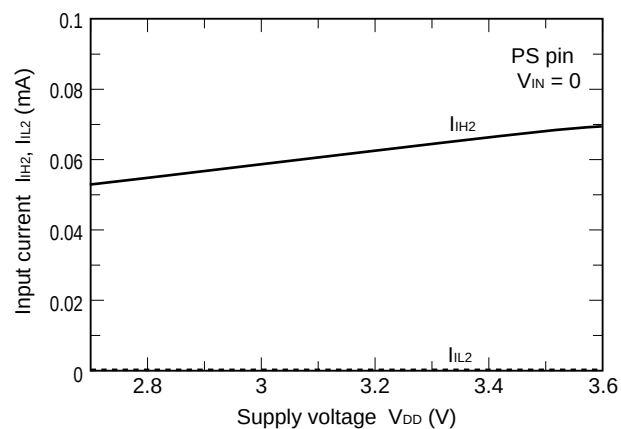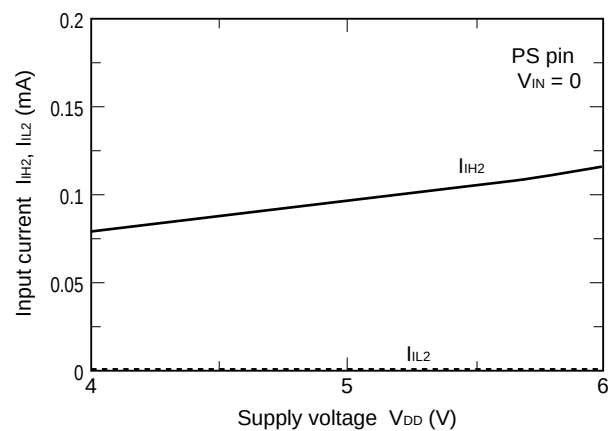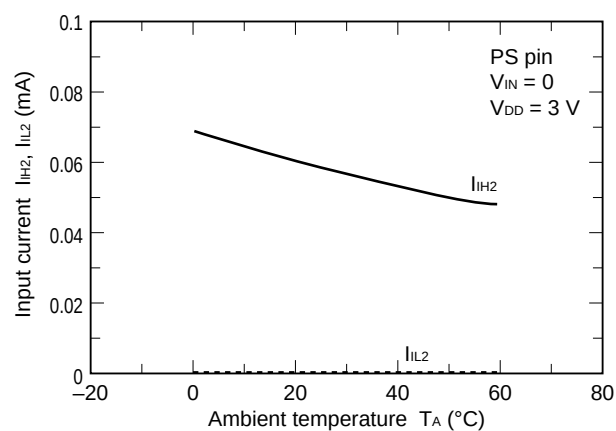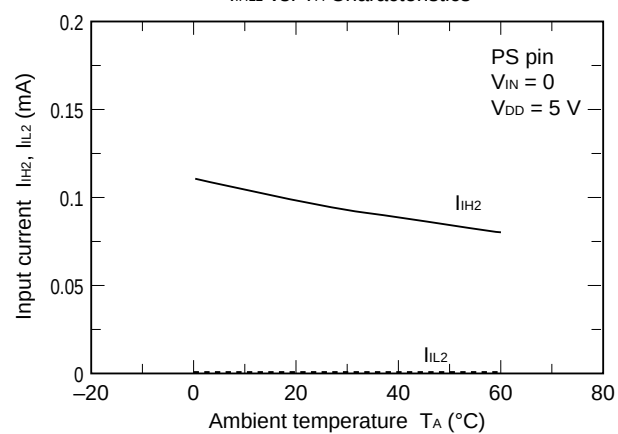I_{IH2} vs. V_{DD} Characteristics I_{IH2} vs. V_{DD} Characteristics I_{IH2} vs. T_A Characteristics I_{IH2} vs. T_A Characteristics

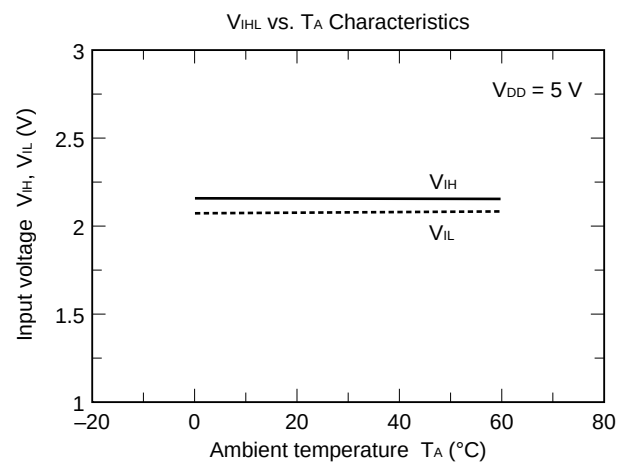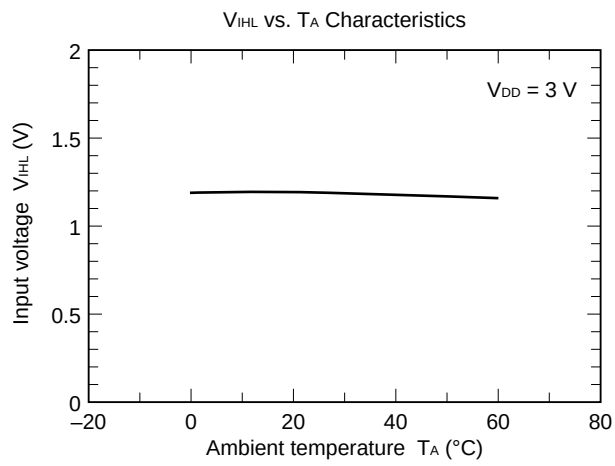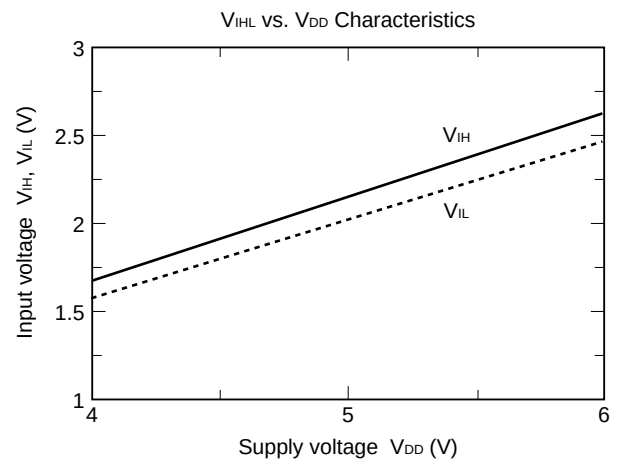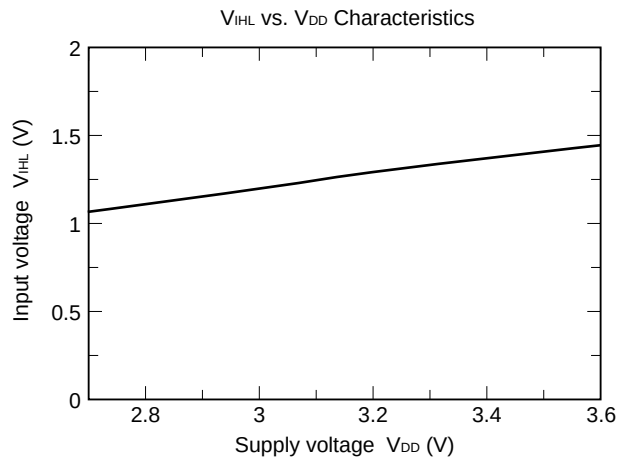


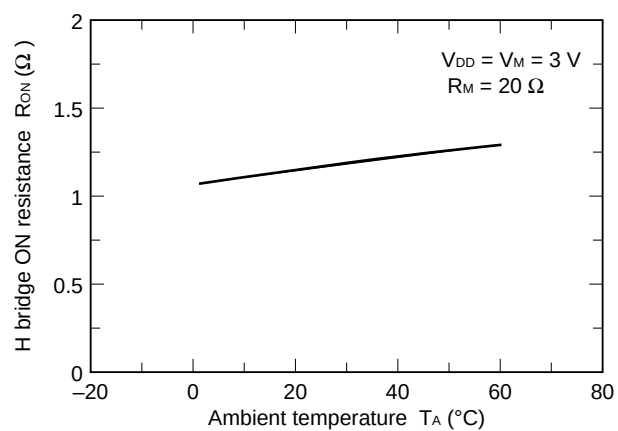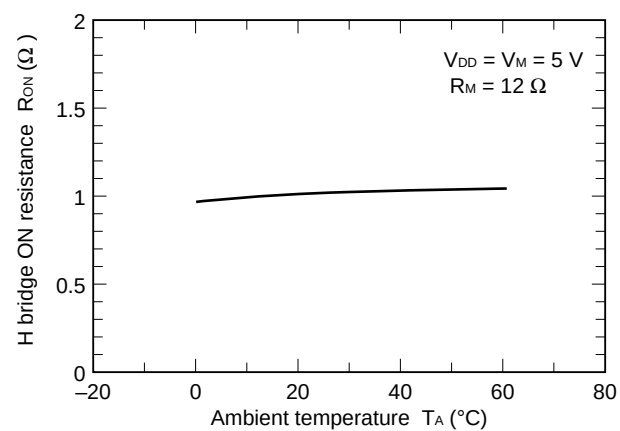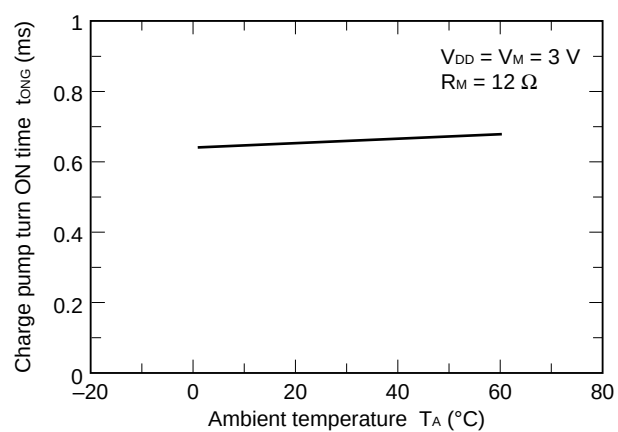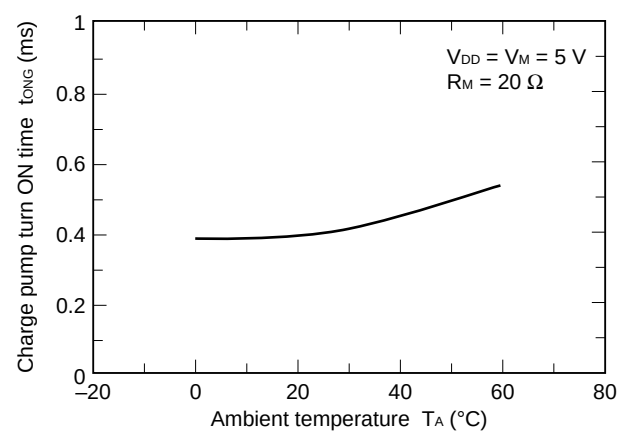R_{ON} vs. T_A CharacteristicsR_{ON} vs. T_A Characteristicst_{ON} vs. T_A Characteristicst_{ON} vs. T_A Characteristics

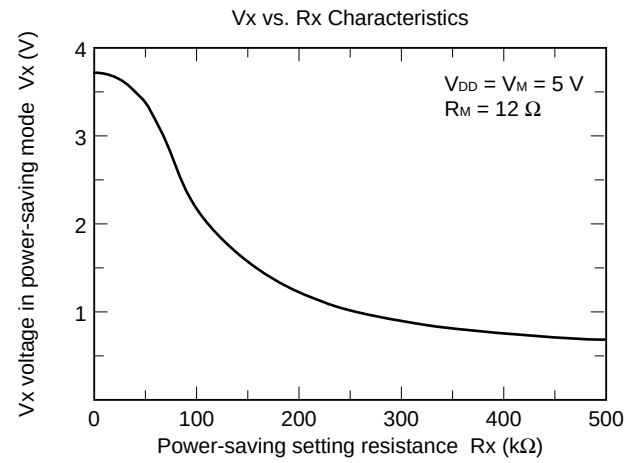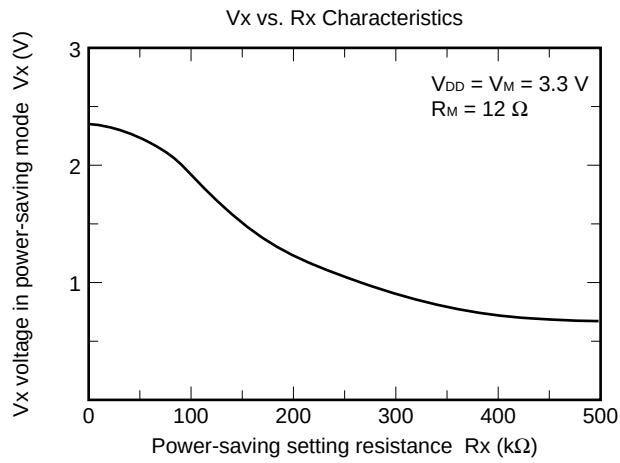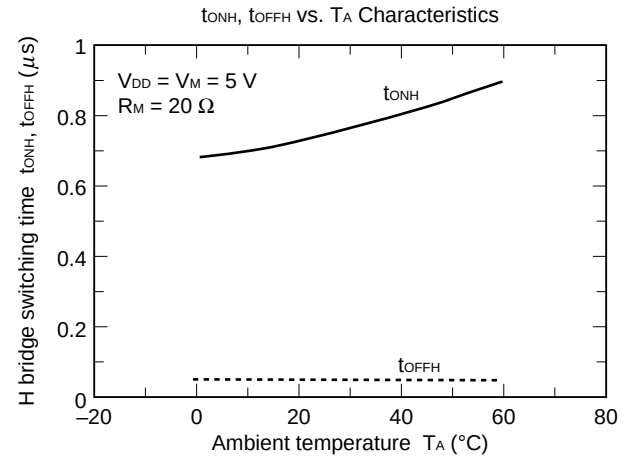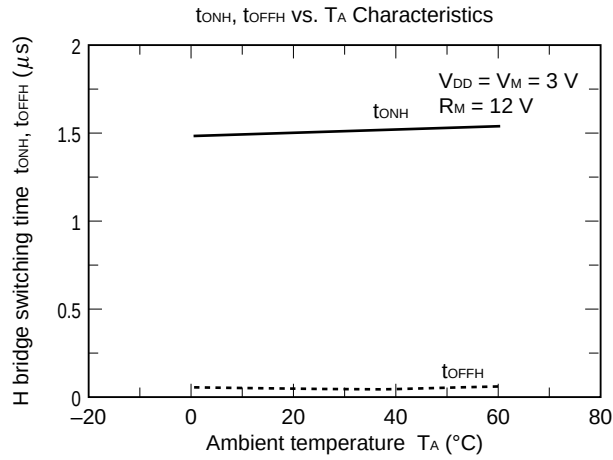

PACKAGE DRAWINGS

20 PIN PLASTIC SOP (300 mil)

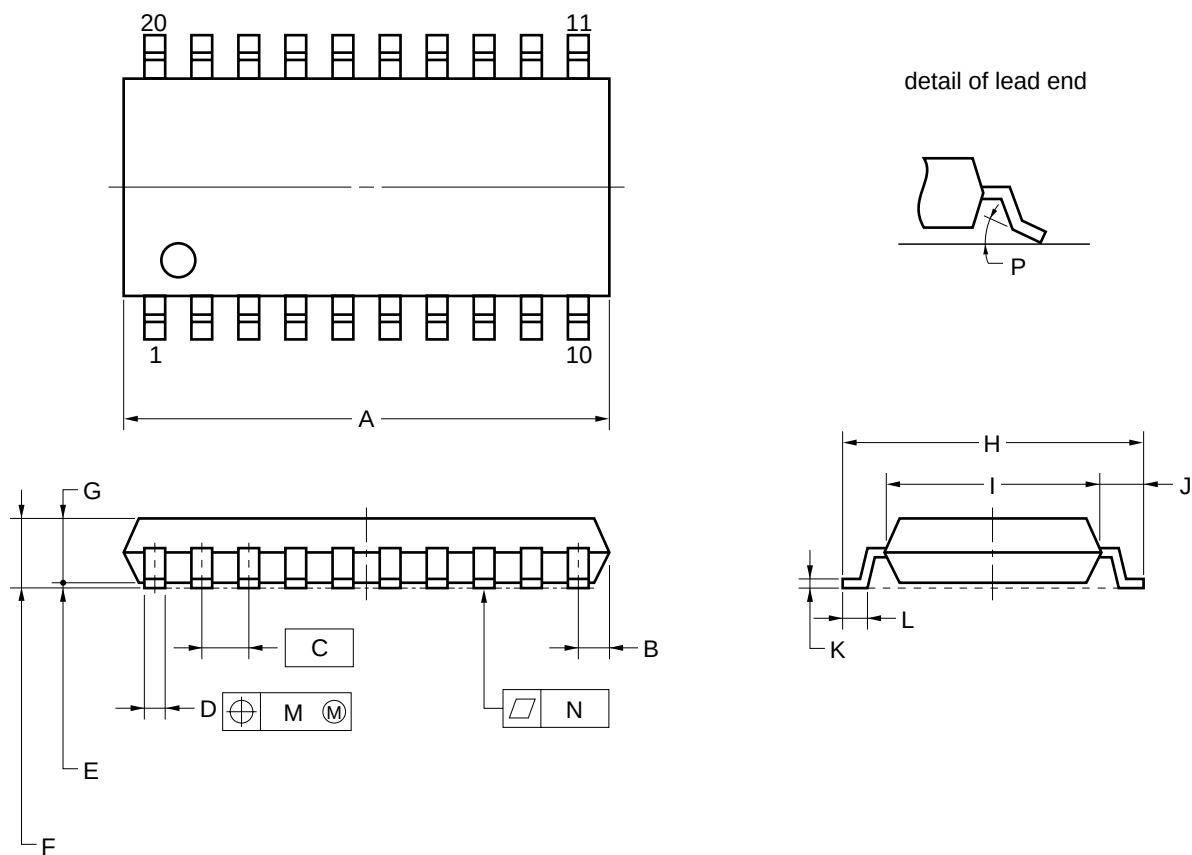


NOTE

Each lead centerline is located within 0.12 mm (0.005 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	12.7±0.3	0.500±0.012
B	0.78 MAX.	0.031 MAX.
C	1.27 (T.P.)	0.050 (T.P.)
D	0.42 ^{+0.08} _{-0.07}	0.017 ^{+0.003} _{-0.004}
E	0.1±0.1	0.004±0.004
F	1.8 MAX.	0.071 MAX.
G	1.55±0.05	0.061±0.002
H	7.7±0.3	0.303±0.012
I	5.6±0.2	0.220 ^{+0.009} _{-0.008}
J	1.1	0.043
K	0.22 ^{+0.08} _{-0.07}	0.009 ^{+0.003} _{-0.004}
L	0.6±0.2	0.024 ^{+0.008} _{-0.009}
M	0.12	0.005
N	0.10	0.004
P	3° ^{+7°} _{-3°}	3° ^{+7°} _{-3°}

P20GM-50-300B, C-5

20 PIN PLASTIC SHRINK SOP (225mil)

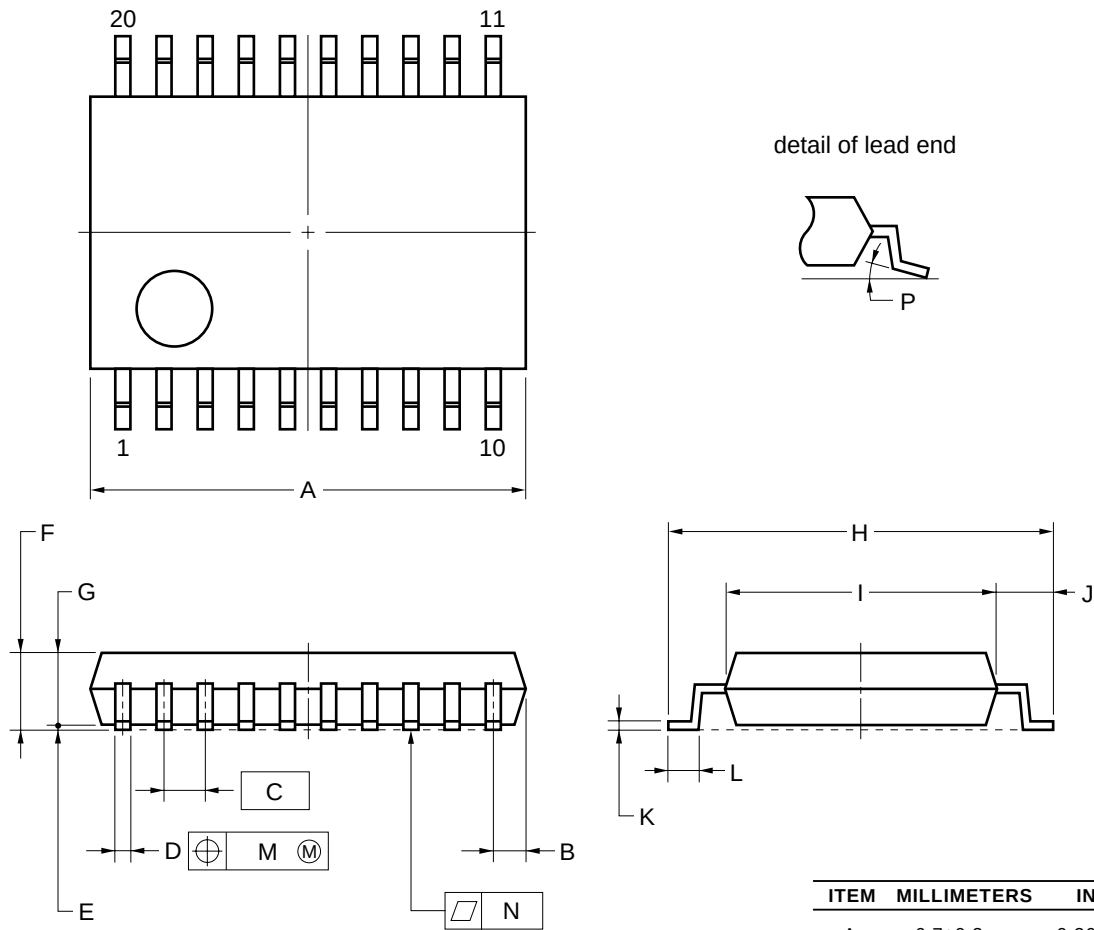**NOTE**

Each lead centerline is located within 0.10 mm (0.004 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	6.7±0.3	0.264 ^{+0.012} _{-0.013}
B	0.575 MAX.	0.023 MAX.
C	0.65 (T.P.)	0.026 (T.P.)
D	0.22 ^{+0.10} _{-0.05}	0.009 ^{+0.004} _{-0.003}
E	0.1±0.1	0.004±0.004
F	1.45 MAX.	0.057 MAX.
G	1.15±0.1	0.045 ^{+0.005} _{-0.004}
H	6.4±0.2	0.252±0.008
I	4.4±0.1	0.173 ^{+0.005} _{-0.004}
J	1.0±0.2	0.039 ^{+0.009} _{-0.008}
K	0.15 ^{+0.10} _{-0.05}	0.006 ^{+0.004} _{-0.002}
L	0.5±0.2	0.020 ^{+0.008} _{-0.009}
M	0.10	0.004
N	0.10	0.004
P	3°+7° _{-3°}	3°+7° _{-3°}

P20GR-65-225C-2

RECOMMENDED SOLDERING CONDITIONS

Solder this product under the following recommended conditions.

For details of the recommended soldering conditions, refer to information document **Semiconductor Device Mounting Technology Manual (C10535E)**.

Surface Mount Type

μPD16818GS 20-pin plastic SOP (300 mil)

μPD16818GR-8JG 20-pin plastic SSOP (225 mil)

Soldering Method	Soldering Conditions	Symbol of Recommended Soldering
Infrared reflow	Package peak temperature: 235°C, Time: 30 seconds MAX.(210°C MIN.), Number of times: 3 MAX., Number of days: None ^{Note} , Flux: Rosin-based flux with little chlorine component (chlorine: 0.2 Wt% MAX.)	IR35-00-3
VPS	Package peak temperature: 215°C, Time: 40 seconds MAX.(200°C MIN.), Number of times: 3 MAX., Number of days: None ^{Note} , Flux: Rosin-based flux with little chlorine component (chlorine: 0.2 Wt% MAX.)	VP15-00-3
Wave soldering	Package peak temperature: 260°C, Time: 10 seconds MAX., Preheating temperature: 120 °C MAX., Number of times: 1, Flux: Rosin-based flux with little chlorine component (chlorine: 0.2 Wt% MAX.)	WS60-00-1

Note Number of days in storage after the dry pack has been opened. The storage conditions are at 25 °C, 65 % RH MAX.

Caution Do not use two or more soldering methods in combination.

[MEMO]

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.