

# E-Series RF 49:1 Transformer

## 5 - 50 MHz

**ETC49-1**

V2.00


### Features

- \* 49:1 Impedance Ratio


### Specifications @ 25°C

Frequency Range	5 - 50 MHz
Insertion Loss 5-50 MHz	Maximum 1.8 dB

SM-22

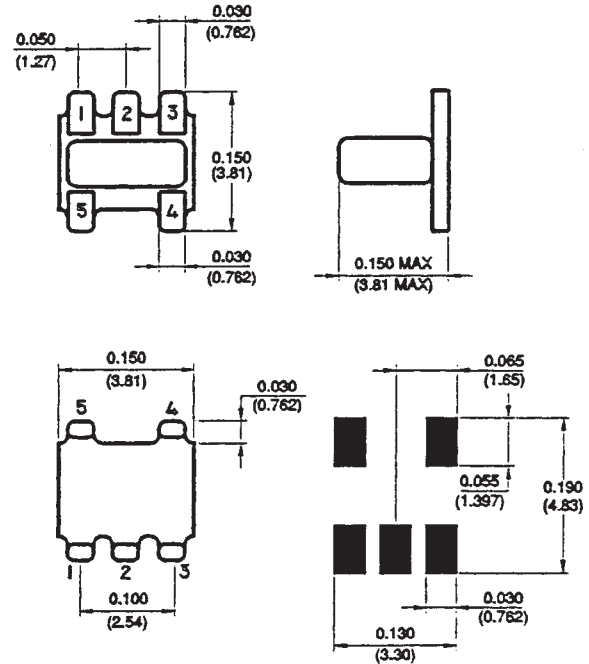

### Schematic



### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temp.	-20°C to +85°C

Function	Pin No.
Primary dot	3
Primary	1
Primary CT	-
Secondary dot	2
Secondary	4
Secondary CT	-
Case Ground	-
Not Connected	4,5

S 1056 A

Specifications Subject to Change Without Notice.