

## 5A LOW DROPOUT POSITIVE REGULATOR

IL1084-XX


**Features**

- ◆ Output Current : 5A
- ◆ Maximum Input Voltage : 12V
- ◆ Adjustable Output Voltage or Fixed 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 3.6V, 5V
- ◆ Current Limiting and Thermal Protection
- ◆ Standard 3-Pin Power Packages


**Applications**

- ◆ Post Regulator for Switching DC/DC Converter
- ◆ High Efficiency Liner Regulators
- ◆ Battery Charger


TO-220



TO-252



TO-263



1. ADJ/GND
2. Output
3. Input

**Absolute Maximum Ratings (Note 1)**

Power Dissipation (Note 2)

Internally Limited Junction Temperature (Note 3) 150°C

Storage Temperature Range -65°C to 150°C

**Operating Ratings**

Junction Temperature Range (Note 3) -10°C to 125°C



IK Semiconductor

# TECHNICAL DATA

---

## ELECTRICAL CHARACTERISTICS

Typicals and limits appearing in normal type apply for  $T_j = +25^\circ\text{C}$ .

Limits appearing in **Boldface** type apply over the entire junction temperature range for operation.

Symbol	Parameter	Conditions	Min (Note 5)	Typ (Note 4)	Max (Note 5)	Units
V <sub>OUT</sub>	Output Voltage <b>(Note 6)</b> IL1084–Adj BT2	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =4.25V 0≤I <sub>OUT</sub> ≤IFULL LOAD 2.75V≤V <sub>IN</sub> ≤10V	1.237 1.232 1.225	1.250 1.250 1.250	1.263 1.268 1.275	V
	IL1084–1.5 BT2	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =4.5V 0≤I <sub>OUT</sub> ≤IFULL LOAD 3.0V≤V <sub>IN</sub> ≤10V	1.485 1.478 1.470	1.500 1.500 1.500	1.515 1.522 1.530	
	IL1084–1.8 BT2	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =4.8V 0≤I <sub>OUT</sub> ≤IFULL LOAD 3.3V≤V <sub>IN</sub> ≤10V	1.782 1.773 1.764	1.800 1.800 1.800	1.818 1.827 1.836	
	IL1084–2.5 BT2	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =5.5V 0≤I <sub>OUT</sub> ≤IFULL LOAD 4.0V≤V <sub>IN</sub> ≤10V	2.475 2.463 2.450	2.500 2.500 2.500	2.525 2.537 2.550	
	IL1084–2.85 BT2	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =5.85V 0≤I <sub>OUT</sub> ≤IFULL LOAD 4.35V≤V <sub>IN</sub> ≤10V	2.820 2.805 2.790	2.850 2.850 2.850	2.880 2.895 2.910	
	IL1084–3.3 BT2	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =6.3V 0≤I <sub>OUT</sub> ≤IFULL LOAD 4.8V≤V <sub>IN</sub> ≤10V	3.270 3.250 3.235	3.300 3.300 3.300	3.330 3.350 3.365	
	IL1084–3.6 BT2	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =6.6V 0≤I <sub>OUT</sub> ≤IFULL LOAD 5.1V≤V <sub>IN</sub> ≤10V	3.564 3.546 3.528	3.600 3.600 3.600	3.636 3.654 3.672	
	IL1084–5.0 BT2	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =8.0V 0≤I <sub>OUT</sub> ≤IFULL LOAD 6.5V≤V <sub>IN</sub> ≤10V	4.950 4.925 4.900	5.000 5.000 5.000	5.050 5.075 5.100	



IK Semiconductor

# TECHNICAL DATA

---

## ELECTRICAL CHARACTERISTICS

Typicals and limits appearing in normal type apply for  $T_j = +25^\circ\text{C}$ .

Limits appearing in **Boldface** type apply over the entire junction temperature range for operation.

Symbol	Parameter	Conditions	Min (Note 5)	Typ (Note 4)	Max (Note 5)	Units
$\Delta V_{OUT}$	Line Regulation <b>(Note 7)</b> IL1084-Adj BT2	$I_{OUT}=10\text{mA}, 2.75\text{V} \leq V_{IN} \leq 10\text{V}$	—	—	0.3 0.4	%
	IL1084-1.5 BT2	$I_{OUT}=10\text{mA}, 3.0\text{V} \leq V_{IN} \leq 10\text{V}$	—	—	6	mV
	IL1084-1.8 BT2	$I_{OUT}=10\text{mA}, 3.3\text{V} \leq V_{IN} \leq 10\text{V}$	—	—	6	
	IL1084-2.5 BT2	$I_{OUT}=10\text{mA}, 4.0\text{V} \leq V_{IN} \leq 10\text{V}$	—	—	6	
	IL1084-2.85 BT2	$I_{OUT}=10\text{mA}, 4.35\text{V} \leq V_{IN} \leq 10\text{V}$	—	—	6	
	IL1084-3.3 BT2	$I_{OUT}=10\text{mA}, 4.8\text{V} \leq V_{IN} \leq 10\text{V}$	—	—	6	
	IL1084-3.6 BT2	$I_{OUT}=10\text{mA}, 5.1\text{V} \leq V_{IN} \leq 10\text{V}$	—	—	6	
	IL1084-5.0 BT2	$I_{OUT}=10\text{mA}, 6.5\text{V} \leq V_{IN} \leq 10\text{V}$	—	—	6	
$\Delta V_{OUT}$	Load Regulation <b>(Note 7)</b> IL1084-Adj BT2	$V_{IN}=4.25\text{V}, 0 \leq I_{OUT} \leq I_{FULL\ LOAD}$	—	—	0.3 0.4	%
	IL1084-1.5 BT2 IL1084-1.8 BT2 IL1084-2.5 BT2 IL1084-2.85 BT2	$V_{IN}=5.0\text{V}, 0 \leq I_{OUT} \leq I_{FULL\ LOAD}$	—	—	12 20	mV
	IL1084-3.3 BT2	$V_{IN}=5.0\text{V}, 0 \leq I_{OUT} \leq I_{FULL\ LOAD}$	—	—	15 20	
	IL1084-3.6 BT2	$V_{IN}=5.3\text{V}, 0 \leq I_{OUT} \leq I_{FULL\ LOAD}$	—	—	15 25	
	IL1084-5.0 BT2	$V_{IN}=8.0\text{V}, 0 \leq I_{OUT} \leq I_{FULL\ LOAD}$	—	—	20 35	
$\Delta V$	Dropout Voltage <b>(Note 8)</b>	$\Delta V_{REF}=1\%, I_{OUT}=5\text{A}$	—	—	1.5	V
$I_{O(MIN)}$	Minimum Load Current	$V_{IN}=10\text{V}$	—	—	10	mA
$I_{LIMIT}$	Current Limit	$V_{IN}=6.25\text{V}$	5.5	—	—	A
$I_{ADJ}$	Adjust Pin Current	$V_{IN}=2.75 \div 10\text{V}, I_{OUT}=10\text{mA}$	—	—	120	$\mu\text{A}$
$\Delta I_{ADJ}$	Adjust Pin Current Change	$I_{OUT}=10\text{mA} \div 5\text{A}, V_{IN}=2.75 \div 10\text{V}$	—	—	5	$\mu\text{A}$
RR	Ripple Rejection	$f_{RIPPLE} = 120\text{Hz}, C_{OUT}=25\mu\text{F}$ Tantalum, $I_{out}=5\text{A}; V_{IN}=4.25\text{V}$	60	—	—	dB
S	Temperature Stability		—	0.5	—	%

**NOTES 1:** Rating indicate conditions for which the device is intended to be functional, but specific performance is not Guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

**NOTES 2:** Power Dissipation is kept in a safe range by current limiting circuitry. Refer to Overload Recovery in Application Notes. **NOTES 3:** The maximum power dissipation is a function of  $T_j(\text{MAX})$ ,  $\Theta_{jA}$  and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $PD=(T_j(\text{MAX}) - T_A)\Theta_{jA}$ . **NOTES 4:** Typical Values represent the most likely parametric norm **NOTES 5:** All limits are guaranteed by testing or statistical analysis


**NOTES 6:** IFULL LOAD is defined in the current limit curves. The IFULL LOAD curve defines the current limit as function

**NOTES 7:** Load and Line regulation are measured at constant junction temperature, and are guaranteed up to the maximum power dissipation of 30W. Power dissipation is determined by the input/output differential and the output current. Guaranteed maximum power dissipation will not be available over the full input/output range. **NOTES 8:** Dropout voltage is specified over the full output current range of the device




IK Semiconductor

## TO-252-2L PACKAGE OUTLINE DIMENSIONS

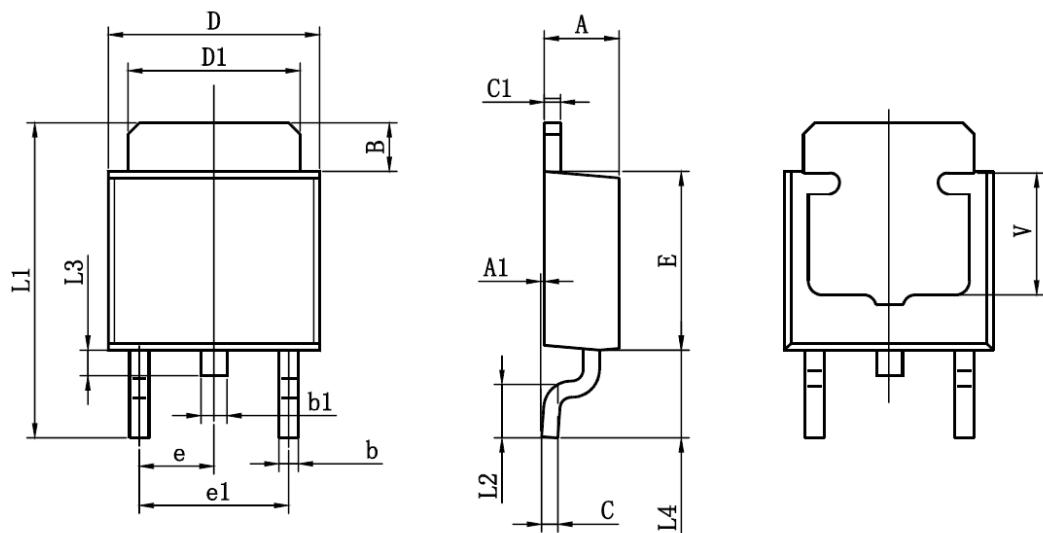


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L1	9.500	9.900	0.374	0.390
L2	1.400	1.780	0.055	0.070
L3	0.650	0.950	0.026	0.037
L4	2.550	2.900	0.100	0.114
V	3.80REF		0.150REF	

## TO-220-3L PACKAGE OUTLINE DIMENSIONS

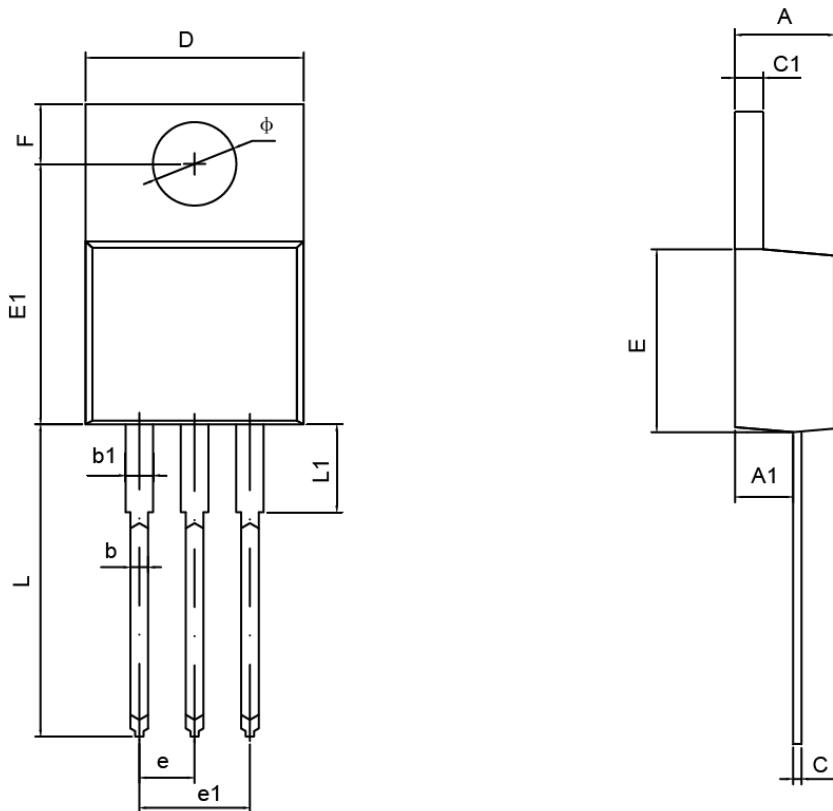

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.710	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540TYP		0.100TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
φ	3.790	3.890	0.149	0.153

## TO-263-3L PACKAGE OUTLINE DIMENSIONS

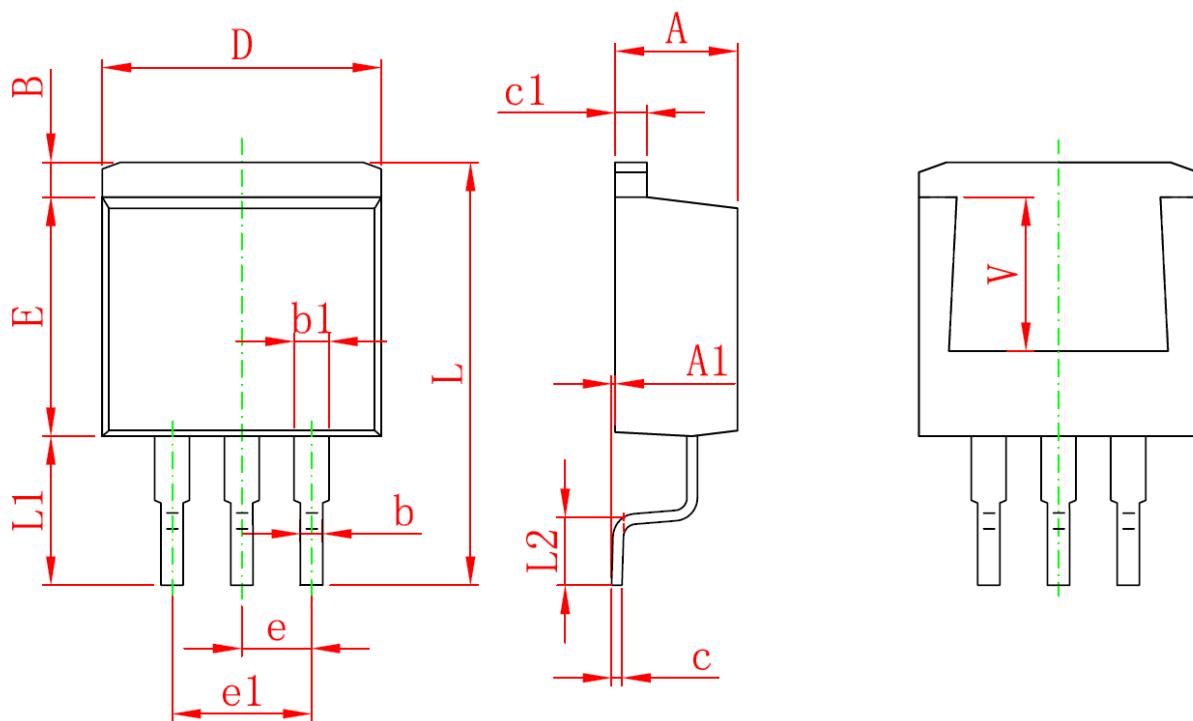

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.170	1.370	0.046	0.054
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
L	15.050	15.450	0.593	0.608
L1	5.080	5.480	0.200	0.216
L2	2.340	2.740	0.092	0.108
V	5.600 REF		0.220 REF	