


L78N00 Series



3038A

Monolithic Linear IC

5 to 24V 0.5A 3-Pin Voltage Regulator

©1166C

Use

- General-purpose voltage regulators

Features

- Output voltage

L78N05:5V	L78N06:6V	L78N07:7V	L78N08:8V
L78N09:9V	L78N10:10V	L78N12:12V	L78N15:15V
L78N18:18V	L78N20:20V	L78N24:24V	
- 500mA output
- On-chip thermal protector
- On-chip overcurrent limiter
- On-chip ASO protector
- The SEP-3H package facilitates easy mounting and thermal design as in case of transistor.

[Common to L78N00 series]

Maximum Ratings at Ta=25°C

			unit
Maximum Supply Voltage	V_{CC} max	Pin 1	35 V
Allowable Power Dissipation	P_d max		1.2 W
Operating Temperature	T_{opg}		-20 to +80 °C
Storage Temperature	T_{stg}		-40 to +150 °C

[L78N05]

Recommended Operating Conditions at Ta=25°C


		unit
Input Voltage	V_{IN}	7.5 to 20 V
Output Current	I_{OUT}	5 to 500 mA

Operating Characteristics at Ta=25°C, $V_{IN}=10V$, $I_{OUT}=350mA$, See specified Test Circuit.


		min	typ	max	unit
Output Voltage	V_{OUT}	4.8	5.0	5.2	V
Line Regulation	ΔV_{oline}		3.0	50	mV
	$T_j=25^\circ C, 7V \leq V_{IN} \leq 25V,$ $I_{OUT}=200mA$				
	$T_j=25^\circ C, 8V \leq V_{IN} \leq 20V,$ $I_{OUT}=200mA$	1.0	25		mV
Load Regulation	ΔV_{oload}			100	mV
	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 500mA$				
	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 200mA$			50	mV

Continued on next page.

Equivalent Circuit Diagram

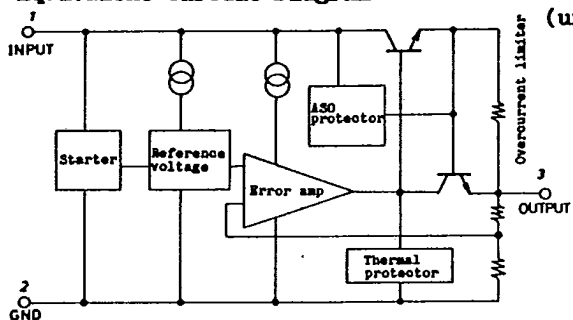

Case Outline 3038A-S3CTR (unit:mm)



8017TA/8055MW/8062KI, TS No.1166-1/8

L78N00 Series

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Output Voltage	V_{OUT}	$7V \leq V_{IN} \leq 20V$, $5mA \leq I_{OUT} \leq 350mA$ $T_j = 25^\circ C$	4.75		5.25	V
Current Dissipation	I_{CC}	$T_j = 25^\circ C$		4.5	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$8V \leq V_{IN} \leq 25V$, $I_{OUT} = 200mA$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		40		μV
Ripple Rejection	R_{rej}	$f = 120Hz$ $I_{OUT} = 100mA$ $8V \leq V_{IN} \leq 19V$ $I_{OUT} = 300mA$ $T_j = 25^\circ C$	62			dB
			62	80		dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT} = 350mA$		2.0		V
Short Current	I_{OS}	$T_j = 25^\circ C$, $V_{IN} = 35V$, to GND		300		mA
Peak Output Current	I_{op}	$T_j = 25^\circ C$		0.7		A

[L78N06]

Recommended Operating Conditions at $T_a = 25^\circ C$

			unit
Input Voltage	V_{IN}	8.5 to 21	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at $T_a = 25^\circ C$, $V_{IN} = 11V$, $I_{OUT} = 350mA$,
See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j = 25^\circ C$	5.75	6.0	6.25	V
Line Regulation	ΔV_{oline}	$T_j = 25^\circ C$, $8V \leq V_{IN} \leq 25V$, $I_{OUT} = 200mA$		5.0	60	mV
		$T_j = 25^\circ C$, $9V \leq V_{IN} \leq 20V$, $I_{OUT} = 200mA$		1.5	30	mV
Load Regulation	ΔV_{oload}	$T_j = 25^\circ C$, $5mA \leq I_{OUT} \leq 500mA$ $T_j = 25^\circ C$, $5mA \leq I_{OUT} \leq 200mA$			120	mV
					60	mV
Output Voltage	V_{OUT}	$8V \leq V_{IN} \leq 21V$, $5mA \leq I_{OUT} \leq 350mA$ $T_j = 25^\circ C$	5.7		6.3	V
Current Dissipation	I_{CC}	$T_j = 25^\circ C$		4.5	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$9V \leq V_{IN} \leq 25V$, $I_{OUT} = 200mA$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		45		μV
Ripple Rejection	R_{rej}	$f = 120Hz$ $I_{OUT} = 100mA$ $9V \leq V_{IN} \leq 20V$ $I_{OUT} = 300mA$ $T_j = 25^\circ C$	59			dB
			59	80		dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT} = 350mA$		2.0		V
Short Current	I_{OS}	$T_j = 25^\circ C$, $V_{IN} = 35V$, to GND		300		mA
Peak Output Current	I_{op}	$T_j = 25^\circ C$		0.7		A

[L78N07]

Recommended Operating Conditions at $T_a = 25^\circ C$

			unit
Input Voltage	V_{IN}	9.5 to 22	V
Output Current	I_{OUT}	5 to 500	mA

L78N00 Series

T-58-11-13

**Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{IN}=12\text{V}$, $I_{OUT}=350\text{mA}$,
See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}\text{C}$	6.72	7.0	7.28	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}\text{C}$, $9\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$		6.0	60	mV
		$T_j=25^{\circ}\text{C}$, $10\text{V} \leq V_{IN} \leq 20\text{V}$, $I_{OUT}=200\text{mA}$		2.0	30	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$			140	mV
		$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$			70	mV
Output Voltage	V_{OUT}	$9\text{V} \leq V_{IN} \leq 22\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$	6.6		7.4	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}\text{C}$		4.6	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$10\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		48		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$ $I_{OUT}=100\text{mA}$ $10\text{V} \leq V_{IN} \leq 21\text{V}$ $I_{OUT}=300\text{mA}$ $T_j=25^{\circ}\text{C}$	58	80		dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350\text{mA}$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}\text{C}$, $V_{IN}=35\text{V}$, to GND		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}\text{C}$		0.7		A

[L78N08]**Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$**

			unit
Input Voltage	V_{IN}	10.5 to 23	V
Output Current	I_{OUT}	5 to 500	mA

**Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{IN}=15\text{V}$, $I_{OUT}=350\text{mA}$,
See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}\text{C}$	7.7	8.0	8.3	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}\text{C}$, $10.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$		6.0	60	mV
		$T_j=25^{\circ}\text{C}$, $11\text{V} \leq V_{IN} \leq 20\text{V}$, $I_{OUT}=200\text{mA}$		2.0	30	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$			160	mV
		$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$			80	mV
Output Voltage	V_{OUT}	$10.5\text{V} \leq V_{IN} \leq 23\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$	7.6		8.4	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}\text{C}$		4.6	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$11\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		50		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$ $I_{OUT}=100\text{mA}$ $11.5\text{V} \leq V_{IN} \leq 22\text{V}$ $I_{OUT}=300\text{mA}$ $T_j=25^{\circ}\text{C}$	56	80		dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350\text{mA}$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}\text{C}$, $V_{IN}=35\text{V}$, to GND		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}\text{C}$		0.7		A

L78N00 Series

T-58 -11-13

[L78N09]**Recommended Operating Conditions at $T_a=25^\circ\text{C}$**

Input Voltage	V_{IN}	12 to 25	unit
Output Current	I_{OUT}	5 to 500	mA

**Operating Characteristics at $T_a=25^\circ\text{C}$, $V_{IN}=16\text{V}$, $I_{OUT}=350\text{mA}$,
See specified Test Circuit.**

		min	typ	max	unit
Output Voltage	V_{OUT}	8.6	9.0	9.4	V
Line Regulation	ΔV_{line}		6.0	100	mV
					$T_j=25^\circ\text{C}$
					$T_j=25^\circ\text{C}$, $11.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$
			2.0	50	mV
					$T_j=25^\circ\text{C}$, $12\text{V} \leq V_{IN} \leq 20\text{V}$, $I_{OUT}=200\text{mA}$
Load Regulation	ΔV_{load}			180	mV
				90	mV
					$T_j=25^\circ\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$
					$T_j=25^\circ\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$
Output Voltage	V_{OUT}	8.5		9.5	V
					$11.5\text{V} \leq V_{IN} \leq 24\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$
Current Dissipation	I_{CC}		4.6	6.0	mA
Current Dissipation	ΔI_{CCline}			0.8	mA
Variation (Line)					$12.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT} \leq 200\text{mA}$
Current Dissipation	ΔI_{CCload}			0.5	mA
Variation (Load)					$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$
Output Noise Voltage	V_{NO}		60		$10\text{Hz} \leq f \leq 100\text{kHz}$
Ripple Rejection	R_{rej}		56		$f=120\text{Hz}$
			56	80	$12\text{V} \leq V_{IN} \leq 23\text{V}$, $T_j=25^\circ\text{C}$
					$I_{OUT}=100\text{mA}$
					$I_{OUT}=300\text{mA}$
Minimum Input-Output	V_{drop}		2.0		V
Voltage Drop					$I_{OUT}=350\text{mA}$
Short Current	I_{OS}		300		mA
Peak Output Current	I_{op}		0.7		A
					$T_j=25^\circ\text{C}$, $V_{IN}=35\text{V}$, to GND
					$T_j=25^\circ\text{C}$

[L78N10]**Recommended Operating Conditions at $T_a=25^\circ\text{C}$**

Input Voltage	V_{IN}	13 to 25	unit
Output Current	I_{OUT}	5 to 500	mA

**Operating Characteristics at $T_a=25^\circ\text{C}$, $V_{IN}=17\text{V}$, $I_{OUT}=350\text{mA}$,
See specified Test Circuit.**

		min	typ	max	unit
Output Voltage	V_{OUT}	9.6	10.0	10.4	V
Line Regulation	ΔV_{oline}		7.0	100	mV
					$T_j=25^\circ\text{C}$
					$T_j=25^\circ\text{C}$, $12.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$
			2.0	50	mV
					$T_j=25^\circ\text{C}$, $13\text{V} \leq V_{IN} \leq 22\text{V}$, $I_{OUT}=200\text{mA}$
Load Regulation	ΔV_{load}			200	mV
				100	mV
					$T_j=25^\circ\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$
					$T_j=25^\circ\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$
Output Voltage	V_{OUT}	9.5		10.5	V
					$12.5\text{V} \leq V_{IN} \leq 25\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$
Current Dissipation	I_{CC}		4.6	6.0	mA
Current Dissipation	ΔI_{CCline}			0.8	mA
Variation (Line)					$13.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$
Current Dissipation	ΔI_{CCload}			0.5	mA
Variation (Load)					$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$
Output Noise Voltage	V_{NO}		65		$10\text{Hz} \leq f \leq 100\text{kHz}$
Ripple Rejection	R_{rej}		55		$f=120\text{Hz}$
			55	80	$13\text{V} \leq V_{IN} \leq 25\text{V}$, $T_j=25^\circ\text{C}$
					$I_{OUT}=100\text{mA}$
					$I_{OUT}=300\text{mA}$

Continued on next page.

L78N00 Series

T-58-11-13

Continued from preceding page.

Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$	min	typ	max	unit
Short Current	I_{OS}	$T_J=25^{\circ}C, V_{IN}=35V, \text{ to GND}$		2.0		V
Peak Output Current	I_{op}	$T_J=25^{\circ}C$		300		mA
				0.7		A

[L78N12]

Recommended Operating Conditions at $T_a=25^{\circ}C$

Input Voltage	V_{IN}	unit
Output Current	I_{OUT}	15 to 25 V 5 to 500 mA

Operating Characteristics at $T_a=25^{\circ}C, V_{IN}=19V, I_{OUT}=350mA$,
See specified Test Circuit.

Output Voltage	V_{OUT}	$T_J=25^{\circ}C$	min	typ	max	unit
Line Regulation	ΔV_{oline}	$T_J=25^{\circ}C, 14.5V \leq V_{IN} \leq 30V,$ $I_{OUT}=200mA$	11.5	12.0	12.5	V
		$T_J=25^{\circ}C, 16V \leq V_{IN} \leq 25V,$ $I_{OUT}=200mA$		8.0	100	mV
Load Regulation	ΔV_{oload}	$T_J=25^{\circ}C, 5mA \leq I_{OUT} \leq 500mA$			2.0	50 mV
Output Voltage	V_{OUT}	$T_J=25^{\circ}C, 5mA \leq I_{OUT} \leq 200mA$ $14.5V \leq V_{IN} \leq 27V,$ $5mA \leq I_{OUT} \leq 350mA$	11.4		12.6	V
Current Dissipation	I_{CC}	$T_J=25^{\circ}C$		4.8	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$15V \leq V_{IN} \leq 30V,$ $I_{OUT}=200mA$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		75		uV
Ripple Rejection	R_{rej}	$f=120Hz$ $15V \leq V_{IN} \leq 25V$ $T_J=25^{\circ}C$	55	80		dB
		$I_{OUT}=100mA$ $I_{OUT}=300mA$				dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$		2.0		V
Short Current	I_{OS}	$T_J=25^{\circ}C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_J=25^{\circ}C$		0.7		A

[L78N15]

Recommended Operating Conditions at $T_a=25^{\circ}C$

Input Voltage	V_{IN}	unit
Output Current	I_{OUT}	18 to 30 V 5 to 500 mA

Operating Characteristics at $T_a=25^{\circ}C, V_{IN}=23V, I_{OUT}=350mA$,
See specified Test Circuit.

Output Voltage	V_{OUT}	$T_J=25^{\circ}C$	min	typ	max	unit
Line Regulation	ΔV_{oline}	$T_J=25^{\circ}C, 17.5V \leq V_{IN} \leq 30V,$ $I_{OUT}=200mA$	14.4	15.0	15.6	V
		$T_J=25^{\circ}C, 19V \leq V_{IN} \leq 30V,$ $I_{OUT}=200mA$		10.0	100	mV
Load Regulation	ΔV_{oload}	$T_J=25^{\circ}C, 5mA \leq I_{OUT} \leq 500mA$			3.0	50 mV
Output Voltage	V_{OUT}	$T_J=25^{\circ}C, 5mA \leq I_{OUT} \leq 200mA$ $17.5V \leq V_{IN} \leq 30V,$ $5mA \leq I_{OUT} \leq 350mA$	14.25		15.75	V
Current Dissipation	I_{CC}	$T_J=25^{\circ}C$		4.8	6.0	mA

Continued on next page.

L78N00 Series

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Current Dissipation	ΔI_{CCline}	$17.5V \leq V_{IN} \leq 30V,$			0.8	mA
Variation (Line)		$I_{OUT} = 200mA$				
Current Dissipation	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Variation (Load)						
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		90		μV
Ripple Rejection	R_{rej}	$f = 120Hz$				dB
		$18.5V \leq V_{IN} \leq 28.5V$	$I_{OUT} = 100mA$	54		dB
		$T_j = 25^\circ C$	$I_{OUT} = 300mA$	54	70	
Minimum Input-Output	V_{drop}	$I_{OUT} = 350mA$		2.0		V
Voltage Drop						
Short Current	I_{OS}	$T_j = 25^\circ C, V_{IN} = 35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_j = 25^\circ C$		0.7		A

[L78N18]

Recommended Operating Conditions at $T_a = 25^\circ C$

			unit
Input Voltage	V_{IN}	21 to 33	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at $T_a = 25^\circ C, V_{IN} = 27V, I_{OUT} = 350mA$,

See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j = 25^\circ C$	17.3	18.0	18.7	V
Line Regulation	ΔV_{oline}	$T_j = 25^\circ C, 21V \leq V_{IN} \leq 35V,$		10.0	100	mV
		$I_{OUT} = 200mA$				
		$T_j = 25^\circ C, 22V \leq V_{IN} \leq 35V,$		5.0	50	mV
		$I_{OUT} = 200mA$				
Load Regulation	ΔV_{oload}	$T_j = 25^\circ C, 5mA \leq I_{OUT} \leq 500mA$			360	mV
		$T_j = 25^\circ C, 5mA \leq I_{OUT} \leq 200mA$			180	mV
Output Voltage	V_{OUT}	$21V \leq V_{IN} \leq 33V,$	17.1		18.9	V
		$5mA \leq I_{OUT} \leq 350mA$				
Current Dissipation	I_{CC}	$T_j = 25^\circ C$		4.9	6.0	mA
Current Dissipation	ΔI_{CCline}	$21V \leq V_{IN} \leq 33V,$			0.8	mA
Variation (Line)		$I_{OUT} = 200mA$				
Current Dissipation	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Variation (Load)						
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		100		μV
Ripple Rejection	R_{rej}	$f = 120Hz$				dB
		$22V \leq V_{IN} \leq 33V,$	$I_{OUT} = 100mA$	53		dB
		$T_j = 25^\circ C$	$I_{OUT} = 300mA$	53	70	
Minimum Input-Output	V_{drop}	$I_{OUT} = 350mA$		2.0		V
Voltage Drop						
Short Current	I_{OS}	$T_j = 25^\circ C, V_{IN} = 35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_j = 25^\circ C$		0.7		A

[L78N20]

Recommended Operating Conditions at $T_a = 25^\circ C$

			unit
Input Voltage	V_{IN}	23 to 35	V
Output Current	I_{OUT}	5 to 500	mA

L78N00 Series

T-58-11-13

Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=29\text{V}$, $I_{\text{OUT}}=350\text{mA}$, See specified Test Circuit.						min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}\text{C}$				19.2	20.0	20.8	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}\text{C}$, $23\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $I_{\text{OUT}}=200\text{mA}$				10.0	100		mV
		$T_j=25^{\circ}\text{C}$, $24\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $I_{\text{OUT}}=200\text{mA}$				5.0	50		mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{\text{OUT}} \leq 500\text{mA}$						400	mV
		$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{\text{OUT}} \leq 200\text{mA}$						200	mV
Output Voltage	V_{OUT}	$23\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$				19.0		21.0	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}\text{C}$				4.9	6.0		mA
Current Dissipation	ΔI_{CCline}	$23\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $I_{\text{OUT}}=200\text{mA}$						0.8	mA
Variation (Line)									
Current Dissipation	ΔI_{CCload}	$5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$						0.5	mA
Variation (Load)									
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$					110		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$, $I_{\text{OUT}}=100\text{mA}$				53			dB
		$24\text{V} \leq V_{\text{IN}} \leq 34\text{V}$, $I_{\text{OUT}}=300\text{mA}$				53	70		dB
		$T_j=25^{\circ}\text{C}$							
Minimum Input-Output Voltage Drop	V_{drop}	$I_{\text{OUT}}=350\text{mA}$					2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}\text{C}$, $V_{\text{IN}}=35\text{V}$, to GND					300		mA
Peak Output Current	I_{OP}	$T_j=25^{\circ}\text{C}$					0.7		A

[L78N24]

Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$		unit
Input Voltage	V_{IN}	27 to 35 V
Output Current	I_{OUT}	5 to 500 mA

Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=33\text{V}$, $I_{\text{OUT}}=350\text{mA}$, See specified Test Circuit.						min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}\text{C}$				23.0	24.0	25.0	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}\text{C}$, $27\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $I_{\text{OUT}}=200\text{mA}$				10.0	100		mV
		$T_j=25^{\circ}\text{C}$, $28\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $I_{\text{OUT}}=200\text{mA}$					5.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{\text{OUT}} \leq 500\text{mA}$						480	mV
		$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{\text{OUT}} \leq 200\text{mA}$						240	mV
Output Voltage	V_{OUT}	$27\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$				22.8		25.2	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}\text{C}$					5.0	6.0	mA
Current Dissipation	ΔI_{CCline}	$27\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $I_{\text{OUT}}=200\text{mA}$						0.8	mA
Variation (Line)									
Current Dissipation	ΔI_{CCload}	$5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$						0.5	mA
Variation (Load)									
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$					170		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$, $I_{\text{OUT}}=100\text{mA}$				50			dB
		$28\text{V} \leq V_{\text{IN}} \leq 35\text{V}$, $I_{\text{OUT}}=300\text{mA}$				50	70		dB
		$T_j=25^{\circ}\text{C}$							
Minimum Input-Output Voltage Drop	V_{drop}	$I_{\text{OUT}}=350\text{mA}$					2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}\text{C}$, $V_{\text{IN}}=35\text{V}$, to GND					300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}\text{C}$					0.7		A

L78N00 Series

T-58-11-13

Specified Test Circuit (Common to L78N00 series)

