


XCite™ Embedded RF Modules

900 MHz Embedded RF Modules for OEMs

900 MHz embedded RF modules provide OEMs with a low-cost wireless solution.

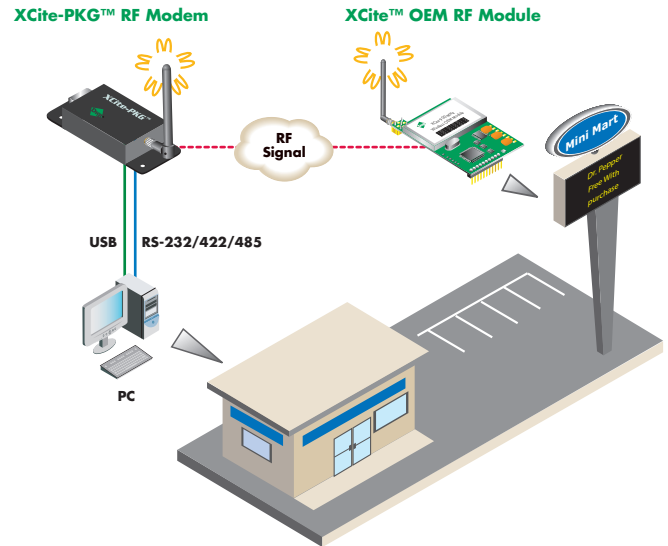

Features/Benefits

- Indoor/urban range up to 300 feet
- Outdoor line-of-sight range up to 1000 feet
- 7 frequency hopping channels each with up to 65K addresses
- Outstanding receiver sensitivity (-110 dB @9600 bps)
- Pin-for-pin and form-factor compatible with XStream RF modules
- Over-the-air compatible with XStream RF modules (@ 9.6 kbps)
- Low-power features for power-sensitive applications:
 - Pin, serial port and cyclic sleep modes available
- Wired whip and RPSMA connector antenna options
- Commercial (0° to 70° C) and Industrial temperature ratings (-40° to 85° C)

Overview




Digi's XCite embedded RF modules enable easy and reliable serial wireless connectivity between devices with minimal development out-of-the-box. A low-cost alternative to XStream™ embedded RF modules, XCite modules are pin-for-pin and over-the-air compatible with XStream modules (in 9.6 kbps configurations).

Innovations stamped in their design enable XCite RF modules to yield two- to eight-times the range of competing RF devices. This allows OEMs and integrators to cover more ground with fewer devices, with increased reliability. Additionally, XCite RF modules are easy to use, thereby reducing the complexity of data system development and time to market.

Available in a variety of configurations, including Commercial or Industrial Temperature ratings, and two antenna variants, XCite RF modules can wirelessly connect a variety of devices across many applications including remote monitoring, building automation/security, industrial automation/SCADA, fleet management/asset tracking and sensor data capture in embedded systems.

9XCite 900 MHz OEM RF Modules

Specifications		9XCite (900 MHz)	
Performance	Indoor/Urban Range (w/ 2.1 dB dipole antenna)	Up to 300 ft (90 m)	
	Outdoor RF Line-of-Sight Range (w/ 2.1 dB dipole antenna)	Up to 1000 ft (300 m)	
	Transmit Power Output	4 mW (6 dBm)	
	Interface Data Rate (software selectable)	1200 - 57600 bps	
	Throughput Data Rate	9,600 bps	38,400 bps
	RF Data Rate	10,000 bps	41,666 bps
	Receiver Sensitivity	-108 dBm	-104 dBm
Power Requirements	Supply Voltage	2.85 - 5.50VDC	
	Transmit Current	55 mA	
	Receive Current	45 mA	
	Power Down Current	< 20 μ A	
General	Dimensions	1.600 in x 2.825 in x 0.60 in (4.06 cm x 7.18 cm x 1.52 cm)	
	Weight	0.8 oz (24.0 g)	
	Operating Temperature	0° C to 70° C (Commercial) -40° C to 85° C (Industrial)	
	Antenna Options	RPSMA or Wire Antenna	
	Operating Frequency	ISM 902 - 928 MHz	
Networking and Security	Supported Network Topologies	Peer-to-Peer (no master/slave dependencies), Point-to-Point, Point-to-Multipoint, Multidrop	
	Number of Channels (software selectable)	7 frequency hopping channels (Hopping Mode) & 25 single frequency channels (Single Channel Mode)	
	Network Filtration Layers	VID, Channel, Destination Address	
Certifications	FCC Part 15.247	OUR-9XCITE	
	Industry Canada (IC)	4214A-9XCITE	

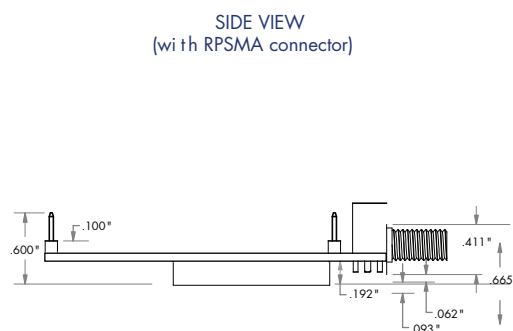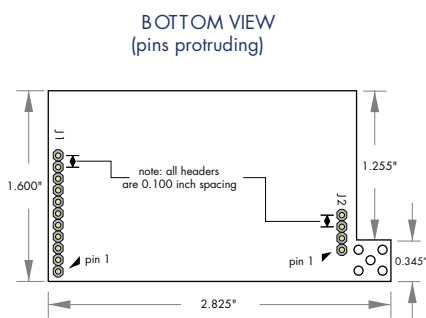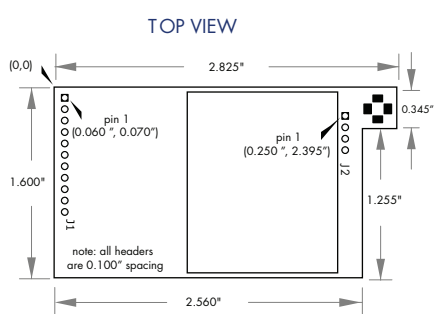

Please visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a one-year warranty. www.digi.com/support

Digi International

11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
email: info@digi.com

Digi International France

31 rue des Poissonniers
92200 Neuilly sur Seine
PH: +33-1-55-61-98-98
FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK

NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH: +81-3-5428-0261
FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited

Suite 1703-05, 17/F.,
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

WHEN
RELIABILITY
MATTERS™

© 2005-2008 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the When Reliability Matters logo, XCite and XStream are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective holders.

91001414
A1/208

