

## FYL-3014VRC1A


### Features:

- High intensity
- General purpose leads
- RoHs Complant.


### Descriptions:

- Dice material: InGaN.
- Emitting Color: Pink
- Device Outline:  $\Phi$ 3mm Round Type.
- Lens Type: Water clear

### Radiation pattern.

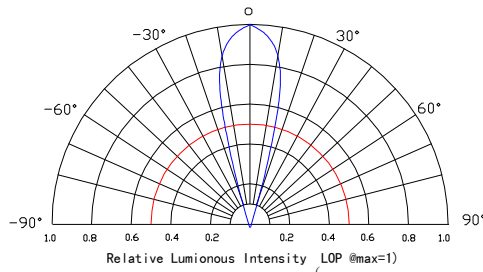

### Package configuration

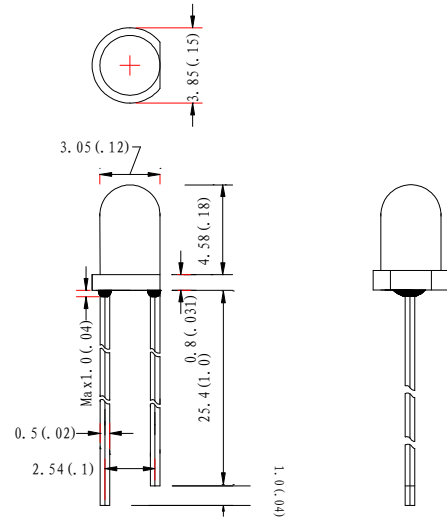

- ◆ All dimensions are millimeters (inches)
- ◆ Tolerance is  $\pm 0.25\text{mm}(0.010\text{'})$  unless otherwise noted.

### Absolute maximum ratings(Ta=25 °c)


Parameter	MAX.	Unit
Power Dissipation	70	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	20	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Electrostatic Discharge (ESD)	150	V
Operating Temperature Range	<b>-30°C to +80°C</b>	
Storage Temperature Range	<b>-40°C to +100°C</b>	
Lead Soldering Temperature[4mm(.157") From Body]	<b>260°C for 5 Seconds</b>	

### Electrical and optical characteristics(Ta=25 °c)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	$I_V$		500		mcd	$I_F=20\text{mA}$
Viewing Angle	$2\theta_{1/2}$	20	25	30	Deg	
Chromaticity coordinates	x		0.40			
	y		0.20			
Forward Voltage	$V_F$	2.8	3.2	3.6	V	$V_R=5\text{V}$
Reverse Current	$I_R$			50	$\mu\text{A}$	

## Typical Electrical Characteristics Curves (25 °c Ambient Temperature Unless Otherwise Noted)


Spectral Reduance

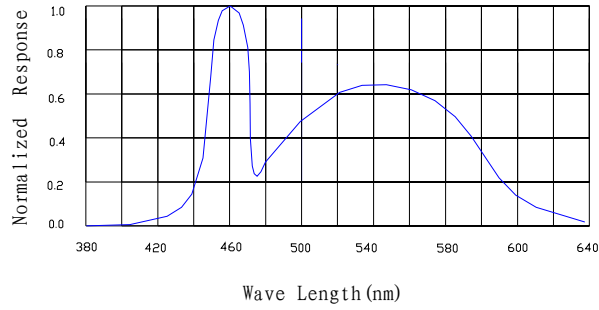


Forward Current Vs Forward Voltage

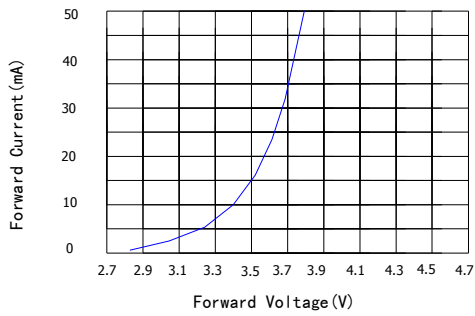


Relative Luminous intensity vs Forward current

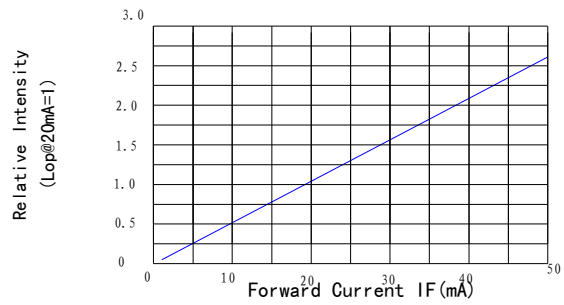


Forward Current Derating Curve

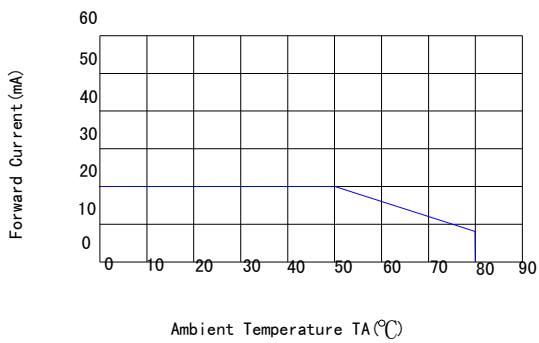


Luminous Intensity Vs. Ambient Temperature

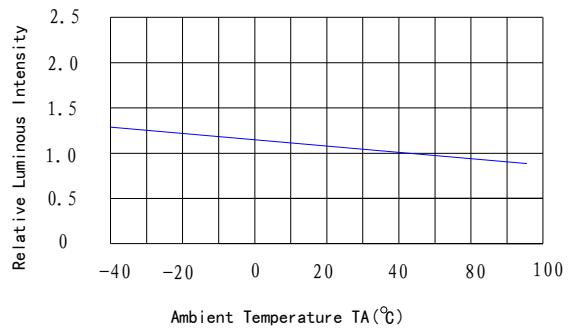


## LAMP PACKING.

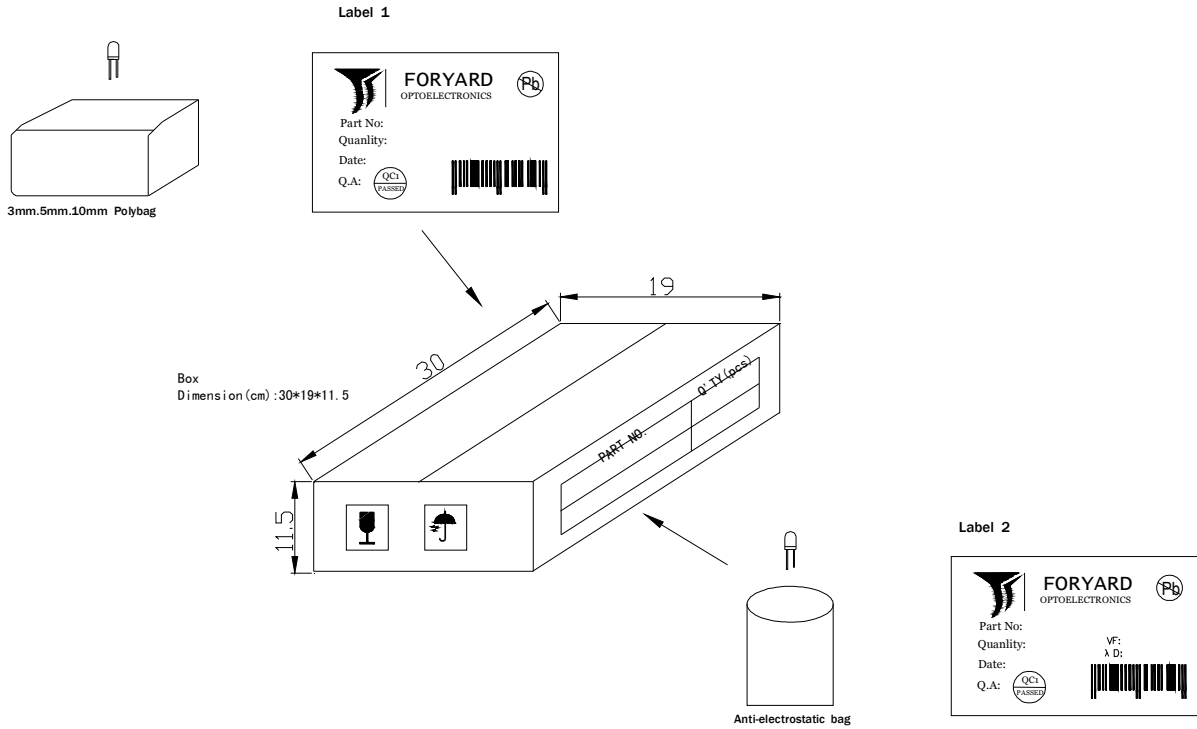

DEVICE	QTY/polybag(pcs)	Polybag/box A	Fig
5mm(T-1 3/4)	1000	8 bags	Label 1
3mm(T-1 )	1000	10 bags	Label 1
10mm(T-1)	250	8 bags	Label 1
Blue/Green/White	500pcs	8 bags	Label 2



**CARTON**  
Dimension(cm):39\*32\*38

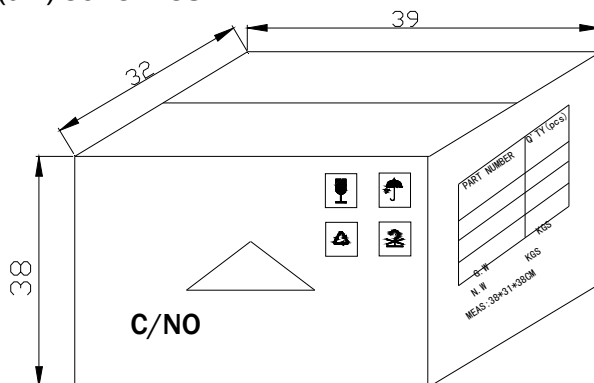

6 Boxes/Carton  
 5mm:48,000pcs  
 3mm:60,000pcs  
 10mm:12,000pcs  
 Blue/Pure Green/bluish Green  
 /White:24,000pcs