

S G S-THOMSON

30E D


DUAL HIGH PERFORMANCE OPERATIONAL AMPLIFIER

- SINGLE OR SPLIT SUPPLY OPERATION
- LOW POWER CONSUMPTION
- HIGH UNITY GAIN BANDWIDTH
- NO CROSSOVER DISTORTION
- NO POP NOISE
- SHORT-CIRCUIT PROTECTION
- HIGH CHANNEL SEPARATION


in low noise audio signal processing application. The optimized class AB output stage completely eliminates crossover distortion, under any load conditions, has large source and sink capacity and is short-circuit protected.

DESCRIPTION

The LS4558N is a high performance dual operational amplifier with frequency and phase compensation built into the chip. The internal phase compensation allows stable operation as voltage follower in spite of its high gain-bandwidth products. The circuit presents very stable electrical characteristics over the entire supply voltage range and the specially designed input stage allow the LS4558N to be used




Minidip




SO-8J

ORDER CODES : LS4558NB (Minidip)
LS4558NM (SO-8J)

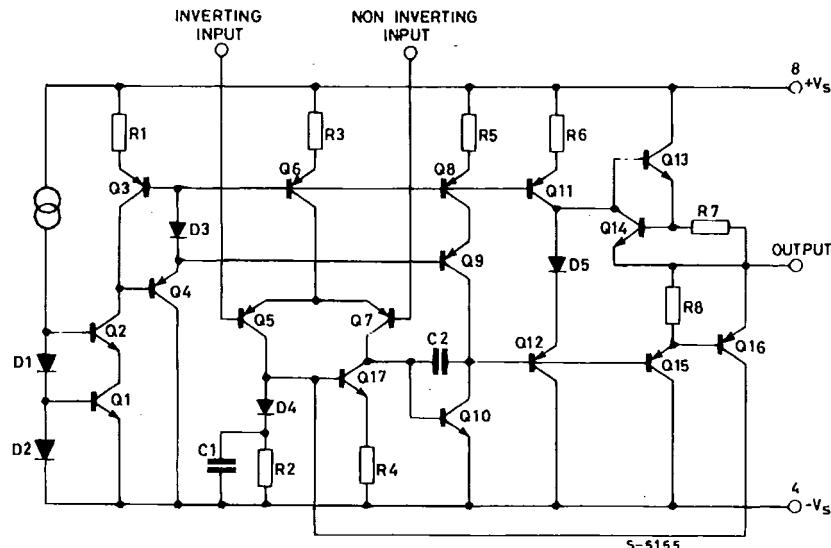SCHEMATIC DIAGRAM (one section)

CONNECTION DIAGRAM (top view)

www.DataSheet4U.com

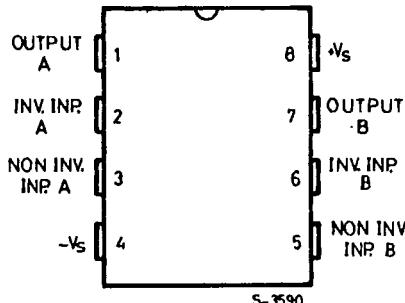

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_s	Supply Voltage	± 18	V
V_i	Input Voltage	$\pm V_s$	
V_i	Differential Input Voltage	$\pm (V_s - 1)$	V
P_{tot}	Power Dissipation at $T_{amb} = 70^\circ\text{C}$	Minidip Micropackage	665 400 mW mW
T_{op}	Operating Temperature	0 to 70	$^\circ\text{C}$
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55 to 150	$^\circ\text{C}$

THERMAL DATA

S G S-THOMSON



30E D

	Minidip	SO-8
$R_{th J-amb}$ Thermal Resistance Junction-ambient	120 $^\circ\text{C}/\text{W}$	200 $^\circ\text{C}/\text{W}$

TYPICAL APPLICATIONS

Balanced Input Audio Preamplifier.

DC Coupled Low-pass Active Filter
($f = 1 \text{ KHz}$, $G_v = 6 \text{ dB}$).

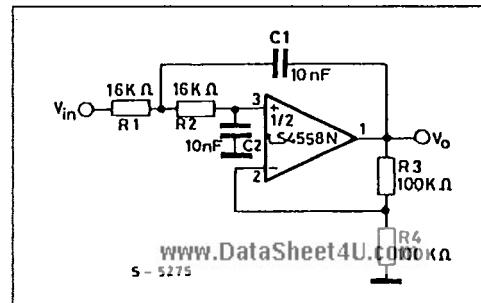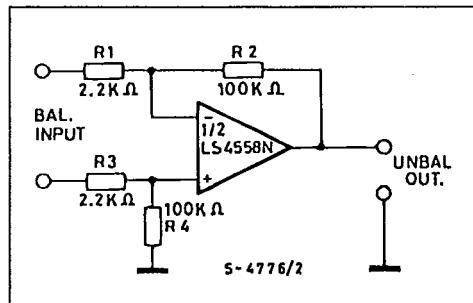

ELECTRICAL CHARACTERISTICS ($V_s = \pm 15 V$, $T_{amb} = 25^\circ C$, unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_s	Supply Current (*)			1	2	mA
I_b	Input Bias Current			50	500	nA
		$T_{min} < T_{op} < T_{max}$			800	nA
R_I	Input Resistance	$f = 1 \text{ KHz}$	0.3	1		MΩ
V_{os}	Input Offset Voltage	$R_g \leq 10 \text{ K}\Omega$		0.5	5	mV
		$R_g \leq 10 \text{ K}\Omega$ $T_{min} < T_{op} < T_{max}$			7.5	mV
I_{os}	Input Offset Current			20	200	nA
		$T_{min} < T_{op} < T_{max}$			500	nA
I_{sc}	Output Short Circuit Current			23		mA
G_v	Large Signal Open Loop Voltage Gain	$R_L = 2 \text{ K}\Omega$	86	100		dB
B	Gain-bandwidth Product	$f = 20 \text{ KHz}$	2	3		MHz
e_N	Total Input Noise Voltage	$f = 1 \text{ KHz}$	$R_g = 50 \Omega$	8	15	nV
			$R_g = 1 \text{ K}\Omega$	10		$\sqrt{\text{Hz}}$
			$R_g = 10 \text{ K}\Omega$	18		
e_N	Popcorn Noise	$B = 1 \text{ Hz to } 1 \text{ KHz}$			10	μV
		$R_g = 10 \text{ K}\Omega$				Peak
d	Distortion	$G_v = 20 \text{ dB}$	$R_L = 2 \text{ K}\Omega$		0.03	%
		$V_o = 2 \text{ Vpp}$	$f = 1 \text{ KHz}$			
V_o	Output Voltage Swing	$R_L = 2 \text{ K}\Omega$		± 13		V
V_o	Large Signal Voltage Swing	$R_L = 10 \text{ K}\Omega$		28		Vpp
	Transient Response	$V_i = 20 \text{ mV}$	$R_L = 2 \text{ K}\Omega$		0.13	μs
		$C_L = 100 \text{ pF}$			5	%
SR	Slew Rate	Unity Gain $R_L = 2 \text{ K}\Omega$	0.8	1.5		V/ μs
CMR	Common Mode Rejection	$V_i = 10 \text{ V}$ $T_{min} < T_{op} < T_{max}$	70	90		dB
SVR	Supply Voltage Rejection	$V_i = 1 \text{ V}$ $T_{min} < T_{op} < T_{max}$	$f = 100 \text{ Hz}$	80	100	dB
CS	Channel Separation	$f = 10 \text{ KHz}$	$R_g = 1 \text{ K}\Omega$		105	

(*) Both amplifiers.

Figure 1 : Open Loop Frequency and Phase Response.

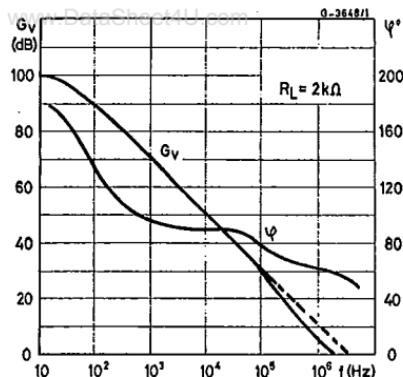


Figure 3 : Supply Voltage Rejection vs. Frequency

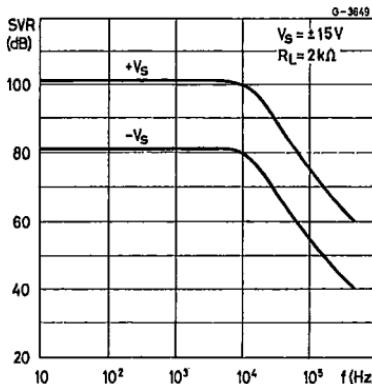


Figure 5 : Output Voltage Swing vs. Load Resistance.

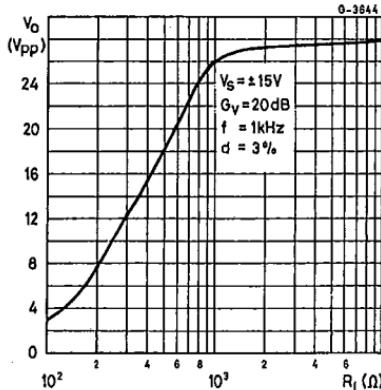


Figure 2 : Open Loop Gain vs. Ambient Temperature.

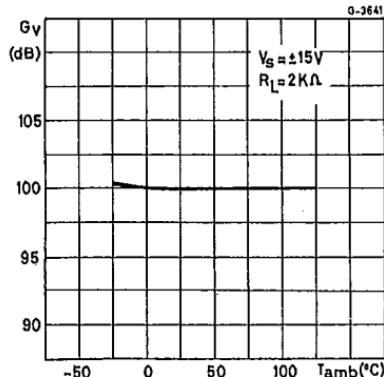


Figure 4 : Large Signal Frequency Response

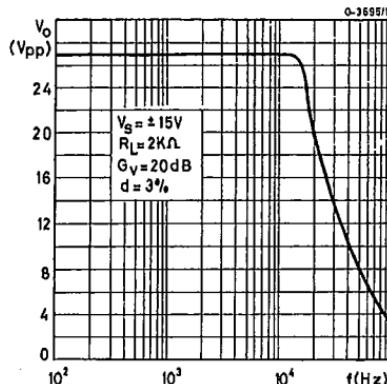


Figure 6 : Total Input Noise vs. Frequency.

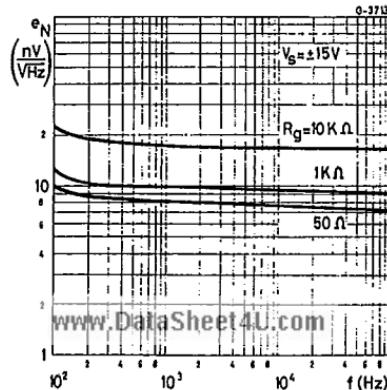


Figure 7 : Channel Separation.

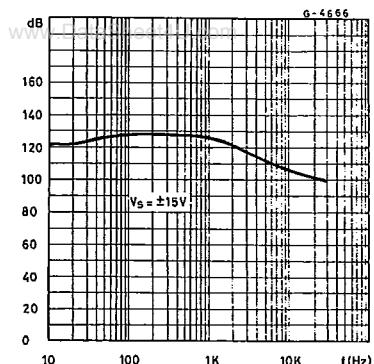


Figure 8 : Transient Response.



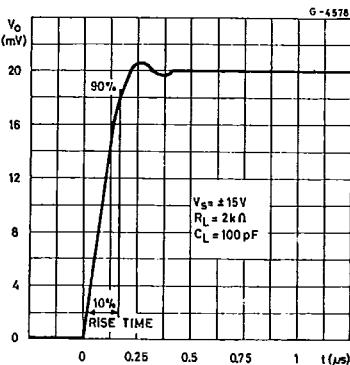


Figure 9 : Voltage Follower Large-signal Pulse Response.

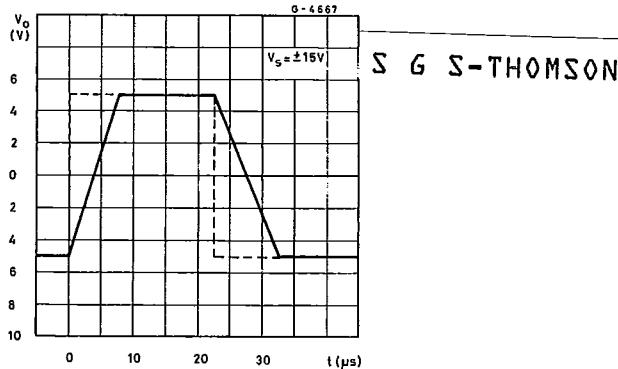

APPLICATION INFORMATION

Figure 10 : Mike/Line Preamplifier for Audio Mixers (0 dB to 60 dB continuously variable gain).

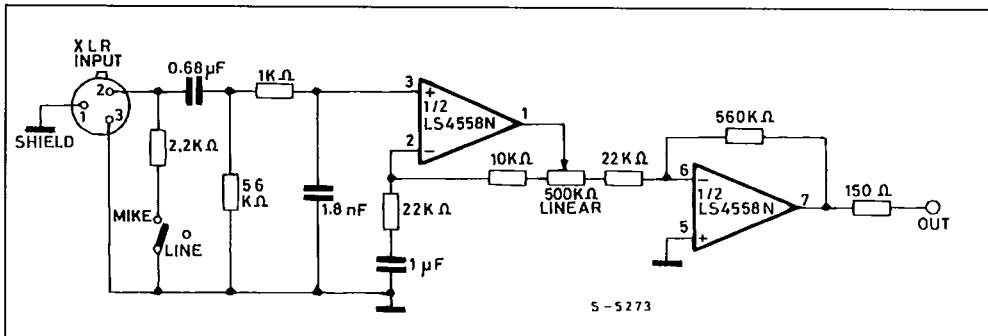

Note : The particular characteristics of the circuit of Figure 10 is that using a linear potentiometer, the gain is continuously variable in a logarithmic mode from 0 dB to 60 dB in the audio band.


Figure 11 : Microphones Nomograph.

S G S-THOMSON

30E

www.DataSheet4U.com

T-79-31

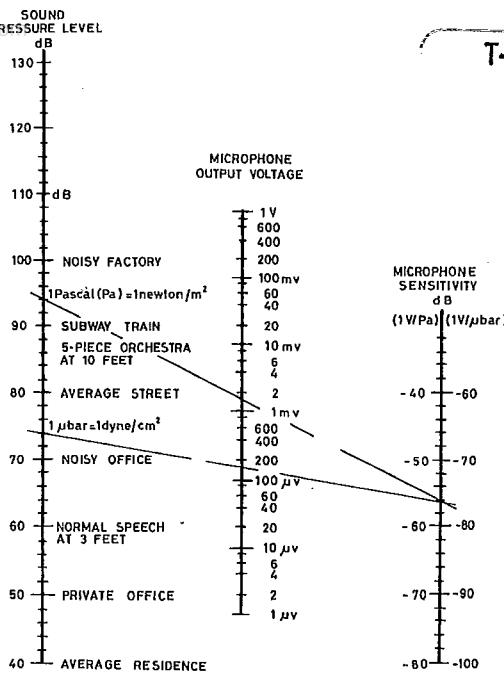

5-4400

**Figure 12 : Very Low-noise Mike Preamplifier
(Gv = 40 dB).**


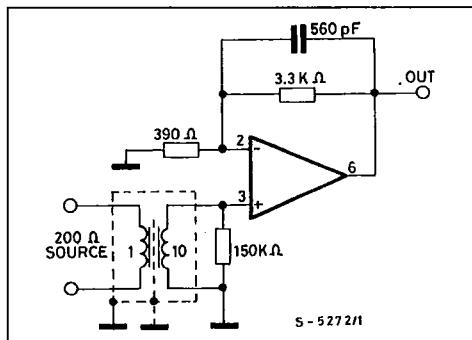


Figure 13 : Balanced Input Audio Preamplifier.

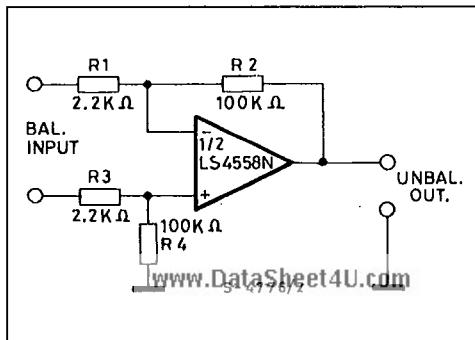

www.DataSheet4U.com

Figure 14 : 20 Hz to 200 Hz Variable High-pass Filter ($G_v = 3$ dB).

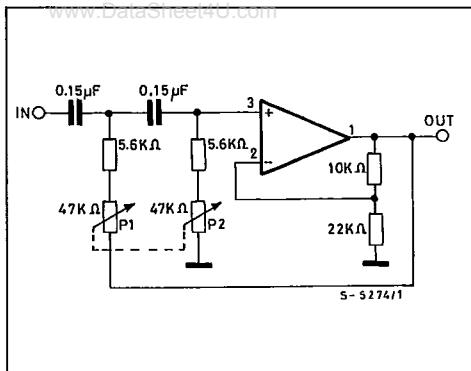


Figure 15 : Frequency Response of the High-pass Filter of Figure 14.

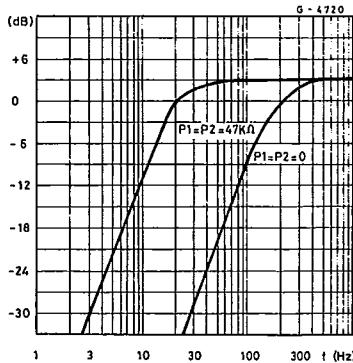


Figure 16 : DC Coupled Low-pass Active Filter ($f = 1$ KHz, $G_v = 6$ dB).

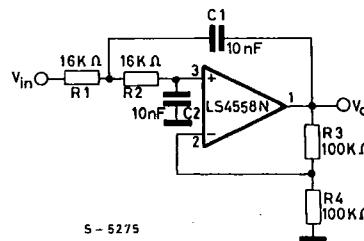


Figure 17 : Switchable HP-LP Audio Filter.

S G S-THOMSON

30E



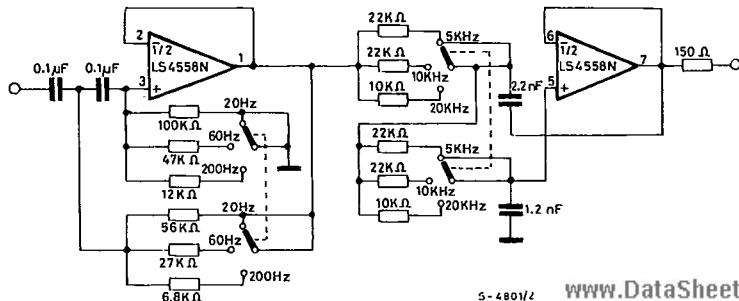


Figure 18 : Subsonic or Rumble Filter (GV = 0 dB).


fc (Hz)	C (μF)
15	0.68
22	0.47
30	0.33
55	0.22
100	0.1

Figure 19 : High-cut Filter (GV = 0 dB).

S G S-THOMSON 30E D

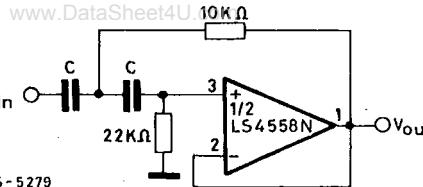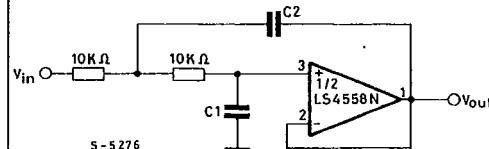

fc (KHz)	C1 (nF)	C2 (nF)
3	3.9	6.8
5	2.2	4.7
10	1.2	2.2
15	0.68	1.5

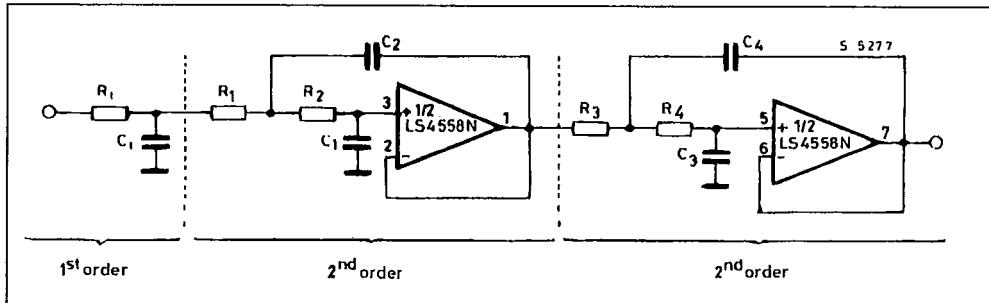Figure 20 : Fifth Order 3.4 KHz Low-pass Butterworth Filter.For $f_c = 3.4 \text{ KHz}$ and $R_1 = R_2 = R_3 = R_4 = 10 \text{ k}\Omega$, we obtain :

$$C_1 = 1.354 \cdot \frac{1}{R} \cdot \frac{1}{2\pi f_c} = 6.33 \text{ nF}$$

$$C_1 = 0.309 \cdot \frac{1}{R} \cdot \frac{1}{2\pi f_c} = 1.45 \text{ nF}$$

$$C_1 = 0.421 \cdot \frac{1}{R} \cdot \frac{1}{2\pi f_c} = 1.97 \text{ nF}$$


$$C_1 = 3.325 \cdot \frac{1}{R} \cdot \frac{1}{2\pi f_c} = 15.14 \text{ nF}$$

$$C_1 = 1.753 \cdot \frac{1}{R} \cdot \frac{1}{2\pi f_c} = 8.20 \text{ nF}$$

The attenuation of the filter is 30 dB at 3.4 KHz and better than 60 dB at 15 KHz.

Figure 21 : Six-pole 355 Hz Low-pass Filter (Chebychev type).

T-79-31

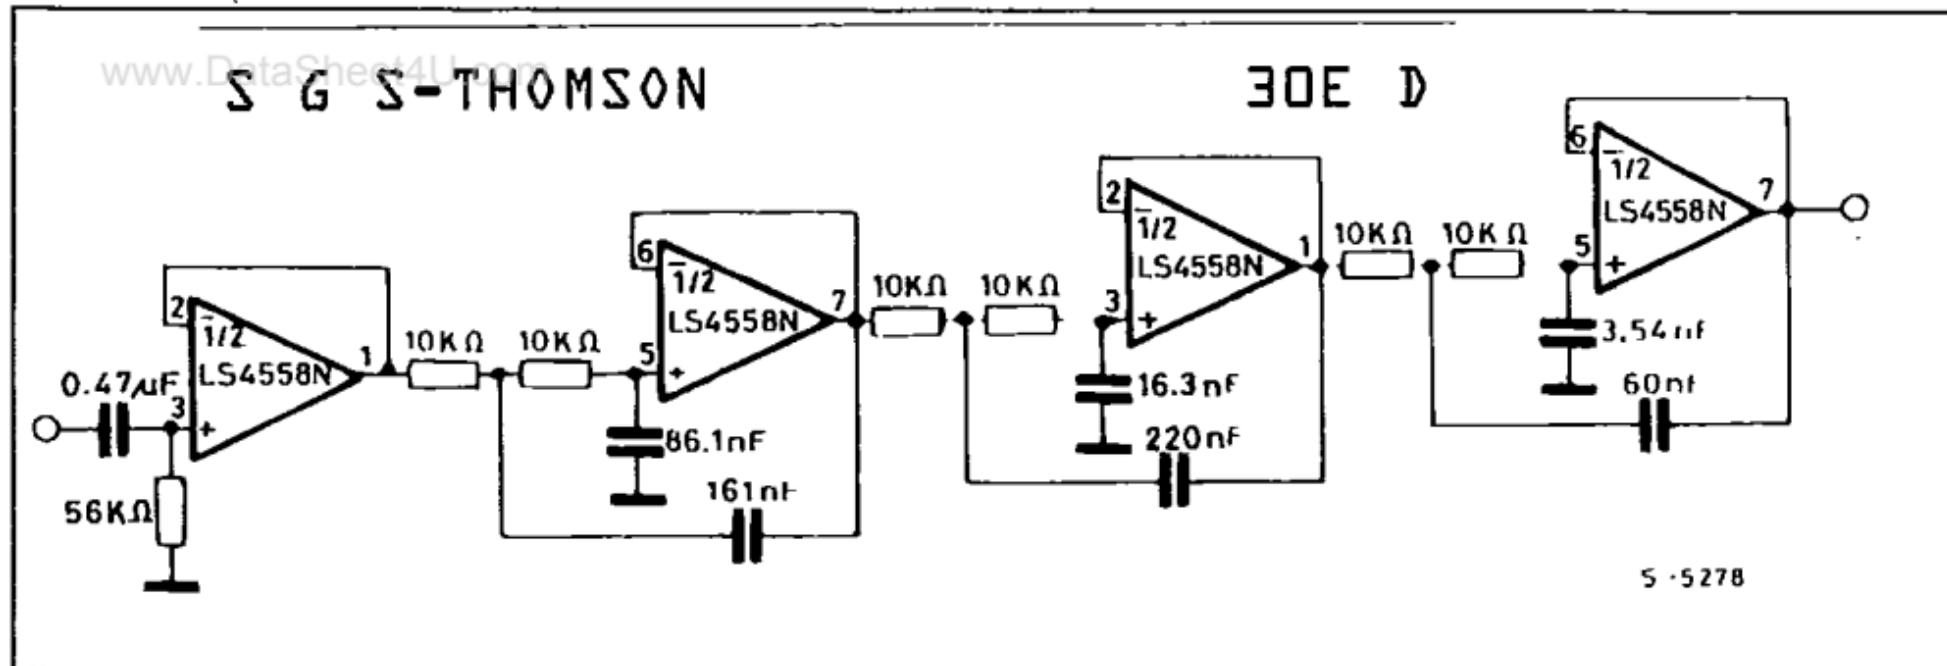

This is a 6-pole Chebychev type with ± 0.25 dB ripple in the passband. A decoupling stage is used to avoid the influence of the input impedance on the filter's characteristics. The attenuation is about 55 dB at 710 Hz and reaches 100 dB at 1.4 times the corner frequency. The filter is limited in practice to the ± 0.25 dB ripple and does not exceed 0.5 dB at 0.9 fc.